

D&L Design Group, Inc.

HYDRAULIC / HYDROLOGIC CALCULATIONS

**Residential Subdivision
at
153 Paxton Road
Leicester, Massachusetts**

Prepared For:

Schold Development

Prepared By:

**D & L Design Group, Inc.
115 Water Street
Milford, Ma 01757**

August 29, 2022

Revised February 21, 2023



115 Water Street, Milford MA 01757 (P) 508-408-2577

TABLE OF CONTENTS

Cover Page

Table of Contents

Drainage Summary

Stormwater Management Checklist

Stormwater Management Calculations

Standard #2 Peak Discharge Rates

Standard #3 Loss of Annual Recharge

Standard #4 80% TSS Removal

Standard #9 Operation & Maintenance Plan

Appendices

Pre-Development Diagram

Post- Development Diagram

Pre-Development Watershed Subcatchments

Post-Development Watershed Subcatchments

Soil Maps

Flood Map

D&L Design Group, Inc.

115 Water Street, Milford Ma 01757 (P) 508-408-2577

DRAINAGE SUMMARY

D & L Design Group Inc. is pleased to provide the following Hydraulic / Hydrologic analysis for 153 Paxton Street in the town of Leicester Massachusetts. The existing site consists of 60 acres of un-developed land adjacent to Sargent Pond. The hydrologic conditions were analyzed using TR-55 and HydroCAD® for the 2, 10, 50 and 100 year storm events utilizing NOAA Atlas 14+, 24 hour Rainfall events.

The project will also consist of the construction a Open Space Development that will consist of 10 Lots. The development will consist of the construction of a 1,700 linear foot roadway that is 26 feet of pavement and sidewalk on one side of the roadway. The development will also consist of the construction of a proposed drainage system that will consist of drain manhole to catch basin design that will collect and direct runoff generated to two infiltration basins. The proposed single family houses will be serviced by town water and all house will be on sewer. The proposed sewer system will consist of individual pump stations that will be connected into a 2 inch low pressure line within the new roadway that will connect to existing sewer in Paxton Street. The proposed project will also proposed to fill 3,600 s.f. of bordering vegetated wetlands and the project will proposed to replicate 4,500 s.f. of wetlands.

EXISTING CONDITIONS:

The site is abutted by Paxton Street. The existing site consists of 60 acres of un-developed land that abuts Sargent Pond. The topography slopes from North to South at elevations 1015 to 914. There are wetlands located on the lot the first wetland is located in the middle of the project that flows from North to South. The second wetland is located along the west property line.

For the purpose of the analysis of the effect on site development, the site was analyzed as two independent watersheds. In the Pre-Development Condition, Subcatchment 1 & 2 represent the tributary areas of the property that flows to the Sargent Pond and Subcatchment 3 & 4 flow to the wetlands that is located in the middle of the parcel that flows toward Sargent Pond.

According to the online USGS soil survey, the analyzed area consists of soils with "C" hydrologic ratings. On site soil testing confirms. The cover consists of grass area and paved areas.

PROPOSED CONDITIONS:

The project will also consist of the construction a Open Space Development that will consist of 10 Lots. The development will consist of the construction of a 1,700 linear foot roadway that is 26 feet of pavement and sidewalk on one side of the roadway.

The site will be designed to support the project and control stormwater in accordance with the Massachusetts Stormwater Management Policy. The development includes the construction of two drainage open basin with catch basins and drain manholes to provide stormwater treatment and attenuation to reduce the impact of surface alterations.

STORMWATER MANAGEMENT CHECKLIST



Checklist for Stormwater Report

B. Stormwater Checklist and Certification

The following checklist is intended to serve as a guide for applicants as to the elements that ordinarily need to be addressed in a complete Stormwater Report. The checklist is also intended to provide conservation commissions and other reviewing authorities with a summary of the components necessary for a comprehensive Stormwater Report that addresses the ten Stormwater Standards.

Note: Because stormwater requirements vary from project to project, it is possible that a complete Stormwater Report may not include information on some of the subjects specified in the Checklist. If it is determined that a specific item does not apply to the project under review, please note that the item is not applicable (N.A.) and provide the reasons for that determination.

A complete checklist must include the Certification set forth below signed by the Registered Professional Engineer who prepared the Stormwater Report.

Registered Professional Engineer's Certification

I have reviewed the Stormwater Report, including the soil evaluation, computations, Long-term Pollution Prevention Plan, the Construction Period Erosion and Sedimentation Control Plan (if included), the Long-term Post-Construction Operation and Maintenance Plan, the Illicit Discharge Compliance Statement (if included) and the plans showing the stormwater management system, and have determined that they have been prepared in accordance with the requirements of the Stormwater Management Standards as further elaborated by the Massachusetts Stormwater Handbook. I have also determined that the information presented in the Stormwater Checklist is accurate and that the information presented in the Stormwater Report accurately reflects conditions at the site as of the date of this permit application.

Registered Professional Engineer Block and Signature

Signature and Date

Checklist

Project Type: Is the application for new development, redevelopment, or a mix of new and redevelopment?

☐ New development

Redevelopment

☒ Mix of New Development and Redevelopment



Checklist for Stormwater Report

Checklist (continued)

LID Measures: Stormwater Standards require LID measures to be considered. Document what environmentally sensitive design and LID Techniques were considered during the planning and design of the project:

- ☒ No disturbance to any Wetland Resource Areas
- ☐ Site Design Practices (e.g. clustered development, reduced frontage setbacks)
- ☐ Reduced Impervious Area (Redevelopment Only)
- ☐ Minimizing disturbance to existing trees and shrubs
- ☐ LID Site Design Credit Requested:
 - ☐ Credit 1
 - ☐ Credit 2
 - ☐ Credit 3

Use of "country drainage" versus curb and gutter conveyance and pipe

- ☐ Bioretention Cells (includes Rain Gardens)
- ☐ Constructed Stormwater Wetlands (includes Gravel Wetlands designs)
- ☐ Treebox Filter
 - Water Quality Swale
 - Grass Channel
- ☐ Green Roof
- ☐ Other (describe): _____

Standard 1: No New Untreated Discharges

- ☒ No new untreated discharges
- ☒ Outlets have been designed so there is no erosion or scour to wetlands and waters of the Commonwealth
- ☒ Supporting calculations specified in Volume 3 of the Massachusetts Stormwater Handbook included.



Checklist for Stormwater Report

Checklist (continued)

Standard 2: Peak Rate Attenuation

- ☐ Standard 2 waiver requested because the project is located in land subject to coastal storm flowage and stormwater discharge is to a wetland subject to coastal flooding.
- ☒ Evaluation provided to determine whether off-site flooding increases during the 100-year 24-hour storm.
- ☒ Calculations provided to show that post-development peak discharge rates do not exceed pre-development rates for the 2-year and 10-year 24-hour storms. If evaluation shows that off-site flooding increases during the 100-year 24-hour storm, calculations are also provided to show that post-development peak discharge rates do not exceed pre-development rates for the 100-year 24-hour storm.

Standard 3: Recharge

- ☒ Soil Analysis provided.
- ☒ Required Recharge Volume calculation provided.
- ☐ Required Recharge volume reduced through use of the LID site Design Credits.
- ☒ Sizing the infiltration, BMPs is based on the following method: Check the method used.
 - ☒ Static
 - ☐ Simple Dynamic
 - ☐ Dynamic Field¹
- ☐ Runoff from all impervious areas at the site discharging to the infiltration BMP.
- ☒ Runoff from all impervious areas at the site is *not* discharging to the infiltration BMP and calculations are provided showing that the drainage area contributing runoff to the infiltration BMPs is sufficient to generate the required recharge volume.
- ☒ Recharge BMPs have been sized to infiltrate the Required Recharge Volume.
- ☐ Recharge BMPs have been sized to infiltrate the Required Recharge Volume *only* to the maximum extent practicable for the following reason:
 - ☐ Site is comprised solely of C and D soils and/or bedrock at the land surface
 - ☐ M.G.L. c. 21E sites pursuant to 310 CMR 40.0000
 - ☐ Solid Waste Landfill pursuant to 310 CMR 19.000
 - ☐ Project is otherwise subject to Stormwater Management Standards only to the maximum extent practicable.
- ☒ Calculations showing that the infiltration BMPs will drain in 72 hours are provided.
- ☐ Property includes a M.G.L. c. 21E site or a solid waste landfill and a mounding analysis is included.

¹ 80% TSS removal is required prior to discharge to infiltration BMP if Dynamic Field method is used.



Checklist for Stormwater Report

Checklist (continued)

Standard 3: Recharge (continued)

- ☒ The infiltration BMP is used to attenuate peak flows during storms greater than or equal to the 10-year 24-hour storm and separation to seasonal high groundwater is less than 4 feet and a mounding analysis is provided.
- ☐ Documentation is provided showing that infiltration BMPs do not adversely impact nearby wetland resource areas.

Standard 4: Water Quality

The Long-Term Pollution Prevention Plan typically includes the following:

- Good housekeeping practices;
 - Provisions for storing materials and waste products inside or under cover;
 - Vehicle washing controls;
 - Requirements for routine inspections and maintenance of stormwater BMPs;
 - Spill prevention and response plans;
 - Provisions for maintenance of lawns, gardens, and other landscaped areas;
 - Requirements for storage and use of fertilizers, herbicides, and pesticides;
 - Pet waste management provisions;
 - Provisions for operation and management of septic systems;
 - Provisions for solid waste management;
 - Snow disposal and plowing plans relative to Wetland Resource Areas;
 - Winter Road Salt and/or Sand Use and Storage restrictions;
 - Street sweeping schedules;
 - Provisions for prevention of illicit discharges to the stormwater management system;
 - Documentation that Stormwater BMPs are designed to provide for shutdown and containment in the event of a spill or discharges to or near critical areas or from LUHPPL;
 - Training for staff or personnel involved with implementing Long-Term Pollution Prevention Plan;
 - List of Emergency contacts for implementing Long-Term Pollution Prevention Plan.
- ☒ A Long-Term Pollution Prevention Plan is attached to Stormwater Report and is included as an attachment to the Wetlands Notice of Intent.
 - ☐ Treatment BMPs subject to the 44% TSS removal pretreatment requirement and the one inch rule for calculating the water quality volume are included, and discharge:
 - ☐ is within the Zone II or Interim Wellhead Protection Area
 - ☐ is near or to other critical areas
 - ☐ is within soils with a rapid infiltration rate (greater than 2.4 inches per hour)
 - ☐ involves runoff from land uses with higher potential pollutant loads.
 - ☐ The Required Water Quality Volume is reduced through use of the LID site Design Credits.
 - ☒ Calculations documenting that the treatment train meets the 80% TSS removal requirement and, if applicable, the 44% TSS removal pretreatment requirement, are provided.



Checklist for Stormwater Report

Checklist (continued)

Standard 4: Water Quality (continued)

- ☒ The BMP is sized (and calculations provided) based on:
 - ☒ The ½" or 1" Water Quality Volume or
 - ☐ The equivalent flow rate associated with the Water Quality Volume and documentation is provided showing that the BMP treats the required water quality volume.
- ☒ The applicant proposes to use proprietary BMPs, and documentation supporting use of proprietary BMP and proposed TSS removal rate is provided. This documentation may be in the form of the proprietary BMP checklist found in Volume 2, Chapter 4 of the Massachusetts Stormwater Handbook and submitting copies of the TARP Report, STEP Report, and/or other third party studies verifying performance of the proprietary BMPs.
- ☐ A TMDL exists that indicates a need to reduce pollutants other than TSS and documentation showing that the BMPs selected are consistent with the TMDL is provided.

Standard 5: Land Uses With Higher Potential Pollutant Loads (LUHPPLs)

- ☐ The NPDES Multi-Sector General Permit covers the land use and the Stormwater Pollution Prevention Plan (SWPPP) has been included with the Stormwater Report.
- ☐ The NPDES Multi-Sector General Permit covers the land use and the SWPPP will be submitted **prior to** the discharge of stormwater to the post-construction stormwater BMPs.
- ☐ The NPDES Multi-Sector General Permit does **not** cover the land use.
- ☐ LUHPPLs are located at the site and industry specific source control and pollution prevention measures have been proposed to reduce or eliminate the exposure of LUHPPLs to rain, snow, snow melt and runoff, and been included in the long term Pollution Prevention Plan.
- ☐ All exposure has been eliminated.
- ☐ All exposure has **not** been eliminated and all BMPs selected are on MassDEP LUHPPL list.
- ☐ The LUHPPL has the potential to generate runoff with moderate to higher concentrations of oil and grease (e.g. all parking lots with >1000 vehicle trips per day) and the treatment train includes an oil grit separator, a filtering bioretention area, a sand filter or equivalent.

Standard 6: Critical Areas

- ☒ The discharge is near or to a critical area and the treatment train includes only BMPs that MassDEP has approved for stormwater discharges to or near that particular class of critical area.
- ☒ Critical areas and BMPs are identified in the Stormwater Report.



Checklist for Stormwater Report

Checklist (continued)

Standard 7: Redevelopments and Other Projects Subject to the Standards only to the maximum extent practicable

- ☒ The project is subject to the Stormwater Management Standards only to the maximum Extent Practicable as a:
- ☐ Limited Project
 - ☐ Small Residential Projects: 5-9 single family houses or 5-9 units in a multi-family development provided there is no discharge that may potentially affect a critical area.
 - ☐ Small Residential Projects: 2-4 single family houses or 2-4 units in a multi-family development with a discharge to a critical area
 - ☐ Marina and/or boatyard provided the hull painting, service and maintenance areas are protected from exposure to rain, snow, snow melt and runoff
 - ☐ Bike Path and/or Foot Path
- Redevelopment Project
- ☒ Redevelopment portion of mix of new and redevelopment.
- ☐ Certain standards are not fully met (Standard No. 1, 8, 9, and 10 must always be fully met) and an explanation of why these standards are not met is contained in the Stormwater Report.
- ☐ The project involves redevelopment and a description of all measures that have been taken to improve existing conditions is provided in the Stormwater Report. The redevelopment checklist found in Volume 2 Chapter 3 of the Massachusetts Stormwater Handbook may be used to document that the proposed stormwater management system (a) complies with Standards 2, 3 and the pretreatment and structural BMP requirements of Standards 4-6 to the maximum extent practicable and (b) improves existing conditions.

Standard 8: Construction Period Pollution Prevention and Erosion and Sedimentation Control

A Construction Period Pollution Prevention and Erosion and Sedimentation Control Plan must include the following information:

- Narrative;
 - Construction Period Operation and Maintenance Plan;
 - Names of Persons or Entity Responsible for Plan Compliance;
 - Construction Period Pollution Prevention Measures;
 - Erosion and Sedimentation Control Plan Drawings;
 - Detail drawings and specifications for erosion control BMPs, including sizing calculations;
 - Vegetation Planning;
 - Site Development Plan;
 - Construction Sequencing Plan;
 - Sequencing of Erosion and Sedimentation Controls;
 - Operation and Maintenance of Erosion and Sedimentation Controls;
 - Inspection Schedule;
 - Maintenance Schedule;
 - Inspection and Maintenance Log Form.
- ☒ A Construction Period Pollution Prevention and Erosion and Sedimentation Control Plan containing the information set forth above has been included in the Stormwater Report.



Checklist for Stormwater Report

Checklist (continued)

Standard 8: Construction Period Pollution Prevention and Erosion and Sedimentation Control (continued)

- ☐ The project is highly complex and information is included in the Stormwater Report that explains why it is not possible to submit the Construction Period Pollution Prevention and Erosion and Sedimentation Control Plan with the application. A Construction Period Pollution Prevention and Erosion and Sedimentation Control has **not** been included in the Stormwater Report but will be submitted **before** land disturbance begins.
- ☐ The project is **not** covered by a NPDES Construction General Permit.
- ☐ The project is covered by a NPDES Construction General Permit and a copy of the SWPPP is in the Stormwater Report.
- ☒ The project is covered by a NPDES Construction General Permit but no SWPPP been submitted. The SWPPP will be submitted BEFORE land disturbance begins.

Standard 9: Operation and Maintenance Plan

- ☒ The Post Construction Operation and Maintenance Plan is included in the Stormwater Report and includes the following information:
 - ☒ Name of the stormwater management system owners;
 - ☒ Party responsible for operation and maintenance;
 - ☒ Schedule for implementation of routine and non-routine maintenance tasks;
 - ☒ Plan showing the location of all stormwater BMPs maintenance access areas;
 - ☐ Description and delineation of public safety features;
 - ☒ Estimated operation and maintenance budget; and
 - ☒ Operation and Maintenance Log Form.
- ☐ The responsible party is **not** the owner of the parcel where the BMP is located and the Stormwater Report includes the following submissions:
 - ☐ A copy of the legal instrument (deed, homeowner's association, utility trust or other legal entity) that establishes the terms of and legal responsibility for the operation and maintenance of the project site stormwater BMPs;
 - ☐ A plan and easement deed that allows site access for the legal entity to operate and maintain BMP functions.

Standard 10: Prohibition of Illicit Discharges

- ☒ The Long-Term Pollution Prevention Plan includes measures to prevent illicit discharges;
- ☒ An Illicit Discharge Compliance Statement is attached;
- ☐ NO Illicit Discharge Compliance Statement is attached but will be submitted **prior to** the discharge of any stormwater to post-construction BMPs.

In order to analyze the surface water flows, the site was divided into multiple Subcatchments, Ponds and a Reaches. The Post-Development are then compared to the Pre-Development Conditions.

In summary, the peak rates of runoff were compared under pre-development and post-development conditions for analysis of the 2 year, 10 year, 50 year and 100 year storm events. The following is a **Peak Discharge Summary Table**:

Design Point Analysis:

Watershed		Design Event			
		2 Year	10 Year	50 Year	100 Year
Pre-Development	IP-E1	29.57	72.57	125.59	151.24
	IP-E2	9.75	23.97	41.44	49.90
Post Development	IP-1P	29.31	72.09	125.08	149.57
	IP-2P	9.63	23.46	40.93	48.87

DEP Stormwater Management Standards:

Standard #1: The proposed changes will not cause erosion in adjacent water of the Commonwealth, as BMP measures are proposed in accordance with the design requirements of the Stormwater Management handbook. The Erosion & Sedimentation Control Plan provides for the installation of siltation barriers, temporary basins, temporary construction entrances and outlines intermediary measures to control runoff during construction and after construction.

Standard #2: The proposed development peak discharge rates for the total off-site flow are less than or equal to pre-development discharge rates for the 2 year, 10 year, 50 year and 100 year storm events for the design points analyzed. Attached calculations show how the site mitigates the increased flow rates due to surface changes from the site development.

Standard #3: The roof drain runoff is directed to two direct infiltration basins that meets the recharge requirement for Class C Soils. Basins 1 & 2 designed to infiltrate runoff from the roadway and driveway areas after pre-treatment. Infiltration depths are designed to drain in under 72 hours as required by the Policy.

Standard #4: Over 80% TSS shall occur based on the BMP measurements provided. The treatment train varies for each section. TSS worksheets are provided in the report for each treatment train in the site. The water quality volume was determined using 0.5" of runoff over the proposed impervious area.

Standard #5: The proposed development will not generate higher potential pollutant loads and therefore will not require additional BMP practices.

Standard #6: The proposed project is not near a critical area.

Standard #7: The proposed project is not a redevelopment project.

Standard #8: Erosion and sediment control measures are proposed as part of the proposed project.

Standard #9: An Operation & Maintenance plan is provided within this document

Standard #10: This project does not propose any illicit discharges.

STANDARD #2- PEAK DISCHARGE RATES

STANDARD #3 –LOSS OF ANNUAL RECHARGE

The site is developed along roadway and un-developed in the area along Route 146. The site design incorporates direct recharge of roof drains to infiltration basin. Basins 1 designed to infiltrate retained runoff after pre-treatment. Soils were found to be Class C permeability.

The table below shows the required and provided recharge volumes for the project. As shown, the proposed condition exceeds the minimum requirement for the additional impervious areas.

Recharge Volume Summary

Soil Type	Recharge Factor (in. runoff)	Existing Impervious Area (sf)	Additional Impervious Area (sf)	Min. Req. Recharge Volume (cf)
A	0.60	0	0	0
B	0.35	0	0	0
C	0.25	0	121,224	2,525
D	0.10	0	0	0
Total Required				2,525

Standard #3 Only Applies to Additional Impervious

Provided Recharge Volume (cf)		
Basin 1		1,185
Basin 2		2,129
Total Provided		3,214

Rechage Volume Calculation:

$$R_v = F \times I$$

R_v = Required Rechareg Volume

F = Recharge Factor

I = Total Impervious Area

$$R_v = (0.25'') / (1' / 12'') \times 121,224 \text{ s.f.} = 2,525.4 \text{ cf (Required)}$$

Provided Infiltration is 3,214 cf taken from Stage Storage Worksheet

Drawdown Calculation:

$$Time_{drawdown} = \frac{R_v}{(K)(Bottom\ Area)}$$

Basin#1:

Where:

R_v = Storage Volume (1,185 c.f.)

K = Saturated Hydraulic Conductivity For "Static" and "Simple Dynamic" Methods, use Rawls Rate (see Table 2.3.3). For "Dynamic Field" Method, use 50% of the in-situ saturated hydraulic conductivity. 1.02 in/hour

Bottom Area = Bottom Area of Recharge Structure (2,221 s.f.)

$$Time = 1,185 \text{ c.f.} / (1.02 \text{ in/hour})(1\text{inch}/12\text{foot})(2,221 \text{ s.f.}) = 6 \text{ hours}$$

Basin#2:

Where:

R_v = Storage Volume (2,129 c.f.)

K = Saturated Hydraulic Conductivity For "Static" and "Simple Dynamic" Methods, use Rawls Rate (see Table 2.3.3). For "Dynamic Field" Method, use 50% of the in-situ saturated hydraulic conductivity. 1.02 in/hour

Bottom Area = Bottom Area of Recharge Structure (3,726 s.f.)

$$Time = 2,129 \text{ c.f.} / (1.02 \text{ in/hour})(1\text{inch}/12\text{foot})(3,726 \text{ s.f.}) = 7 \text{ hours}$$

STANDARD #4- 80% TSS REMOVAL

ESTIMATED PROPOSED NEW PAVED COVER= 93,424 S.F.
Driveway & Roadway Areas

REQUIRED WATER QUALITY VOLUME:

Water Quality Volume		
Required Treatment Volume	1.0	Inches Over Impervious Areas
Watershed Series	Paved Area	Water Quality Volume
BASIN 1	19,500	1,618
BASIN 2	54,525	3,894

Provided Water Quality Volume from Stage Storage Worksheet= 7,244 cf

The design of the drainage system is such that the site is routed through a series of treatment BMP's meeting the Standard.

Impervious Area Basin1 is 19,500 s.f. (1in/1'/12in) = 1,618 c.f. (3,350 c.f. Provided)
Impervious Area Basin2 is 54,525 s.f. (1in/1'/12in) = 4,525 c.f. (3,894 c.f. Provided)

****PLEASE SEE THE FOLLOWING PAGES FOR TSS REMOVAL CALCULATIONS.**

STANDARD #9- OPERATION & MAINTENANCE

OPERATION & MAINTENANCE PLAN:

CURRENT OWNER & RESPONSIBLE PARTY:

Central Land Development

(Contractor shall be responsible during construction)

FUTURE OWNER & RESPONSIBLE PARTY:

Central Land Development

DURING CONSTRUCTION:

SILT FENCE BARRIER:

The silt fence barrier shall be installed prior to construction.

During construction the contractor shall inspect the silt fence barrier on a weekly basis and after any significant rainstorm resulting in greater than 0.5" of rainfall. The barrier shall be inspected for any breaches or disturbed silt fence and repaired immediately.

After construction the barrier shall be maintained as stated above until all new areas are vegetated.

After construction these duties shall transfer to the property owner.

CONSTRUCTION ENTRANCE APRONS:

Construction aprons shall be installed to protect Paxton Street. The construction entrance apron shall be installed prior to commencement of construction and shall be inspected weekly. The construction entrance apron shall be replaced when debris becomes noticeable on the existing pavement surfaces leading to and from the construction site.

SLOPE STABILIZATION:

The slope stabilization controls shall be installed immediately upon obtaining final grades as shown on the project plans. Slopes in the swale area shall be stabilized according to the details provided. All 3:1 slopes established on-site shall be loamed and seeded as soon as weather permits. Any 2:1 slopes established shall be covered with slope stabilization fabric, then loamed

D&L Design Group, Inc.

115 Water Street, Milford Ma 01757 (P) 508-408-2577

and seeded as soon as weather permits. Areas in failure shall be re-graded to final grade and stabilized as necessary.

TEMPORARY BASINS:

The temporary basins shall be inspected immediately after storm events and cleaned to remove sediment build-up. Outfalls shall be inspected for erosion or scouring. Additional rip rap shall be added as required to minimize erosion.

CATCH BASINS:

Catch basins shall entrances shall have temporary stone or other filtration device installed around inlet to prevent sediment deposits. Sediment shall be removed when accumulation exceeds 1" depth on paved surfaces.

CHECK DAMS:

Check Dams shall be inspected weekly and after rainfall in excess of 0.5". Accumulated sediment shall be removed when depth exceeds 3" on the upstream sided of the dam. Stone or fabric shall be replaced when evidence of clogging is present.

CONSTRUCTION COMPLETION:

The entire stormwater management system shall be inspected upon completion of construction. Portions of the system containing sediment shall be cleaned and all sediment properly removed.

AFTER CONSTRUCTION:

CATCH BASINS:

At a minimum, the catch basins shall be inspected and cleaned on a quarterly basis. It is preferred that collection of accumulated sediment shall be accomplished by means of vacuum pumping and not by means of a clamshell bucket. Disposal of accumulated sediment shall be performed in accordance with applicable local, state, and federal guidelines and regulations.

SEDIMENT FORBAYS

Sediment forebays shall be visually inspected monthly for accumulation of debris, slope failure, or stone displacement. Slopes shall be mowed quarterly. Bottom shall be swept, vacuumed of accumulated debris semi-annually.

OPEN INFILTRATION BASIN

The following guidelines shall be adhered to for the operation and maintenance stormwater management system:

- A. The owner shall keep a maintenance log which shall include details of any events which would have an effect on the system's operational capacity.
- B. The operation and maintenance procedure shall be reviewed periodically and changed to meet site conditions.
- C. Maintenance of the stormwater management system shall be performed by qualified workers and shall follow applicable occupational health and safety requirements.
- D. Debris removed from the stormwater management system shall be disposed of in accordance with applicable laws and regulations.

- Monthly in first year - Check inlets and outlets for clogging and remove any debris, as required. Spring and Fall Check inlets and outlets for clogging and remove any debris, as required.

One year after commissioning and every third year following Check inlets and outlets for clogging and remove any debris, as required

LONG TERM POLLUTION PREVENTION PLAN

The following are the material management practices that shall be used to reduce the risk of spills or other accidental exposure of materials and substances to stormwater runoff.

Good Housekeeping: The following good housekeeping practices will be followed on site during the construction project and continued upon completion of the construction activities.

1. A concerted effort shall be made to store only enough product required to complete a particular task.
2. All materials stored on site shall be stored in a neat and orderly fashion in their appropriate containers and, if possible, under a roof or other secure enclosure.
3. Products shall be kept in their original containers with the original manufacture's label.
4. Substances shall not be mixed with one another unless recommended by the manufacturer.
5. Whenever possible, all of a product shall be used up before disposing of the container.
6. Manufacture's recommendations for proper use and disposal shall be followed.
7. The site superintendent shall inspect daily to ensure proper use and disposal of materials on site.

Hazardous Products: The following practices are intended to reduce the risks associated with hazardous materials.

1. Products shall be kept in original containers unless they are not re-sealable.
2. Where feasible, the original label and material safety data shall be retained, whereas they contain important product information.
3. If surplus product must be disposed of, follow manufacturers or local and State recommended methods for proper disposal.

Product Specific Practices: The following product-specific practices shall be followed on site:
Petroleum Products:

1. All on site vehicles shall be monitored for leaks and receive regular preventative maintenance to reduce the risk of leakage.
2. Petroleum products shall be stored in tightly sealed containers which are clearly labeled.
3. Petroleum Products shall be stored in compliance with Fire Marshall regulations.

Bituminous Concrete:

Any bituminous concrete or asphalt substances used on site shall be applied according to the manufacturer's recommendations.

Fertilizers:

Fertilizers shall be applied in the minimum amounts recommended by the manufacturer. Once applied, fertilizers shall be worked into the soil to limit exposure to stormwater. Storage shall be in a covered shed or trailer. The contents of any partially-used bags of fertilizer shall be transferred to a sealable plastic bag or bin to avoid spills

Paints:

1. All containers shall be tightly sealed and stored when not required for use.
2. Excess paint shall not be discharged into any catch basin, drain manhole or any portion of the stormwater management system.
3. Excess paint shall be properly disposed of according to manufacturer's recommendations or State and local regulations.

Concrete Trucks:

Concrete trucks shall not be allowed to wash out or discharge surplus concrete or drum wash water on site.




SPILL CONTROL PRACTICES

In addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices shall be followed for spill prevention and cleanup:

1. Manufacturer's recommended methods for cleanup shall be readily available at the onsite trailer, and site personnel shall be made aware of the procedures and the location of the information.
2. Materials and equipment necessary for spill clean up shall be kept in the material storage area on site. Equipment and materials shall include, but not be limited to, brooms, dust pans, mops, rags, gloves, goggles, kitty litter, sand, sawdust and plastic and metal trash containers specifically for this purpose.
3. All spills shall be cleaned up immediately after discovery.
4. The spill area shall be kept well ventilated, and personnel shall wear appropriate protective clothing to prevent injury from contact with hazardous substance.
5. Spills of toxic or hazardous material shall be reported to the appropriate State and/or local authority in accordance with local and/or State regulations.
6. The spill prevention plan shall be adjusted to include measures to prevent a particular type of spill from reoccurring and instructions on how to clean up the spill if there is

another occurrence. A description of the spill, what caused it, and the clean up measures shall also be included.

7. The "Manager" shall be the spill prevention and cleanup coordinator. The "Manager" shall designate at least three other site personnel who will be trained in the spill control practices identified above.

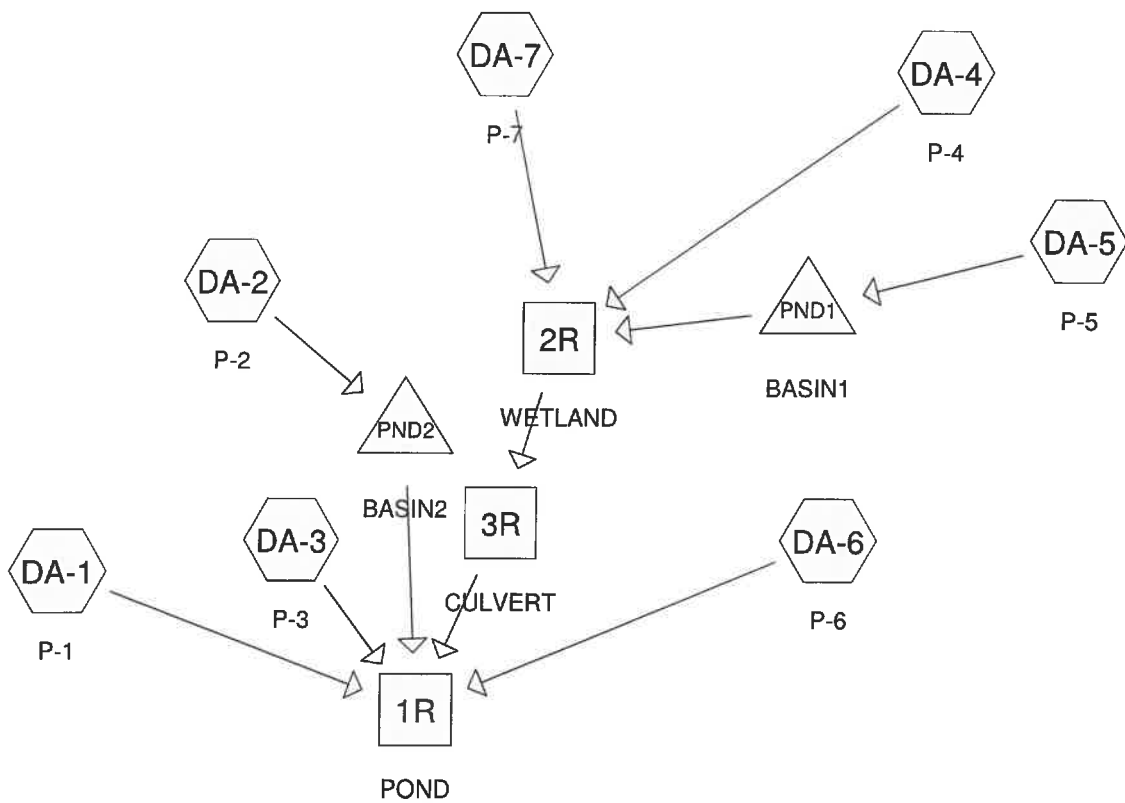

Routing Diagram for 21-153 P0st Development R1
 Prepared by {enter your company name here}, Printed 2/21/2023
 HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

21-153 POst Development R1

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 2

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
2.989	74	>75% Grass cover, Good, HSG C (DA-1, DA-2, DA-3, DA-5, DA-6)
2.783	98	Paved parking, HSG C (DA-1, DA-2, DA-3, DA-5, DA-6)
56.981	73	Woods, Fair, HSG C (DA-1, DA-2, DA-3, DA-4, DA-5, DA-6, DA-7)
62.753	74	TOTAL AREA

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Printed 2/21/2023

Page 3

Soil Listing (all nodes)

Area (acres)	Soil Group	Subcatchment Numbers
0.000	HSG A	
0.000	HSG B	
62.753	HSG C	DA-1, DA-2, DA-3, DA-4, DA-5, DA-6, DA-7
0.000	HSG D	
0.000	Other	
62.753		TOTAL AREA

21-153 POst Development R1

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 4

Ground Covers (all nodes)

HSG-A (acres)	HSG-B (acres)	HSG-C (acres)	HSG-D (acres)	Other (acres)	Total (acres)	Ground Cover	Subcatchment Numbers
0.000	0.000	2.989	0.000	0.000	2.989	>75% Grass cover, Good	DA-1, DA-2, DA-3, DA-5, DA-6
0.000	0.000	2.783	0.000	0.000	2.783	Paved parking	DA-1, DA-2, DA-3, DA-5, DA-6
0.000	0.000	56.981	0.000	0.000	56.981	Woods, Fair	DA-1, DA-2, DA-3, DA-4, DA-5, DA-6, DA-7
0.000	0.000	62.753	0.000	0.000	62.753	TOTAL AREA	

21-153 P0st Development R1

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 5

Pipe Listing (all nodes)

Line#	Node Number	In-Invert (feet)	Out-Invert (feet)	Length (feet)	Slope (ft/ft)	n	Diam/Width (inches)	Height (inches)	Inside-Fill (inches)
1	DA-2	0.00	0.00	350.0	0.0100	0.010	18.0	0.0	0.0
2	DA-5	0.00	0.00	120.0	0.0200	0.010	15.0	0.0	0.0
3	3R	924.00	920.00	55.0	0.0727	0.010	36.0	0.0	0.0

21-153 P0st Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 6

Time span=0.00-72.00 hrs, dt=0.05 hrs, 1441 points
 Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
 Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment DA-1: P-1 Runoff Area=911,170 sf 2.34% Impervious Runoff Depth=0.99"
 Flow Length=1,280' Tc=32.1 min CN=74 Runoff=12.53 cfs 1.729 af

Subcatchment DA-2: P-2 Runoff Area=335,021 sf 16.28% Impervious Runoff Depth=1.16"
 Flow Length=1,280' Tc=21.2 min CN=77 Runoff=6.64 cfs 0.745 af

Subcatchment DA-3: P-3 Runoff Area=325,676 sf 5.79% Impervious Runoff Depth=0.99"
 Flow Length=524' Slope=0.0300 '/' Tc=17.6 min CN=74 Runoff=5.76 cfs 0.618 af

Subcatchment DA-4: P-4 Runoff Area=521,761 sf 0.00% Impervious Runoff Depth=0.94"
 Flow Length=1,071' Tc=30.3 min CN=73 Runoff=6.89 cfs 0.937 af

Subcatchment DA-5: P-5 Runoff Area=318,322 sf 6.13% Impervious Runoff Depth=1.05"
 Flow Length=1,184' Tc=20.1 min CN=75 Runoff=5.70 cfs 0.637 af

Subcatchment DA-6: P-6 Runoff Area=196,038 sf 3.57% Impervious Runoff Depth=0.99"
 Tc=6.0 min CN=74 Runoff=4.86 cfs 0.372 af

Subcatchment DA-7: P-7 Runoff Area=125,523 sf 0.00% Impervious Runoff Depth=0.94"
 Tc=6.0 min CN=73 Runoff=2.91 cfs 0.225 af

Reach 1R: POND Inflow=29.31 cfs 4.849 af
 Outflow=29.31 cfs 4.849 af

Reach 2R: WETLAND Inflow=9.63 cfs 1.645 af
 Outflow=9.63 cfs 1.645 af

Reach 3R: CULVERT Avg. Flow Depth=0.42' Max Vel=16.28 fps Inflow=9.63 cfs 1.645 af
 36.0" Round Pipe n=0.010 L=55.0' S=0.0727 '/' Capacity=233.83 cfs Outflow=9.63 cfs 1.645 af

Pond PND1: BASIN1 Peak Elev=934.12' Storage=8,343 cf Inflow=5.70 cfs 0.637 af
 Discarded=0.13 cfs 0.155 af Primary=2.00 cfs 0.483 af Outflow=2.13 cfs 0.637 af

Pond PND2: BASIN2 Peak Elev=924.27' Storage=12,121 cf Inflow=6.64 cfs 0.745 af
 Discarded=0.16 cfs 0.259 af Primary=1.63 cfs 0.485 af Outflow=1.79 cfs 0.745 af

Total Runoff Area = 62.753 ac Runoff Volume = 5.263 af Average Runoff Depth = 1.01"
95.57% Pervious = 59.970 ac 4.43% Impervious = 2.783 ac

21-153 P0st Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 7

Summary for Subcatchment DA-1: P-1

Runoff = 12.53 cfs @ 12.49 hrs, Volume= 1.729 af, Depth= 0.99"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
878,323	73	Woods, Fair, HSG C
21,347	98	Paved parking, HSG C
11,500	74	>75% Grass cover, Good, HSG C
911,170	74	Weighted Average
889,823		97.66% Pervious Area
21,347		2.34% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
11.9	620	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
2.3	225	0.0100	1.61		Shallow Concentrated Flow, Travel Path C TO D
					Unpaved Kv= 16.1 fps
7.4	385	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH D TO E
					Woodland Kv= 5.0 fps
32.1	1,280	Total			

Subcatchment DA-1: P-1

Hydrograph

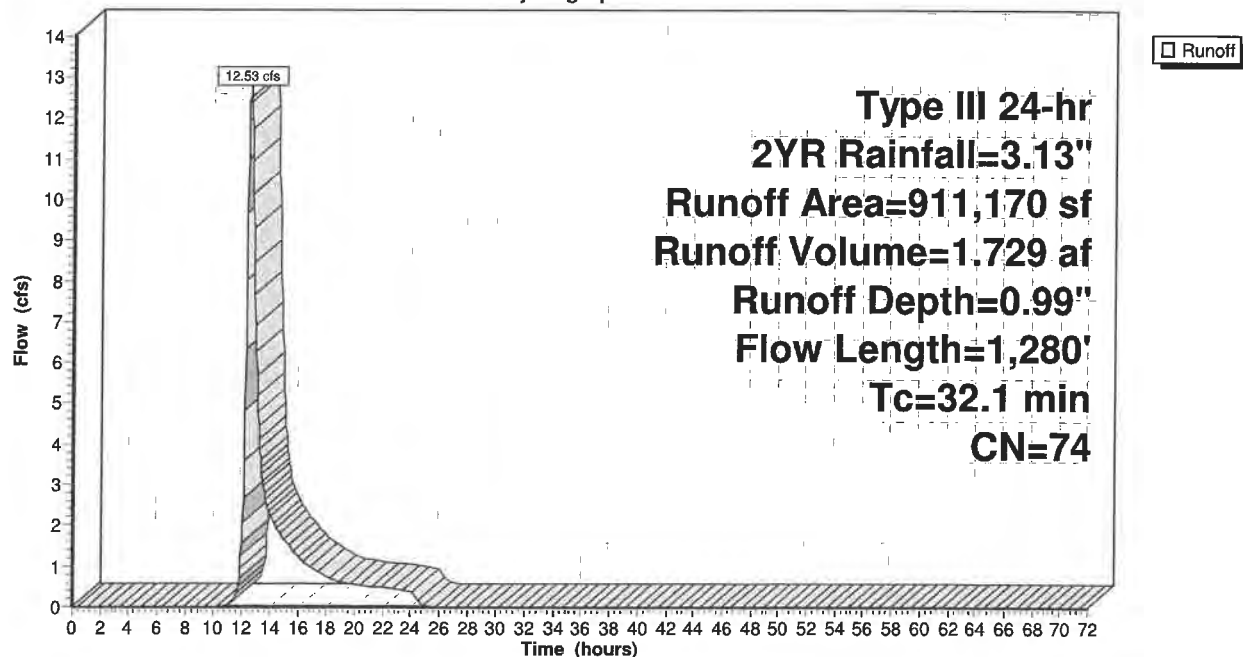

21-153 P0st Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 8

Summary for Subcatchment DA-2: P-2

Runoff = 6.64 cfs @ 12.31 hrs, Volume= 0.745 af, Depth= 1.16"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
273,495	73	Woods, Fair, HSG C
54,526	98	Paved parking, HSG C
7,000	74	>75% Grass cover, Good, HSG C
335,021	77	Weighted Average
280,495		83.72% Pervious Area
54,526		16.28% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.9	530	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
2.0	350	0.0200	2.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Paved Kv= 20.3 fps
0.8	350	0.0100	7.73	13.66	Pipe Channel, TRAVEL PATH D TO E 18.0" Round Area= 1.8 sf Perim= 4.7' r= 0.38' n= 0.010 PVC, smooth interior
21.2	1,280	Total			

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 9

Subcatchment DA-2: P-2

Hydrograph

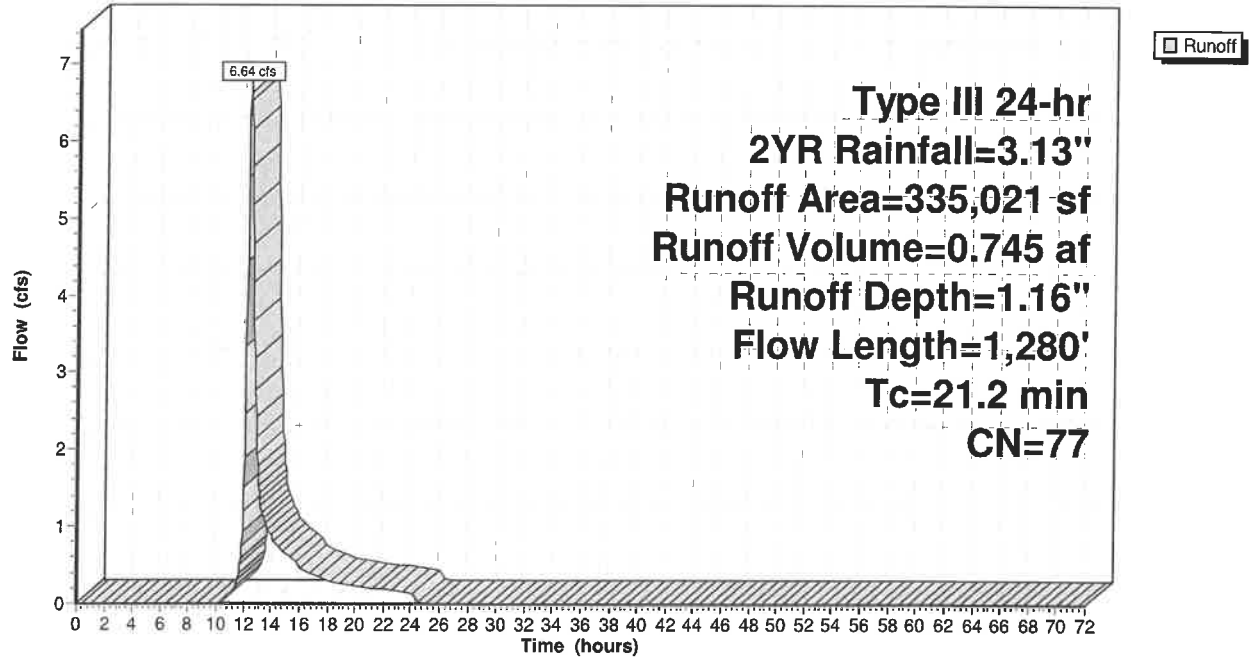

21-153 P0st Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 10

Summary for Subcatchment DA-3: P-3

Runoff = 5.76 cfs @ 12.27 hrs, Volume= 0.618 af, Depth= 0.99"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
296,825	73	Woods, Fair, HSG C
18,851	98	Paved parking, HSG C
10,000	74	>75% Grass cover, Good, HSG C
325,676	74	Weighted Average
306,825		94.21% Pervious Area
18,851		5.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
0.9	150	0.0300	2.79		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Unpaved Kv= 16.1 fps
6.2	324	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH C TO D
					Woodland Kv= 5.0 fps
17.6	524	Total			

Subcatchment DA-3: P-3

Hydrograph

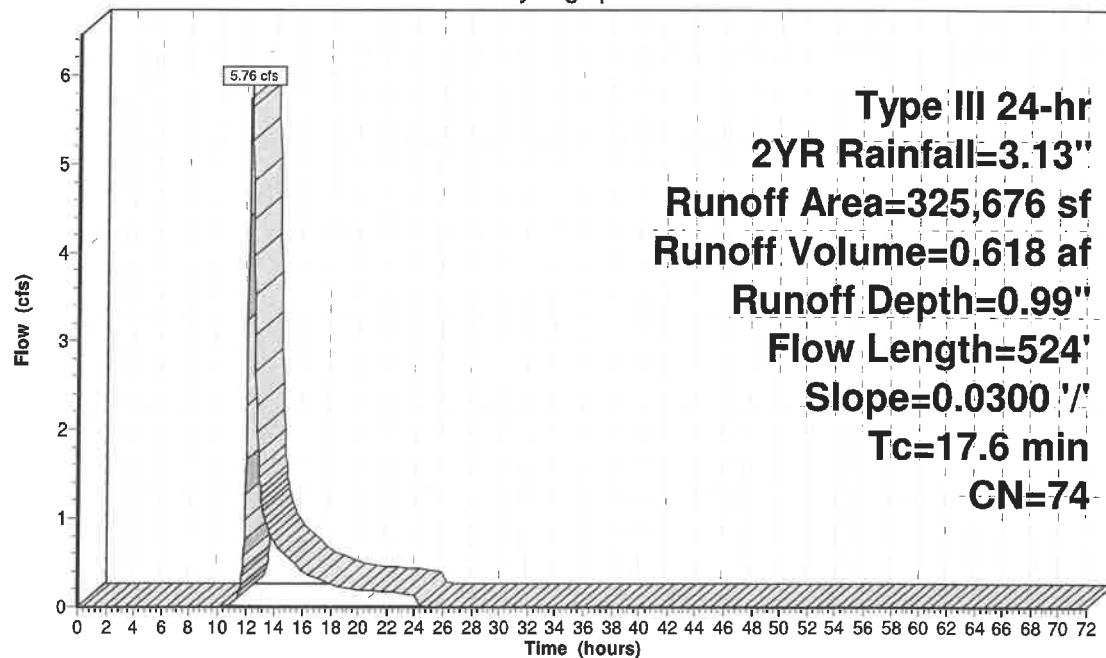

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 11

Summary for Subcatchment DA-4: P-4

Runoff = 6.89 cfs @ 12.47 hrs, Volume= 0.937 af, Depth= 0.94"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
521,761	73	Woods, Fair, HSG C
521,761		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	50	0.0200	0.07		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.6	321	0.0200	0.71		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
10.4	700	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
30.3	1,071	Total			

Subcatchment DA-4: P-4

Hydrograph

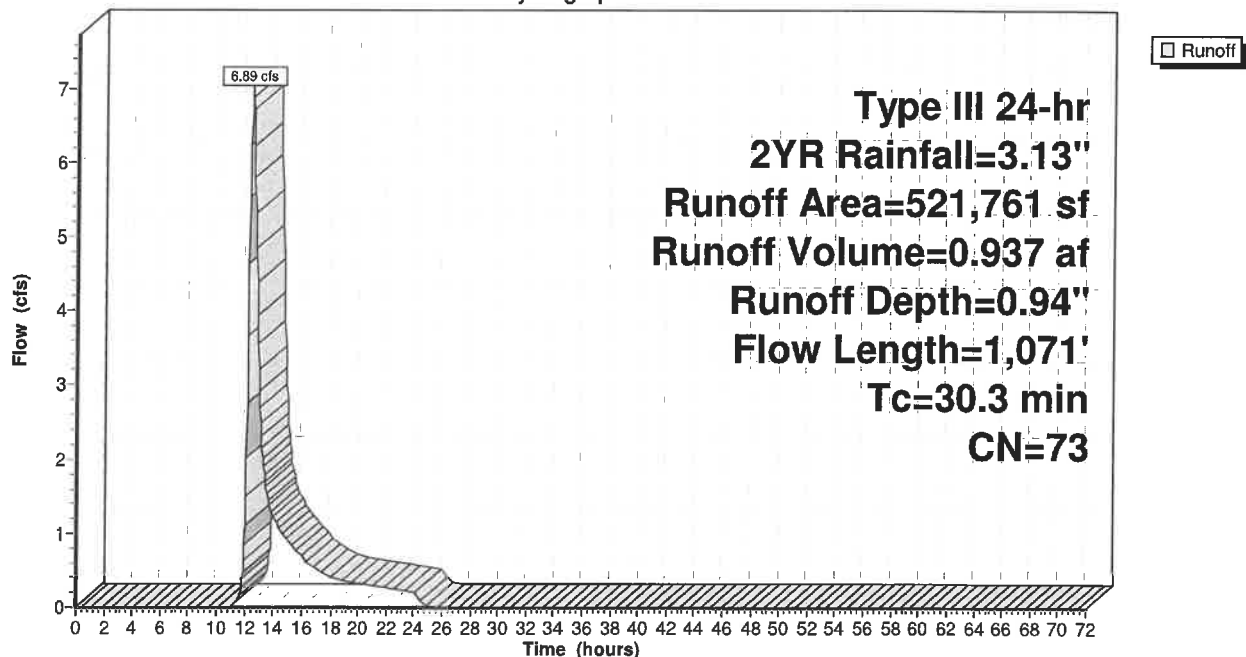

21-153 P-5 Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 12

Summary for Subcatchment DA-5: P-5

Runoff = 5.70 cfs @ 12.30 hrs, Volume= 0.637 af, Depth= 1.05"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
266,167	73	Woods, Fair, HSG C
19,500	98	Paved parking, HSG C
32,655	74	>75% Grass cover, Good, HSG C
318,322	75	Weighted Average
298,822		93.87% Pervious Area
19,500		6.13% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
8.2	50	0.0200	0.10		Sheet Flow, TRAVEL PATH A TO B Grass: Dense n= 0.240 P2= 3.20"
3.4	200	0.0200	0.99		Shallow Concentrated Flow, TRAVEL PATH B TO C Short Grass Pasture Kv= 7.0 fps
7.6	643	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
0.7	171	0.0400	4.06		Shallow Concentrated Flow, TRAVEL PATH D TO E Paved Kv= 20.3 fps
0.2	120	0.0200	9.68	11.88	Pipe Channel, TRAVEL PATH E TO F 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.010 PVC, smooth interior
20.1	1,184	Total			

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 13

Subcatchment DA-5: P-5

Hydrograph

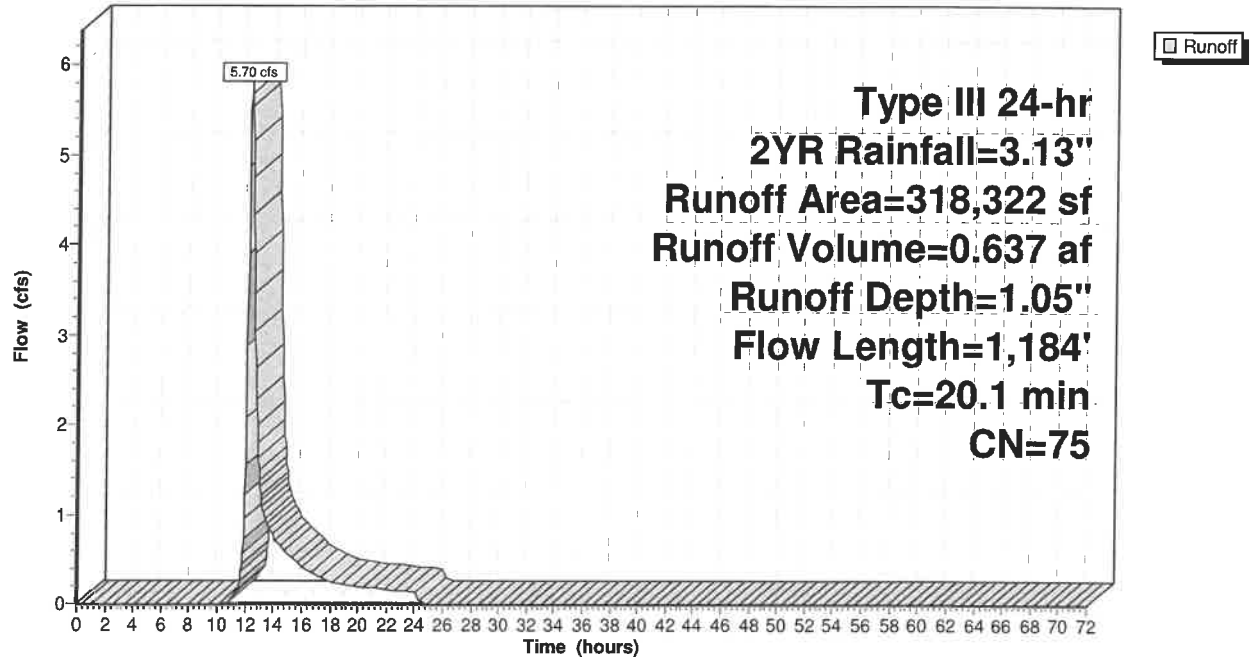

21-153 POst Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 14

Summary for Subcatchment DA-6: P-6

Runoff = 4.86 cfs @ 12.10 hrs, Volume= 0.372 af, Depth= 0.99"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
119,978	73	Woods, Fair, HSG C
69,060	74	>75% Grass cover, Good, HSG C
7,000	98	Paved parking, HSG C
196,038	74	Weighted Average
189,038		96.43% Pervious Area
7,000		3.57% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-6: P-6

Hydrograph

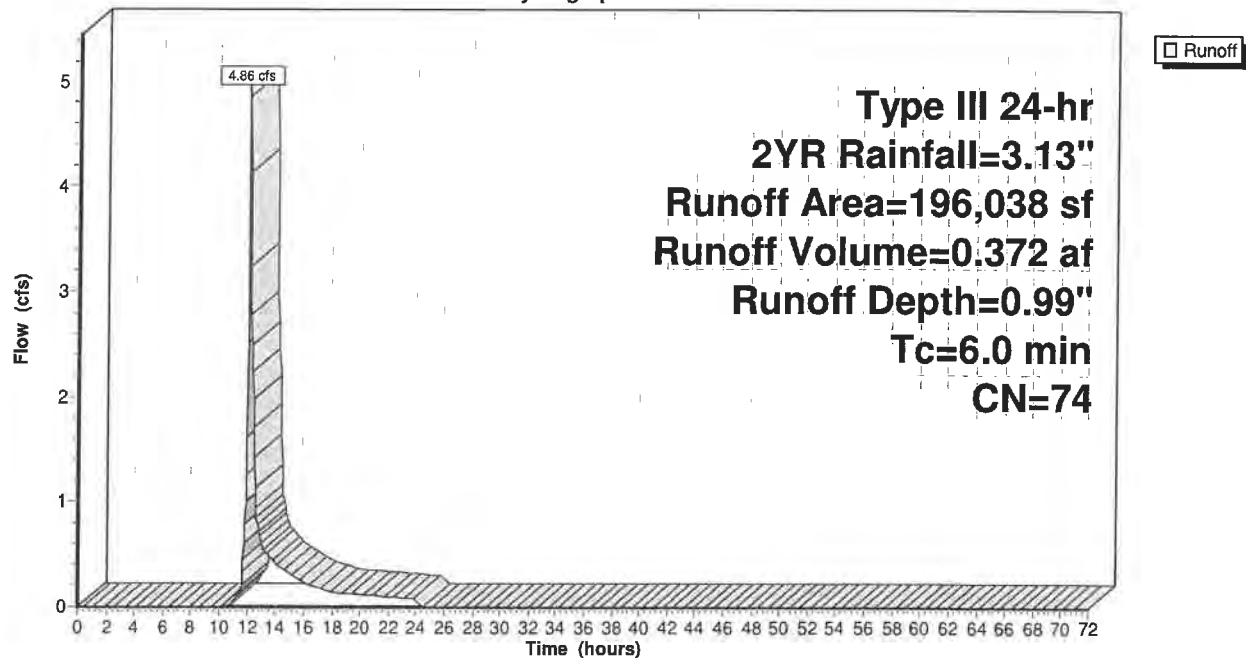

21-153 P0st Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 15

Summary for Subcatchment DA-7: P-7

Runoff = 2.91 cfs @ 12.10 hrs, Volume= 0.225 af, Depth= 0.94"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
125,523	73	Woods, Fair, HSG C
125,523		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-7: P-7

Hydrograph

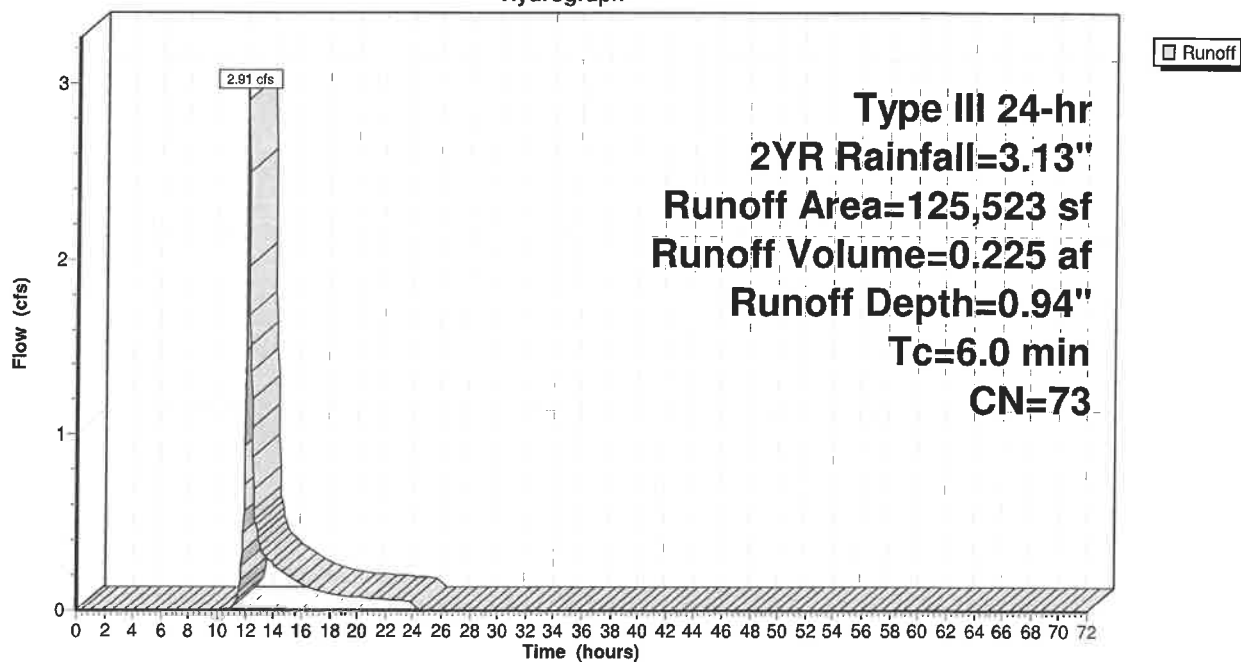

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 16


Summary for Reach 1R: POND

Inflow Area = 62.753 ac, 4.43% Impervious, Inflow Depth = 0.93" for 2YR event
Inflow = 29.31 cfs @ 12.43 hrs, Volume= 4.849 af
Outflow = 29.31 cfs @ 12.43 hrs, Volume= 4.849 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 1R: POND

Hydrograph

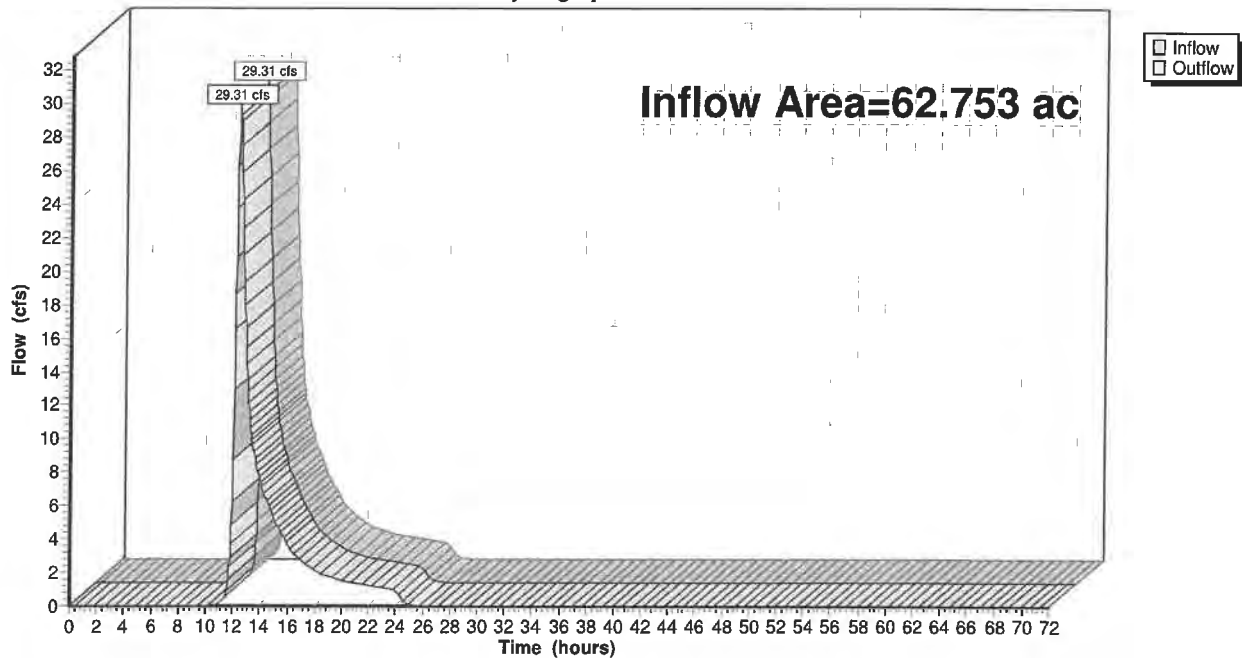

21-153 POst Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 17


Summary for Reach 2R: WETLAND

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 0.89" for 2YR event
Inflow = 9.63 cfs @ 12.45 hrs, Volume= 1.645 af
Outflow = 9.63 cfs @ 12.45 hrs, Volume= 1.645 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 2R: WETLAND

Hydrograph

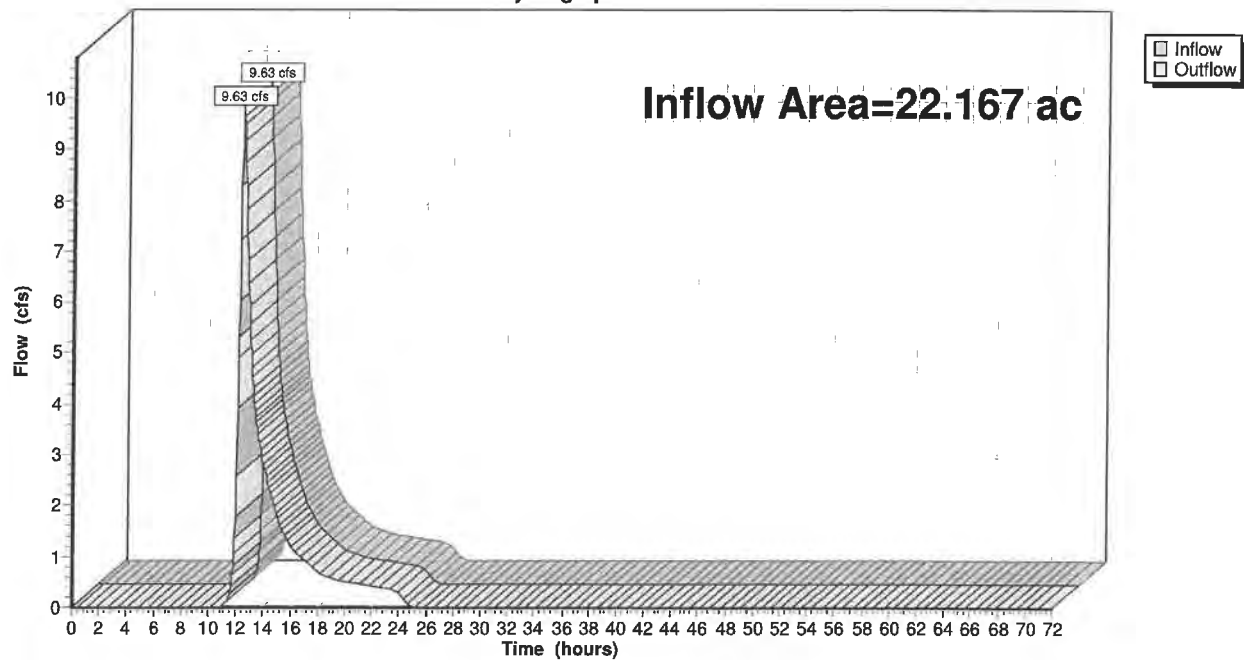

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 18

Summary for Reach 3R: CULVERT

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 0.89" for 2YR event
Inflow = 9.63 cfs @ 12.45 hrs, Volume= 1.645 af
Outflow = 9.63 cfs @ 12.45 hrs, Volume= 1.645 af, Atten= 0%, Lag= 0.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Max. Velocity= 16.28 fps, Min. Travel Time= 0.1 min

Avg. Velocity = 7.78 fps, Avg. Travel Time= 0.1 min

Peak Storage= 33 cf @ 12.45 hrs

Average Depth at Peak Storage= 0.42'

Bank-Full Depth= 3.00' Flow Area= 7.1 sf, Capacity= 233.83 cfs

36.0" Round Pipe

n= 0.010 PVC, smooth interior


Length= 55.0' Slope= 0.0727 '/'

Inlet Invert= 924.00', Outlet Invert= 920.00'



Reach 3R: CULVERT

Hydrograph

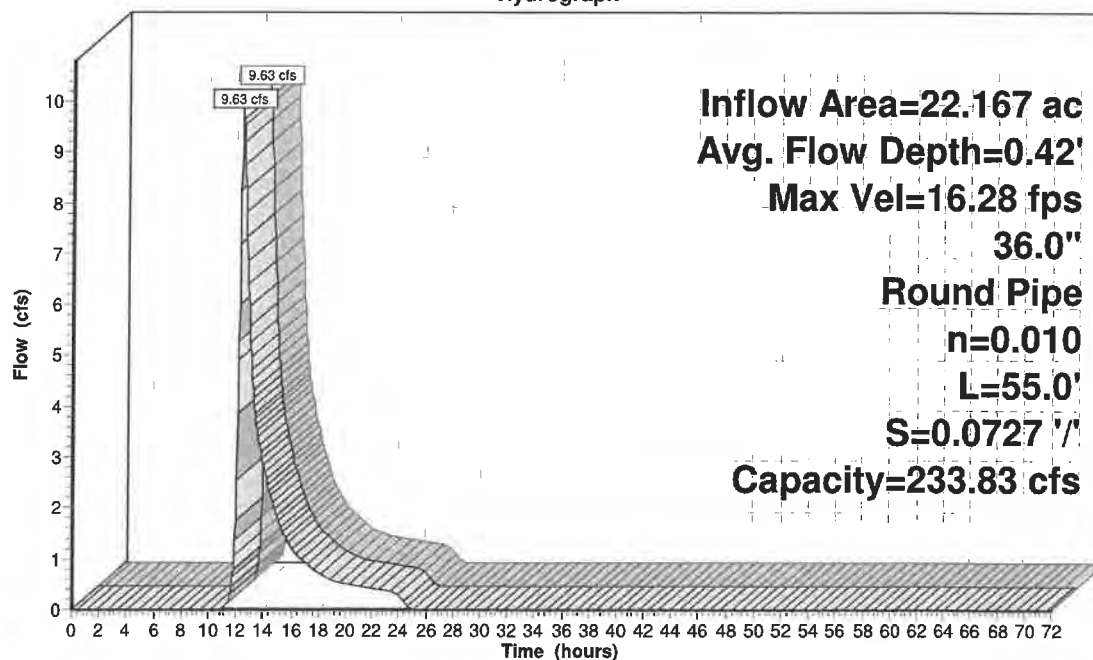

21-153 POst Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 19

Summary for Pond PND1: BASIN1

Inflow Area = 7.308 ac, 6.13% Impervious, Inflow Depth = 1.05" for 2YR event
 Inflow = 5.70 cfs @ 12.30 hrs, Volume= 0.637 af
 Outflow = 2.13 cfs @ 12.78 hrs, Volume= 0.637 af, Atten= 63%, Lag= 28.6 min
 Discarded = 0.13 cfs @ 12.78 hrs, Volume= 0.155 af
 Primary = 2.00 cfs @ 12.78 hrs, Volume= 0.483 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 934.12' @ 12.78 hrs Surf.Area= 5,582 sf Storage= 8,343 cf

Plug-Flow detention time= 115.5 min calculated for 0.637 af (100% of inflow)
 Center-of-Mass det. time= 115.9 min (989.2 - 873.2)

Volume	Invert	Avail.Storage	Storage Description
#1	932.00'	38,575 cf	Custom Stage Data (Prismatic) Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
932.00	2,235	0	0
934.00	5,450	7,685	7,685
936.00	7,670	13,120	20,805
938.00	10,100	17,770	38,575

Device	Routing	Invert	Outlet Devices
#1	Primary	932.75'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#2	Discarded	932.00'	1.020 in/hr Exfiltration over Surface area
#3	Primary	934.35'	8.0" Vert. Orifice/Grate C= 0.600
#4	Primary	936.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	937.75'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31 3.30 3.31 3.32

Discarded OutFlow Max=0.13 cfs @ 12.78 hrs HW=934.12' (Free Discharge)

↑ **2=Exfiltration** (Exfiltration Controls 0.13 cfs)

Primary OutFlow Max=2.00 cfs @ 12.78 hrs HW=934.12' (Free Discharge)

↑ **1=Orifice/Grate** (Orifice Controls 2.00 cfs @ 5.09 fps)
 — **3=Orifice/Grate** (Controls 0.00 cfs)
 — **4=Orifice/Grate** (Controls 0.00 cfs)
 — **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 20

Pond PND1: BASIN1

Hydrograph

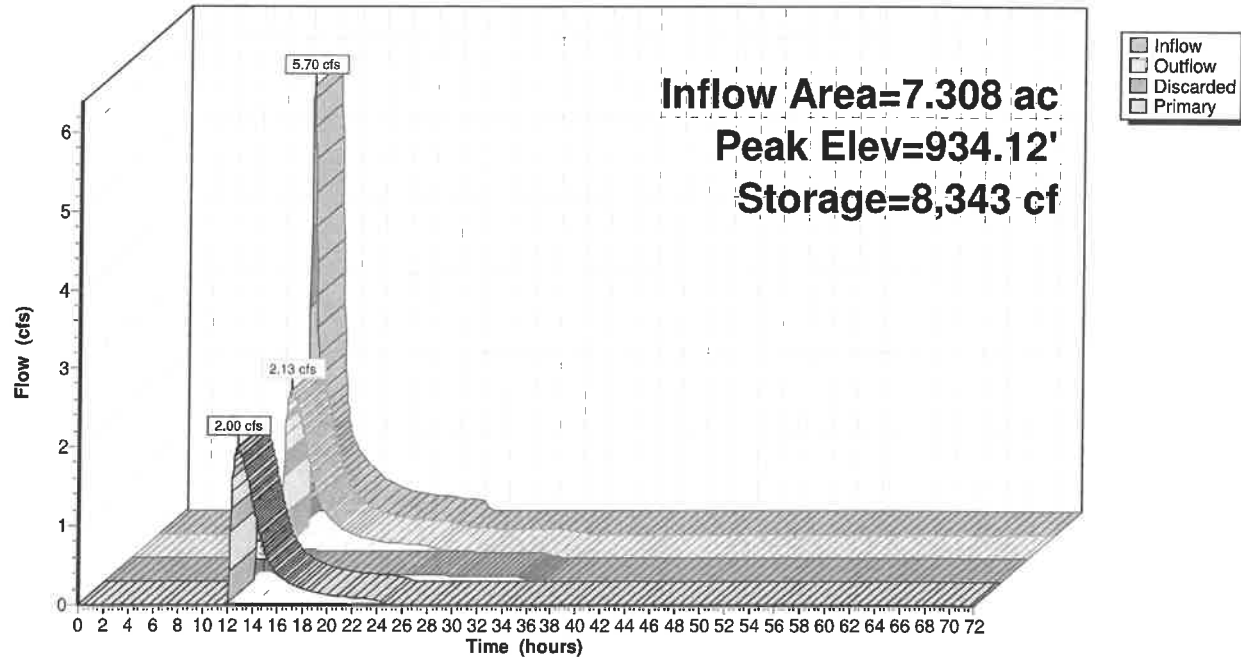

21-153 P0st Development R1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 21

Summary for Pond PND2: BASIN2

Inflow Area = 7.691 ac, 16.28% Impervious, Inflow Depth = 1.16" for 2YR event
 Inflow = 6.64 cfs @ 12.31 hrs, Volume= 0.745 af
 Outflow = 1.79 cfs @ 12.95 hrs, Volume= 0.745 af, Atten= 73%, Lag= 38.3 min
 Discarded = 0.16 cfs @ 12.95 hrs, Volume= 0.259 af
 Primary = 1.63 cfs @ 12.95 hrs, Volume= 0.485 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 924.27' @ 12.95 hrs Surf.Area= 6,926 sf Storage= 12,121 cf

Plug-Flow detention time= 210.1 min calculated for 0.744 af (100% of inflow)
 Center-of-Mass det. time= 210.6 min (1,078.3 - 867.7)

Volume	Invert	Avail.Storage	Storage Description
#1	922.00'	47,450 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
922.00	3,730	0	0
924.00	6,565	10,295	10,295
926.00	9,230	15,795	26,090
928.00	12,130	21,360	47,450

Device	Routing	Invert	Outlet Devices
#1	Discarded	922.00'	1.020 in/hr Exfiltration over Surface area
#2	Primary	923.00'	8.0" Vert. Orifice/Grate C= 0.600
#3	Primary	924.60'	12.0" Vert. Orifice/Grate C= 0.600
#4	Primary	926.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	927.40'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
			Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00
			2.50 3.00
			Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31
			3.30 3.31 3.32

Discarded OutFlow Max=0.16 cfs @ 12.95 hrs HW=924.27' (Free Discharge)

↑ **1=Exfiltration** (Exfiltration Controls 0.16 cfs)

Primary OutFlow Max=1.63 cfs @ 12.95 hrs HW=924.27' (Free Discharge)

↑ **2=Orifice/Grate** (Orifice Controls 1.63 cfs @ 4.66 fps)

↑ **3=Orifice/Grate** (Controls 0.00 cfs)

↑ **4=Orifice/Grate** (Controls 0.00 cfs)

↑ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 22

Pond PND2: BASIN2

Hydrograph

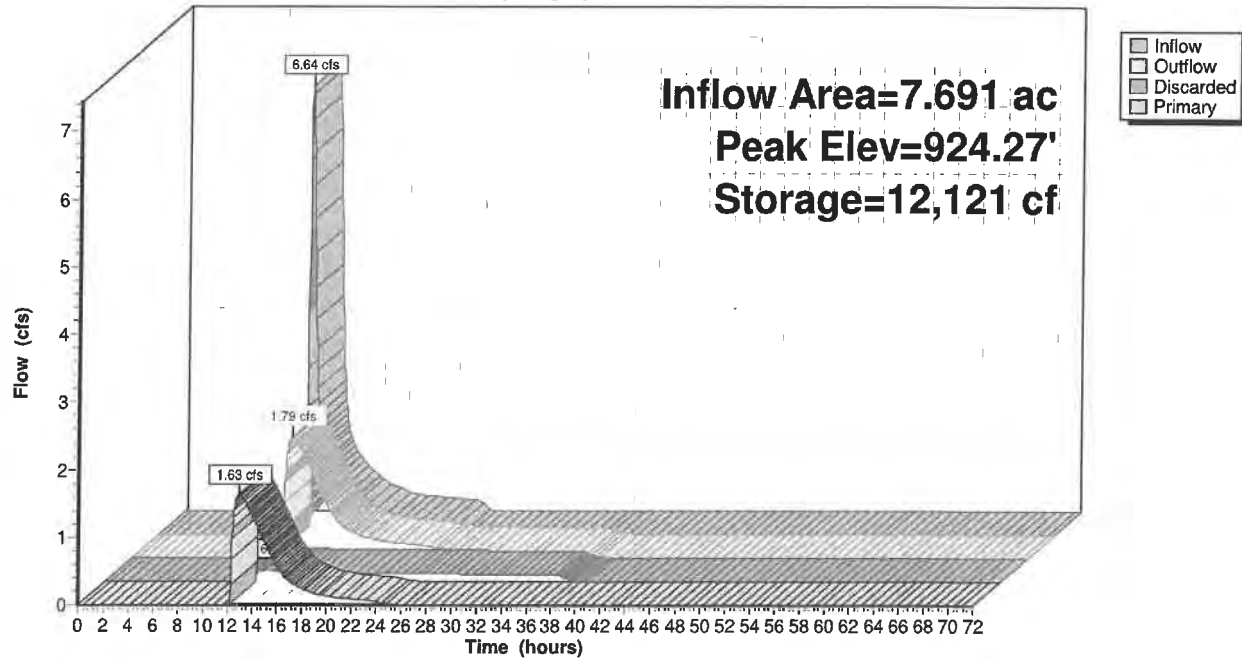

21-153 P0st Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 23

Time span=0.00-72.00 hrs, dt=0.05 hrs, 1441 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment DA-1: P-1 Runoff Area=911,170 sf 2.34% Impervious Runoff Depth=2.25"
Flow Length=1,280' Tc=32.1 min CN=74 Runoff=29.91 cfs 3.914 af

Subcatchment DA-2: P-2 Runoff Area=335,021 sf 16.28% Impervious Runoff Depth=2.50"
Flow Length=1,280' Tc=21.2 min CN=77 Runoff=14.75 cfs 1.601 af

Subcatchment DA-3: P-3 Runoff Area=325,676 sf 5.79% Impervious Runoff Depth=2.25"
Flow Length=524' Slope=0.0300 '/ Tc=17.6 min CN=74 Runoff=13.80 cfs 1.399 af

Subcatchment DA-4: P-4 Runoff Area=521,761 sf 0.00% Impervious Runoff Depth=2.16"
Flow Length=1,071' Tc=30.3 min CN=73 Runoff=16.88 cfs 2.160 af

Subcatchment DA-5: P-5 Runoff Area=318,322 sf 6.13% Impervious Runoff Depth=2.33"
Flow Length=1,184' Tc=20.1 min CN=75 Runoff=13.28 cfs 1.418 af

Subcatchment DA-6: P-6 Runoff Area=196,038 sf 3.57% Impervious Runoff Depth=2.25"
Tc=6.0 min CN=74 Runoff=11.56 cfs 0.842 af

Subcatchment DA-7: P-7 Runoff Area=125,523 sf 0.00% Impervious Runoff Depth=2.16"
Tc=6.0 min CN=73 Runoff=7.11 cfs 0.520 af

Reach 1R: POND Inflow=72.09 cfs 11.373 af
Outflow=72.09 cfs 11.373 af

Reach 2R: WETLAND Inflow=23.66 cfs 3.915 af
Outflow=23.66 cfs 3.915 af

Reach 3R: CULVERT Avg. Flow Depth=0.64' Max Vel=21.22 fps Inflow=23.66 cfs 3.915 af
36.0" Round Pipe n=0.010 L=55.0' S=0.0727 '/ Capacity=233.83 cfs Outflow=23.66 cfs 3.915 af

Pond PND1: BASIN1 Peak Elev=935.86' Storage=19,757 cf Inflow=13.28 cfs 1.418 af
Discarded=0.18 cfs 0.182 af Primary=5.02 cfs 1.236 af Outflow=5.20 cfs 1.418 af

Pond PND2: BASIN2 Peak Elev=925.85' Storage=24,713 cf Inflow=14.75 cfs 1.601 af
Discarded=0.21 cfs 0.297 af Primary=5.94 cfs 1.304 af Outflow=6.15 cfs 1.601 af

Total Runoff Area = 62.753 ac Runoff Volume = 11.852 af Average Runoff Depth = 2.27"
95.57% Pervious = 59.970 ac 4.43% Impervious = 2.783 ac

21-153 P0st Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 24

Summary for Subcatchment DA-1: P-1

Runoff = 29.91 cfs @ 12.46 hrs, Volume= 3.914 af, Depth= 2.25"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
878,323	73	Woods, Fair, HSG C
21,347	98	Paved parking, HSG C
11,500	74	>75% Grass cover, Good, HSG C
911,170	74	Weighted Average
889,823		97.66% Pervious Area
21,347		2.34% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
11.9	620	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
2.3	225	0.0100	1.61		Shallow Concentrated Flow, Travel Path C TO D
					Unpaved Kv= 16.1 fps
7.4	385	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH D TO E
					Woodland Kv= 5.0 fps
32.1	1,280	Total			

Subcatchment DA-1: P-1

Hydrograph

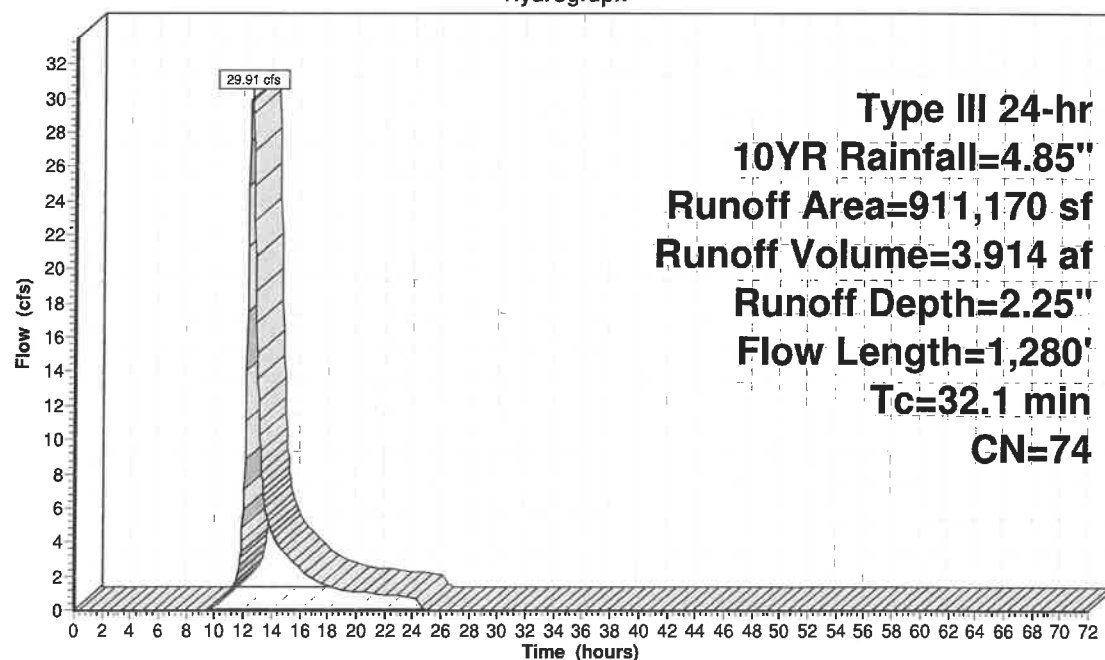

21-153 POst Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 25

Summary for Subcatchment DA-2: P-2

Runoff = 14.75 cfs @ 12.30 hrs, Volume= 1.601 af, Depth= 2.50"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
273,495	73	Woods, Fair, HSG C
54,526	98	Paved parking, HSG C
7,000	74	>75% Grass cover, Good, HSG C
335,021	77	Weighted Average
280,495		83.72% Pervious Area
54,526		16.28% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.9	530	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
2.0	350	0.0200	2.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Paved Kv= 20.3 fps
0.8	350	0.0100	7.73	13.66	Pipe Channel, TRAVEL PATH D TO E 18.0" Round Area= 1.8 sf Perim= 4.7' r= 0.38' n= 0.010 PVC, smooth interior
21.2	1,280	Total			

21-153 P-1 Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 10YR Rainfall=4.85"

Printed 2/21/2023

Page 26

Subcatchment DA-2: P-2

Hydrograph

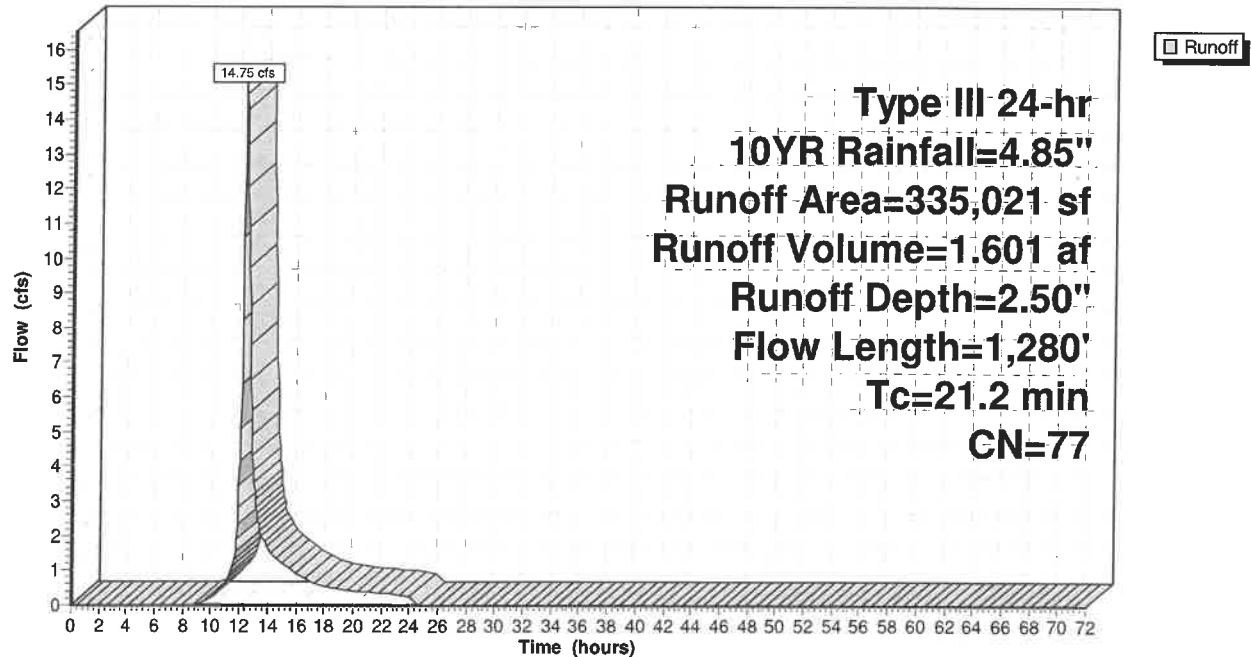

21-153 P-1 Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 27

Summary for Subcatchment DA-3: P-3

Runoff = 13.80 cfs @ 12.25 hrs, Volume= 1.399 af, Depth= 2.25"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
296,825	73	Woods, Fair, HSG C
18,851	98	Paved parking, HSG C
10,000	74	>75% Grass cover, Good, HSG C
325,676	74	Weighted Average
306,825		94.21% Pervious Area
18,851		5.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
0.9	150	0.0300	2.79		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Unpaved Kv= 16.1 fps
6.2	324	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH C TO D
					Woodland Kv= 5.0 fps
17.6	524	Total			

Subcatchment DA-3: P-3

Hydrograph

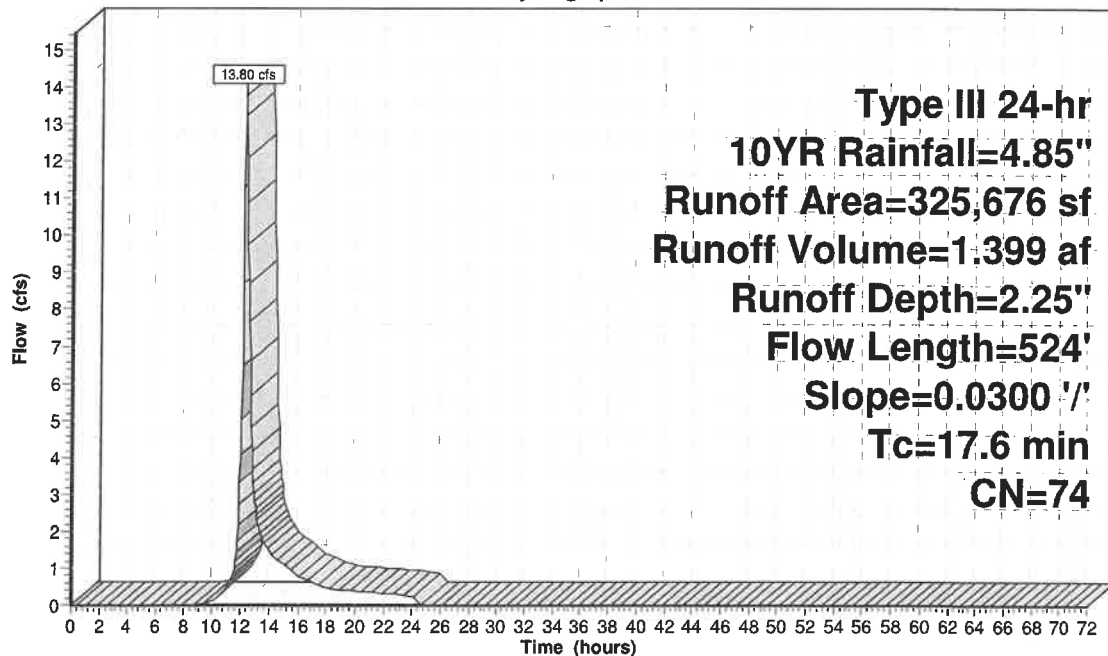

21-153 POst Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 28

Summary for Subcatchment DA-4: P-4

Runoff = 16.88 cfs @ 12.44 hrs, Volume= 2.160 af, Depth= 2.16"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
521,761	73	Woods, Fair, HSG C
521,761		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	50	0.0200	0.07		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.6	321	0.0200	0.71		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
10.4	700	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
30.3	1,071	Total			

Subcatchment DA-4: P-4

Hydrograph

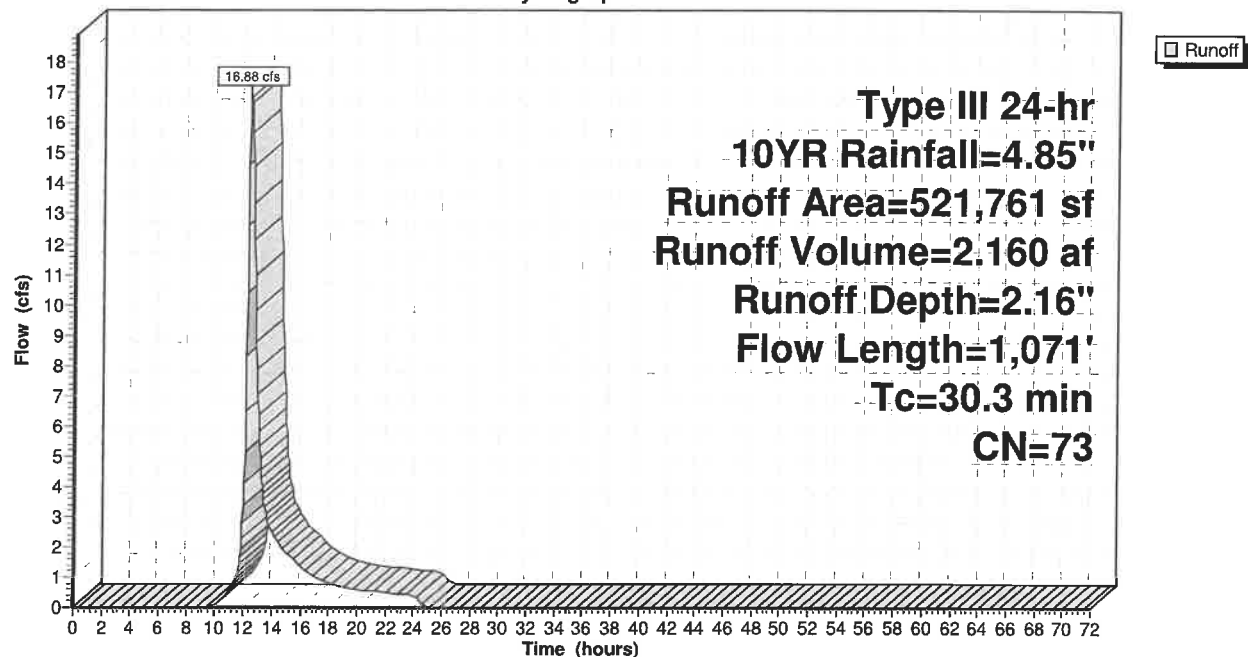

21-153 P-5 Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 29

Summary for Subcatchment DA-5: P-5

Runoff = 13.28 cfs @ 12.29 hrs, Volume= 1.418 af, Depth= 2.33"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
266,167	73	Woods, Fair, HSG C
19,500	98	Paved parking, HSG C
32,655	74	>75% Grass cover, Good, HSG C
318,322	75	Weighted Average
298,822		93.87% Pervious Area
19,500		6.13% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
8.2	50	0.0200	0.10		Sheet Flow, TRAVEL PATH A TO B Grass: Dense n= 0.240 P2= 3.20"
3.4	200	0.0200	0.99		Shallow Concentrated Flow, TRAVEL PATH B TO C Short Grass Pasture Kv= 7.0 fps
7.6	643	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
0.7	171	0.0400	4.06		Shallow Concentrated Flow, TRAVEL PATH D TO E Paved Kv= 20.3 fps
0.2	120	0.0200	9.68	11.88	Pipe Channel, TRAVEL PATH E TO F 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.010 PVC, smooth interior
20.1	1,184	Total			

21-153 P-5 Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 10YR Rainfall=4.85"

Printed 2/21/2023

Page 30

Subcatchment DA-5: P-5

Hydrograph

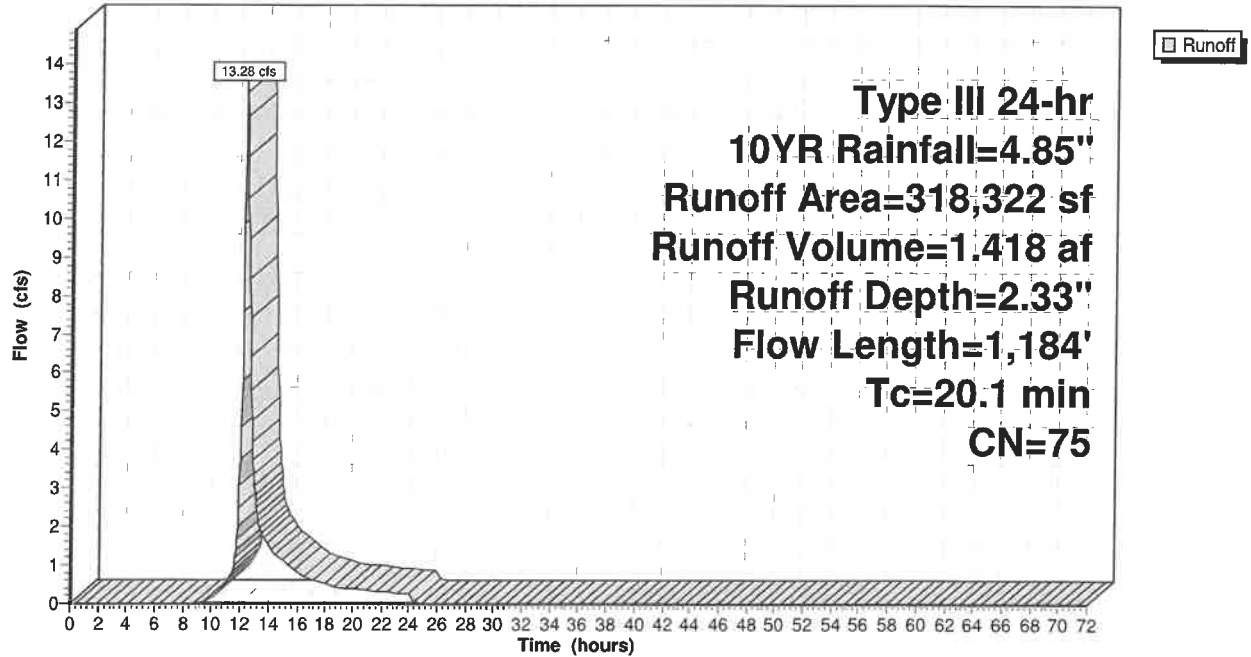

21-153 POst Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 31

Summary for Subcatchment DA-6: P-6

Runoff = 11.56 cfs @ 12.10 hrs, Volume= 0.842 af, Depth= 2.25"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
119,978	73	Woods, Fair, HSG C
69,060	74	>75% Grass cover, Good, HSG C
7,000	98	Paved parking, HSG C
196,038	74	Weighted Average
189,038		96.43% Pervious Area
7,000		3.57% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-6: P-6

Hydrograph

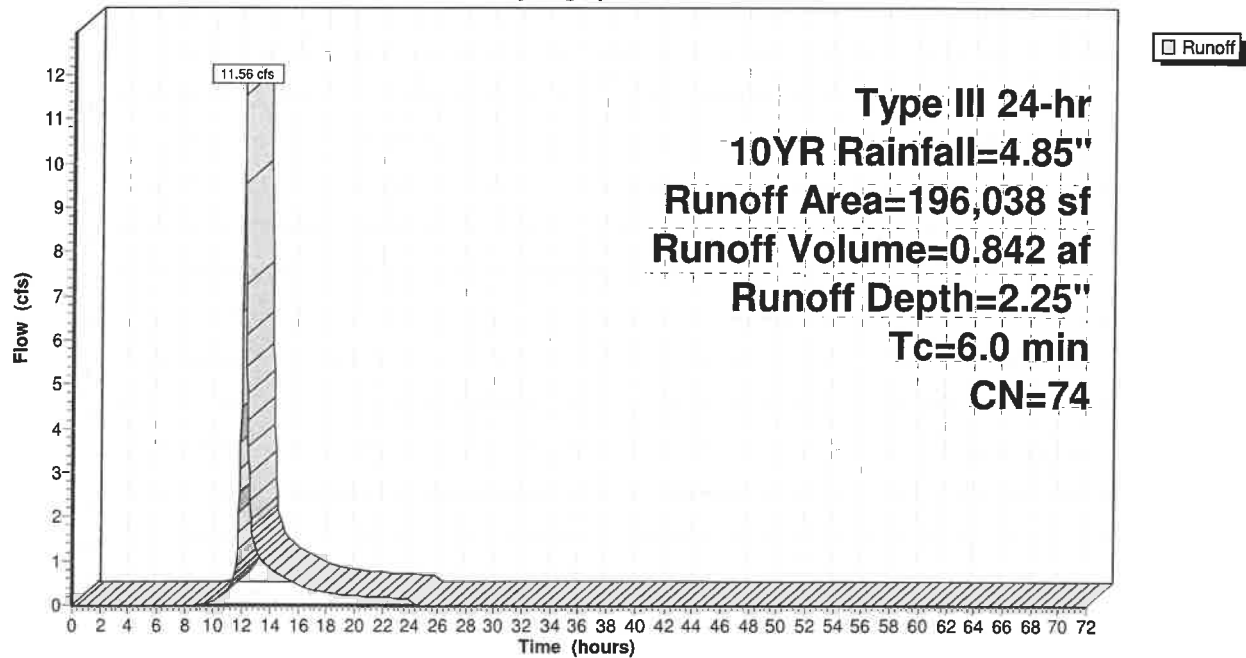

21-153 POst Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 32

Summary for Subcatchment DA-7: P-7

Runoff = 7.11 cfs @ 12.10 hrs, Volume= 0.520 af, Depth= 2.16"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
125,523	73	Woods, Fair, HSG C
125,523		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-7: P-7

Hydrograph

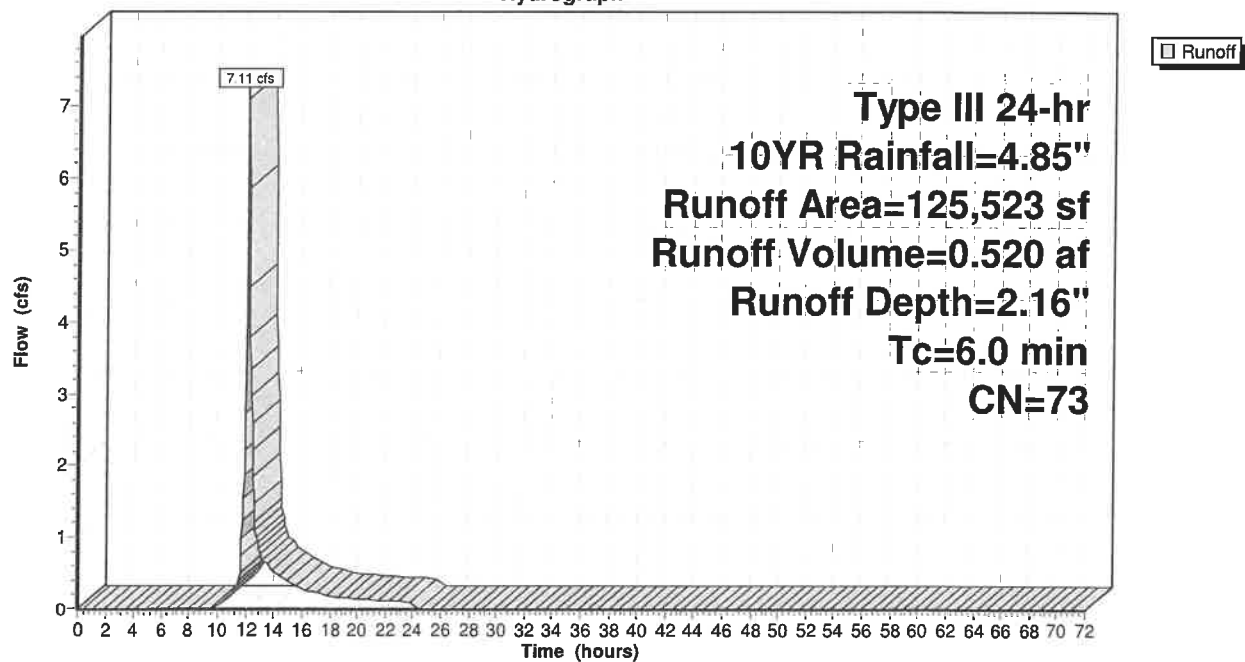

21-153 P0st Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 33


Summary for Reach 1R: POND

Inflow Area = 62.753 ac, 4.43% Impervious, Inflow Depth = 2.17" for 10YR event
Inflow = 72.09 cfs @ 12.42 hrs, Volume= 11.373 af
Outflow = 72.09 cfs @ 12.42 hrs, Volume= 11.373 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 1R: POND

Hydrograph

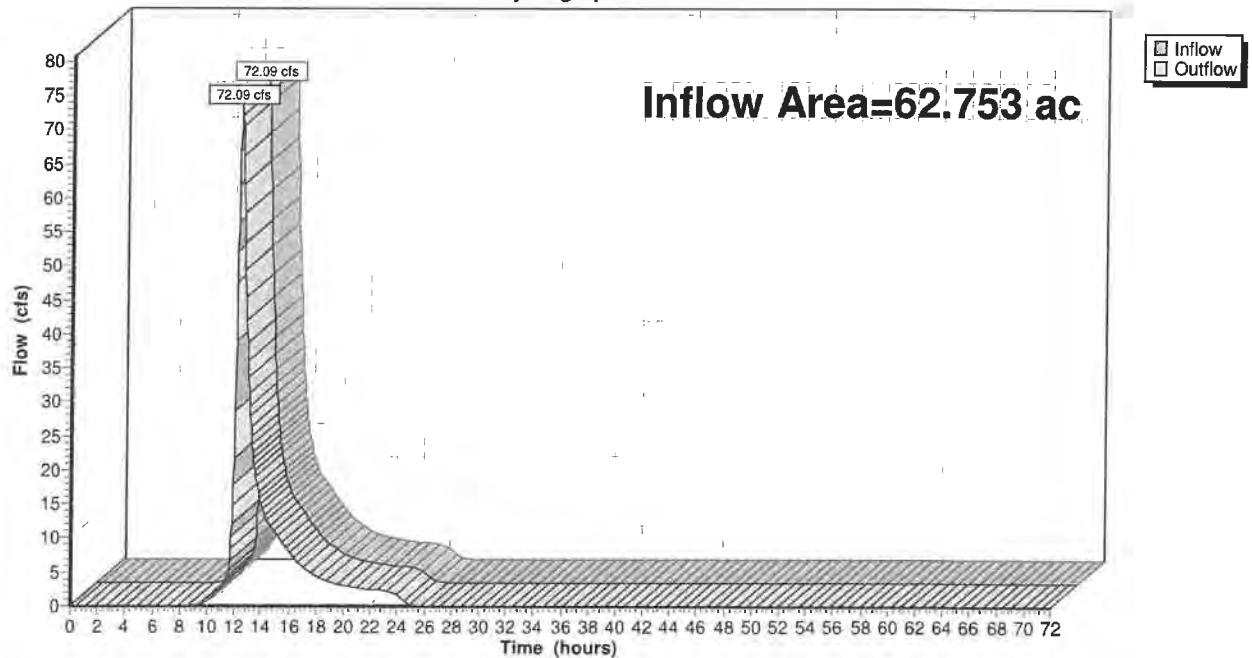

21-153 Post Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 34


Summary for Reach 2R: WETLAND

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 2.12" for 10YR event
Inflow = 23.66 cfs @ 12.43 hrs, Volume= 3.915 af
Outflow = 23.66 cfs @ 12.43 hrs, Volume= 3.915 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 2R: WETLAND

Hydrograph

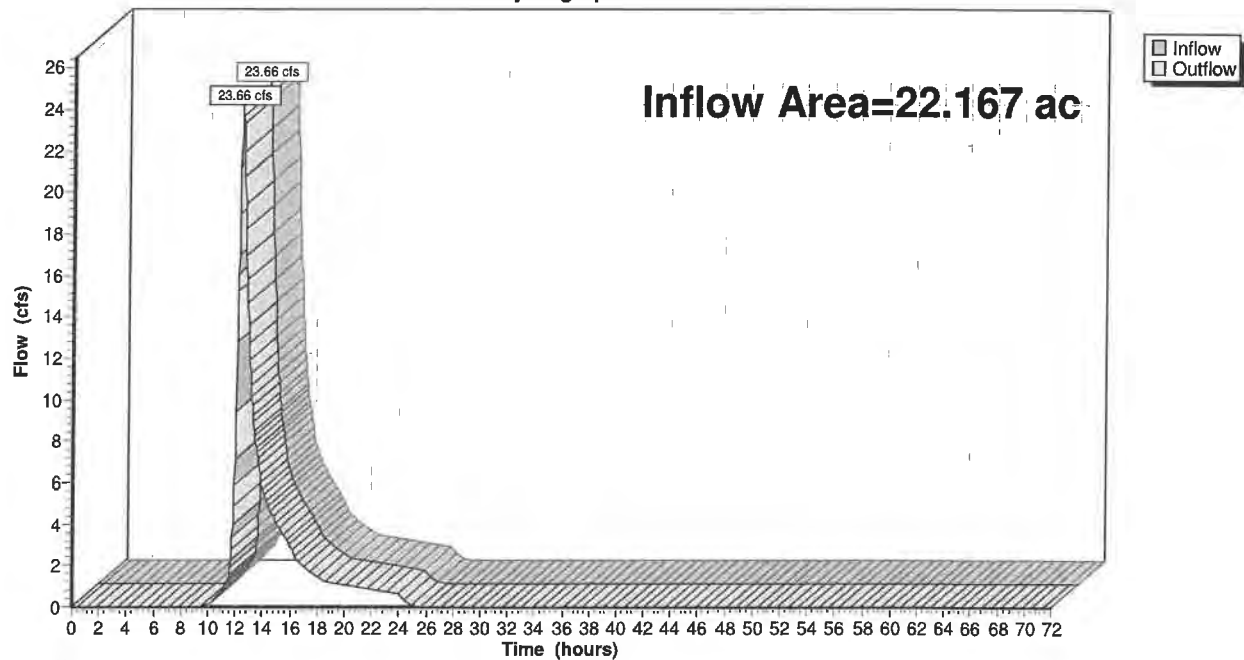

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 10YR Rainfall=4.85"

Printed 2/21/2023

Page 35

Summary for Reach 3R: CULVERT

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 2.12" for 10YR event
Inflow = 23.66 cfs @ 12.43 hrs, Volume= 3.915 af
Outflow = 23.66 cfs @ 12.43 hrs, Volume= 3.915 af, Atten= 0%, Lag= 0.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Max. Velocity= 21.22 fps, Min. Travel Time= 0.0 min
Avg. Velocity = 9.46 fps, Avg. Travel Time= 0.1 min


Peak Storage= 61 cf @ 12.43 hrs
Average Depth at Peak Storage= 0.64'
Bank-Full Depth= 3.00' Flow Area= 7.1 sf, Capacity= 233.83 cfs

36.0" Round Pipe
n= 0.010 PVC, smooth interior
Length= 55.0' Slope= 0.0727 '/'
Inlet Invert= 924.00', Outlet Invert= 920.00'



Reach 3R: CULVERT

Hydrograph

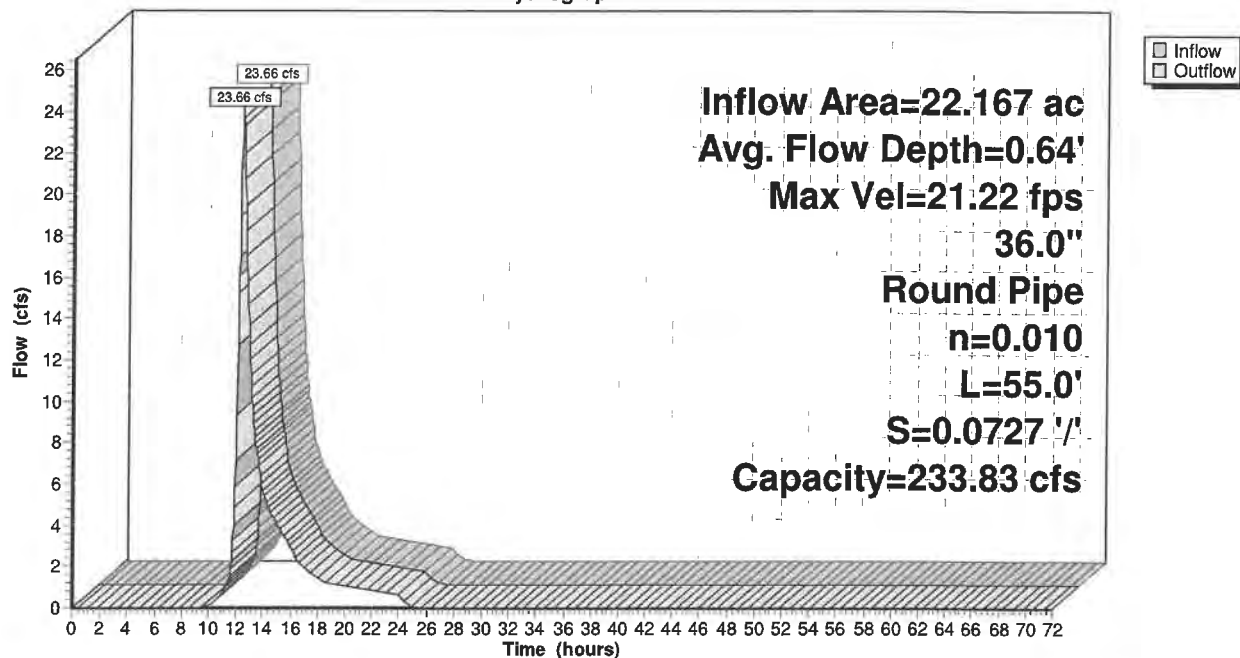

21-153 POst Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 36

Summary for Pond PND1: BASIN1

Inflow Area = 7.308 ac, 6.13% Impervious, Inflow Depth = 2.33" for 10YR event
 Inflow = 13.28 cfs @ 12.29 hrs, Volume= 1.418 af
 Outflow = 5.20 cfs @ 12.72 hrs, Volume= 1.418 af, Atten= 61%, Lag= 26.2 min
 Discarded = 0.18 cfs @ 12.72 hrs, Volume= 0.182 af
 Primary = 5.02 cfs @ 12.72 hrs, Volume= 1.236 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 935.86' @ 12.72 hrs Surf.Area= 7,517 sf Storage= 19,757 cf

Plug-Flow detention time= 83.3 min calculated for 1.417 af (100% of inflow)
 Center-of-Mass det. time= 83.6 min (933.1 - 849.4)

Volume	Invert	Avail.Storage	Storage Description
#1	932.00'	38,575 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
932.00	2,235	0	0
934.00	5,450	7,685	7,685
936.00	7,670	13,120	20,805
938.00	10,100	17,770	38,575

Device	Routing	Invert	Outlet Devices
#1	Primary	932.75'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#2	Discarded	932.00'	1.020 in/hr Exfiltration over Surface area
#3	Primary	934.35'	8.0" Vert. Orifice/Grate C= 0.600
#4	Primary	936.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	937.75'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00			
2.50 3.00			
Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31			
3.30 3.31 3.32			

Discarded OutFlow Max=0.18 cfs @ 12.72 hrs HW=935.86' (Free Discharge)

↳ **2=Exfiltration** (Exfiltration Controls 0.18 cfs)

Primary OutFlow Max=5.02 cfs @ 12.72 hrs HW=935.86' (Free Discharge)

↳ **1=Orifice/Grate** (Orifice Controls 3.20 cfs @ 8.14 fps)

↳ **3=Orifice/Grate** (Orifice Controls 1.82 cfs @ 5.22 fps)

↳ **4=Orifice/Grate** (Controls 0.00 cfs)

↳ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 10YR Rainfall=4.85"

Printed 2/21/2023

Page 37

Pond PND1: BASIN1

Hydrograph

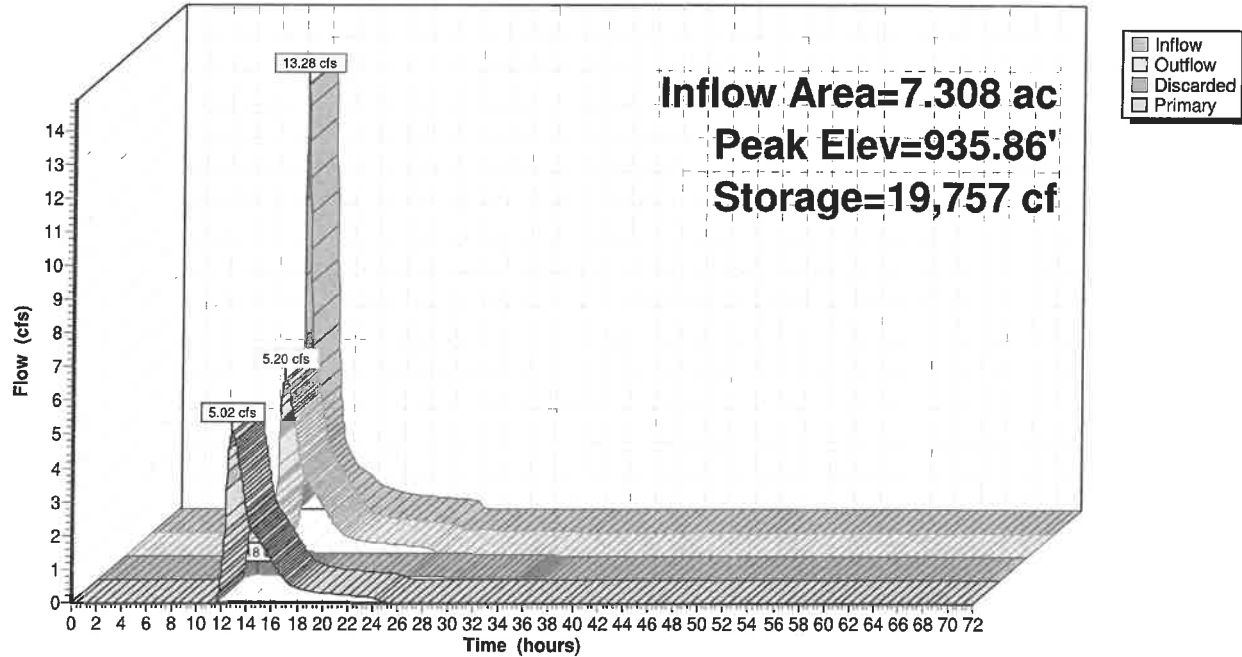

21-153 P0st Development R1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 38

Summary for Pond PND2: BASIN2

Inflow Area = 7.691 ac, 16.28% Impervious, Inflow Depth = 2.50" for 10YR event
 Inflow = 14.75 cfs @ 12.30 hrs, Volume= 1.601 af
 Outflow = 6.15 cfs @ 12.72 hrs, Volume= 1.601 af, Atten= 58%, Lag= 25.3 min
 Discarded = 0.21 cfs @ 12.72 hrs, Volume= 0.297 af
 Primary = 5.94 cfs @ 12.72 hrs, Volume= 1.304 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 925.85' @ 12.72 hrs Surf.Area= 9,029 sf Storage= 24,713 cf

Plug-Flow detention time= 139.0 min calculated for 1.601 af (100% of inflow)
 Center-of-Mass det. time= 138.7 min (983.9 - 845.2)

Volume	Invert	Avail.Storage	Storage Description
#1	922.00'	47,450 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
922.00	3,730	0	0
924.00	6,565	10,295	10,295
926.00	9,230	15,795	26,090
928.00	12,130	21,360	47,450

Device	Routing	Invert	Outlet Devices
#1	Discarded	922.00'	1.020 in/hr Exfiltration over Surface area
#2	Primary	923.00'	8.0" Vert. Orifice/Grate C= 0.600
#3	Primary	924.60'	12.0" Vert. Orifice/Grate C= 0.600
#4	Primary	926.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	927.40'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
			Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00
			2.50 3.00
			Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31
			3.30 3.31 3.32

Discarded OutFlow Max=0.21 cfs @ 12.72 hrs HW=925.85' (Free Discharge)

↑ **1=Exfiltration** (Exfiltration Controls 0.21 cfs)

Primary OutFlow Max=5.93 cfs @ 12.72 hrs HW=925.85' (Free Discharge)

↑ **2=Orifice/Grate** (Orifice Controls 2.66 cfs @ 7.63 fps)
 ↑ **3=Orifice/Grate** (Orifice Controls 3.27 cfs @ 4.16 fps)
 ↑ **4=Orifice/Grate** (Controls 0.00 cfs)
 ↑ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 10YR Rainfall=4.85"

Printed 2/21/2023

Page 39

Pond PND2: BASIN2

Hydrograph

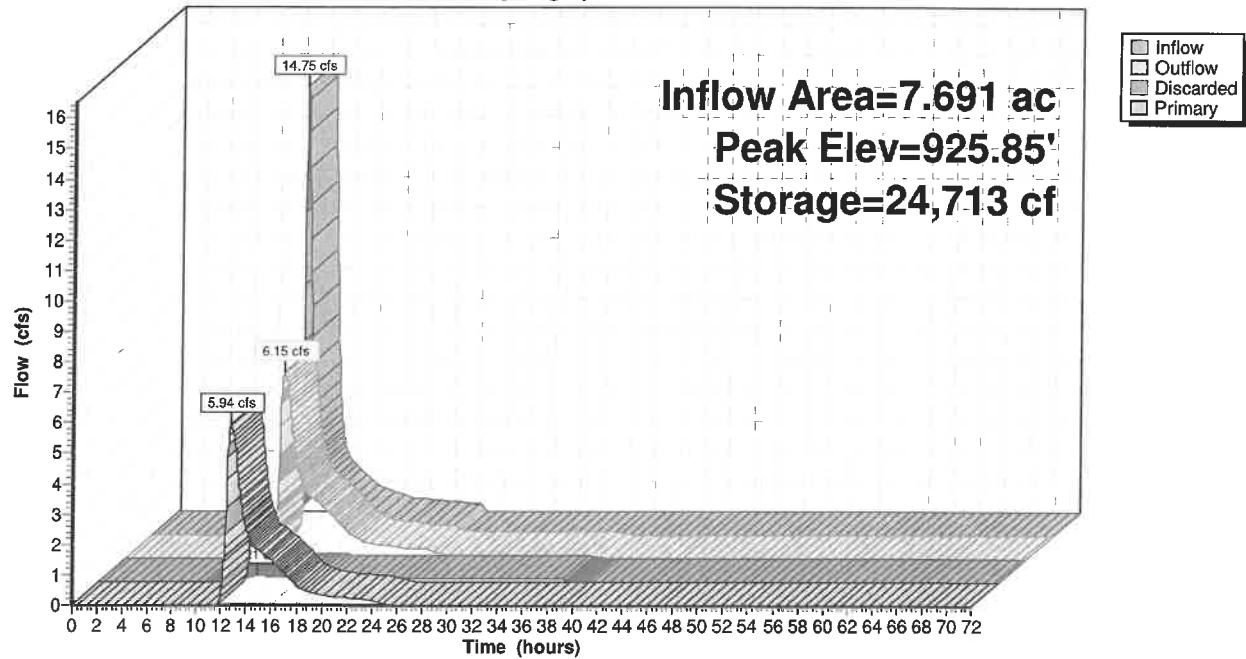

21-153 P0st Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 40

Time span=0.00-72.00 hrs, dt=0.05 hrs, 1441 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment DA-1: P-1 Runoff Area=911,170 sf 2.34% Impervious Runoff Depth=3.27"
Flow Length=1,280' Tc=32.1 min CN=74 Runoff=43.88 cfs 5.699 af

Subcatchment DA-2: P-2 Runoff Area=335,021 sf 16.28% Impervious Runoff Depth=3.57"
Flow Length=1,280' Tc=21.2 min CN=77 Runoff=21.10 cfs 2.286 af

Subcatchment DA-3: P-3 Runoff Area=325,676 sf 5.79% Impervious Runoff Depth=3.27"
Flow Length=524' Slope=0.0300 '/ Tc=17.6 min CN=74 Runoff=20.26 cfs 2.037 af

Subcatchment DA-4: P-4 Runoff Area=521,761 sf 0.00% Impervious Runoff Depth=3.17"
Flow Length=1,071' Tc=30.3 min CN=73 Runoff=24.98 cfs 3.166 af

Subcatchment DA-5: P-5 Runoff Area=318,322 sf 6.13% Impervious Runoff Depth=3.37"
Flow Length=1,184' Tc=20.1 min CN=75 Runoff=19.32 cfs 2.051 af

Subcatchment DA-6: P-6 Runoff Area=196,038 sf 3.57% Impervious Runoff Depth=3.27"
Tc=6.0 min CN=74 Runoff=16.91 cfs 1.226 af

Subcatchment DA-7: P-7 Runoff Area=125,523 sf 0.00% Impervious Runoff Depth=3.17"
Tc=6.0 min CN=73 Runoff=10.50 cfs 0.762 af

Reach 1R: POND Inflow=106.93 cfs 16.708 af
Outflow=106.93 cfs 16.708 af

Reach 2R: WETLAND Inflow=35.03 cfs 5.779 af
Outflow=35.03 cfs 5.779 af

Reach 3R: CULVERT Avg. Flow Depth=0.78' Max Vel=23.78 fps Inflow=35.03 cfs 5.779 af
36.0" Round Pipe n=0.010 L=55.0' S=0.0727 '/ Capacity=233.83 cfs Outflow=35.03 cfs 5.779 af

Pond PND1: BASIN1 Peak Elev=936.92' Storage=28,397 cf Inflow=19.32 cfs 2.051 af
Discarded=0.21 cfs 0.199 af Primary=7.81 cfs 1.851 af Outflow=8.02 cfs 2.051 af

Pond PND2: BASIN2 Peak Elev=926.79' Storage=33,782 cf Inflow=21.10 cfs 2.286 af
Discarded=0.24 cfs 0.318 af Primary=9.41 cfs 1.967 af Outflow=9.66 cfs 2.286 af

Total Runoff Area = 62.753 ac Runoff Volume = 17.226 af Average Runoff Depth = 3.29"
95.57% Pervious = 59.970 ac 4.43% Impervious = 2.783 ac

21-153 P0st Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 41

Summary for Subcatchment DA-1: P-1

Runoff = 43.88 cfs @ 12.45 hrs, Volume= 5.699 af, Depth= 3.27"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
878,323	73	Woods, Fair, HSG C
21,347	98	Paved parking, HSG C
11,500	74	>75% Grass cover, Good, HSG C
911,170	74	Weighted Average
889,823		97.66% Pervious Area
21,347		2.34% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
11.9	620	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
2.3	225	0.0100	1.61		Shallow Concentrated Flow, Travel Path C TO D
					Unpaved Kv= 16.1 fps
7.4	385	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH D TO E
					Woodland Kv= 5.0 fps
32.1	1,280	Total			

Subcatchment DA-1: P-1

Hydrograph

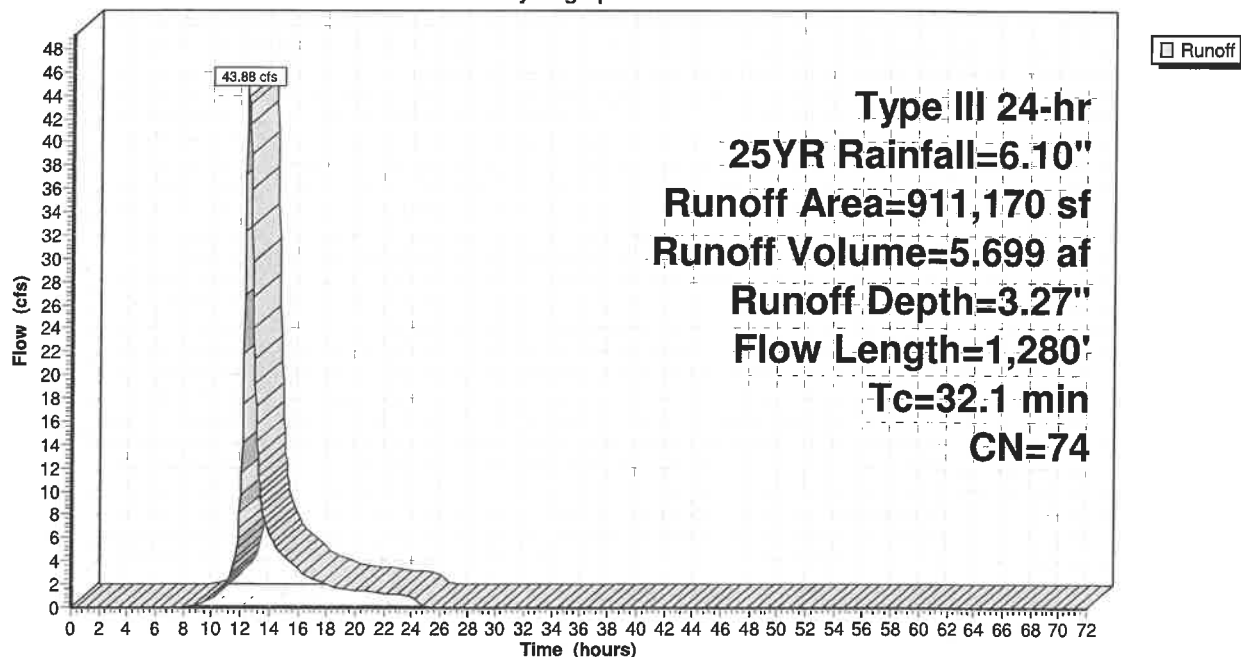

21-153 P0st Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 42

Summary for Subcatchment DA-2: P-2

Runoff = 21.10 cfs @ 12.29 hrs, Volume= 2.286 af, Depth= 3.57"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
273,495	73	Woods, Fair, HSG C
54,526	98	Paved parking, HSG C
7,000	74	>75% Grass cover, Good, HSG C
335,021	77	Weighted Average
280,495		83.72% Pervious Area
54,526		16.28% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.9	530	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
2.0	350	0.0200	2.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Paved Kv= 20.3 fps
0.8	350	0.0100	7.73	13.66	Pipe Channel, TRAVEL PATH D TO E 18.0" Round Area= 1.8 sf Perim= 4.7' r= 0.38' n= 0.010 PVC, smooth interior
21.2	1,280	Total			

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 43

Subcatchment DA-2: P-2

Hydrograph

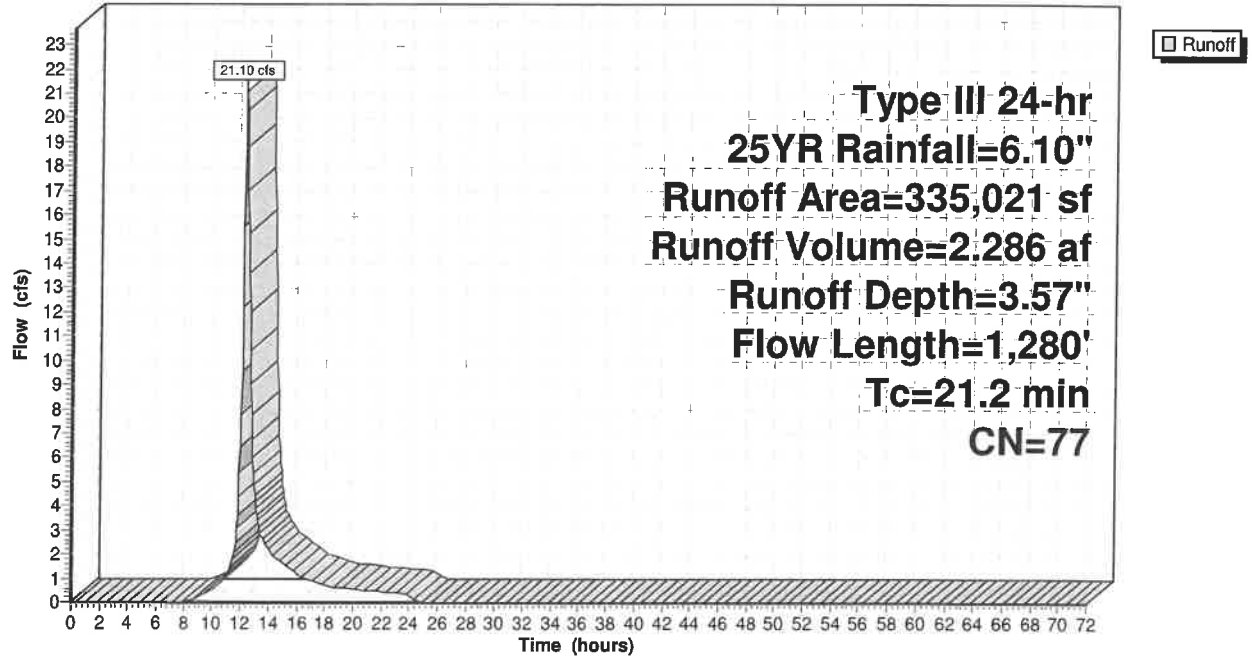

21-153 P-1 Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 44

Summary for Subcatchment DA-3: P-3

Runoff = 20.26 cfs @ 12.25 hrs, Volume= 2.037 af, Depth= 3.27"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
296,825	73	Woods, Fair, HSG C
18,851	98	Paved parking, HSG C
10,000	74	>75% Grass cover, Good, HSG C
325,676	74	Weighted Average
306,825		94.21% Pervious Area
18,851		5.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
0.9	150	0.0300	2.79		Shallow Concentrated Flow, TRAVEL PATH B TO C Unpaved Kv= 16.1 fps
6.2	324	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
17.6	524	Total			

Subcatchment DA-3: P-3

Hydrograph

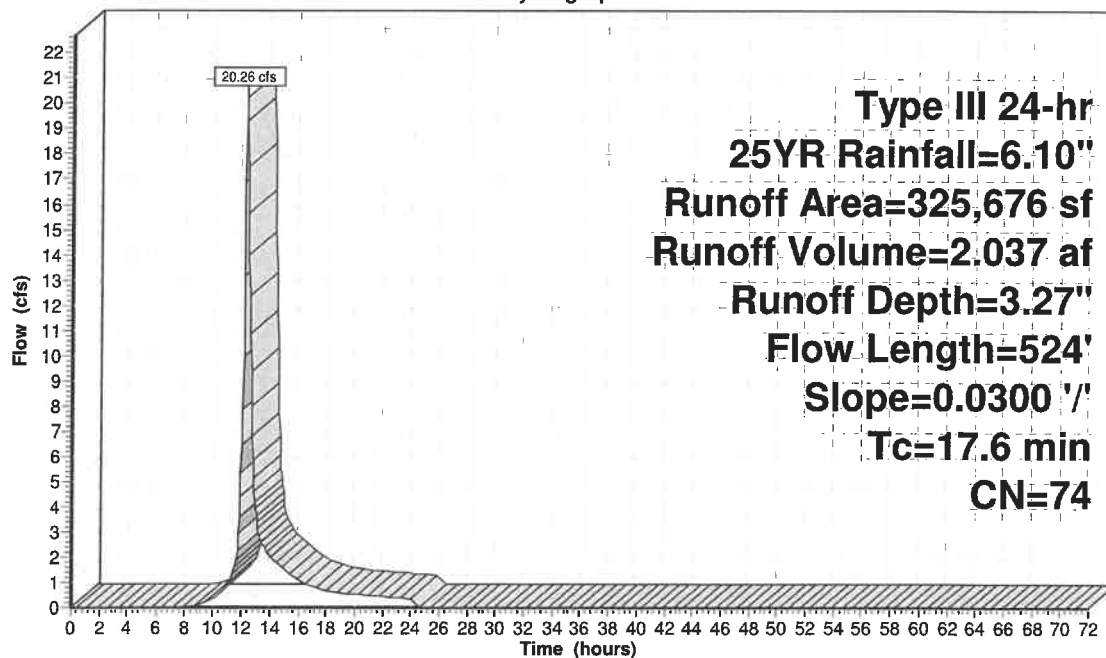

21-153 P-1 Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 45

Summary for Subcatchment DA-4: P-4

Runoff = 24.98 cfs @ 12.43 hrs, Volume= 3.166 af, Depth= 3.17"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs


Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
521,761	73	Woods, Fair, HSG C
521,761		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	50	0.0200	0.07		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.6	321	0.0200	0.71		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
10.4	700	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
30.3	1,071	Total			

Subcatchment DA-4: P-4

Hydrograph

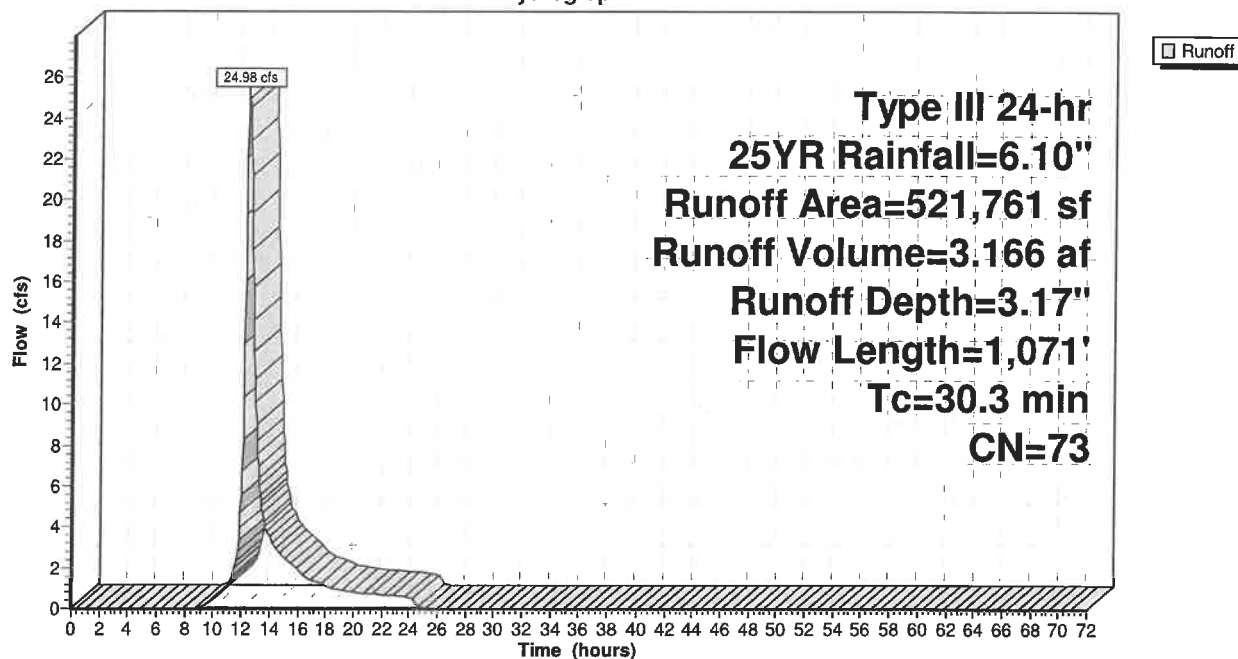

21-153 P-5 Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 46

Summary for Subcatchment DA-5: P-5

Runoff = 19.32 cfs @ 12.28 hrs, Volume= 2.051 af, Depth= 3.37"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
266,167	73	Woods, Fair, HSG C
19,500	98	Paved parking, HSG C
32,655	74	>75% Grass cover, Good, HSG C
318,322	75	Weighted Average
298,822		93.87% Pervious Area
19,500		6.13% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
8.2	50	0.0200	0.10		Sheet Flow, TRAVEL PATH A TO B Grass: Dense n= 0.240 P2= 3.20"
3.4	200	0.0200	0.99		Shallow Concentrated Flow, TRAVEL PATH B TO C Short Grass Pasture Kv= 7.0 fps
7.6	643	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
0.7	171	0.0400	4.06		Shallow Concentrated Flow, TRAVEL PATH D TO E Paved Kv= 20.3 fps
0.2	120	0.0200	9.68	11.88	Pipe Channel, TRAVEL PATH E TO F 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.010 PVC, smooth interior
20.1	1,184	Total			

21-153 P-05 Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 47

Subcatchment DA-5: P-5

Hydrograph

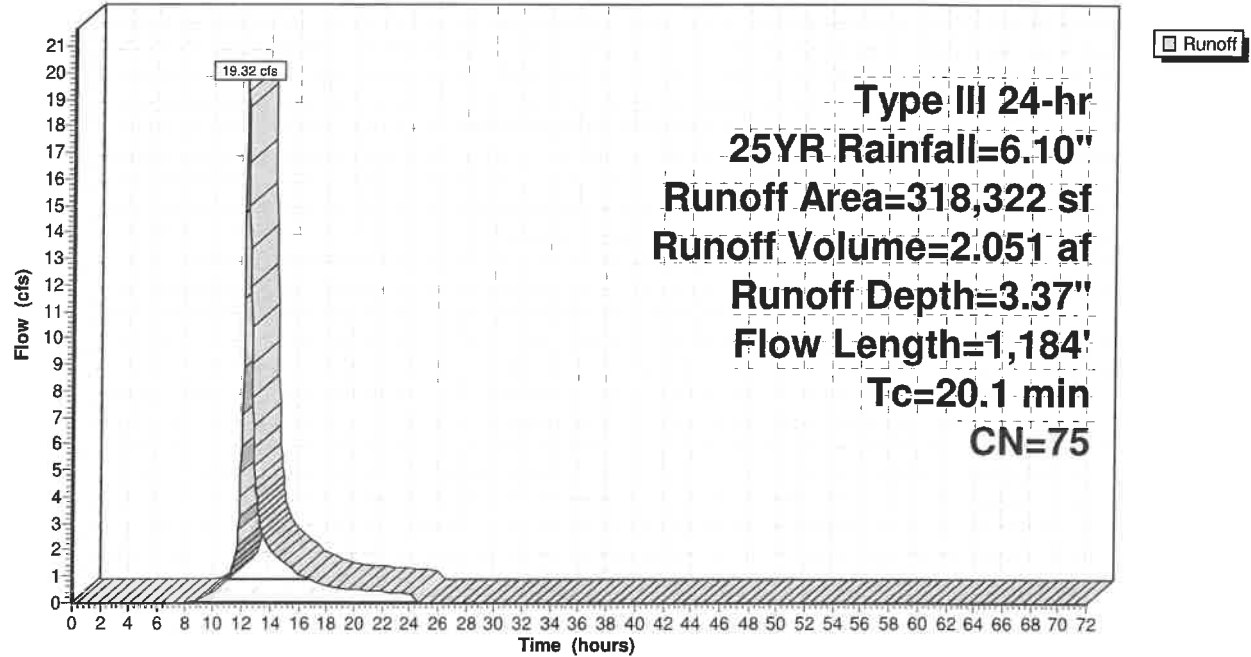

21-153 P0st Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 48

Summary for Subcatchment DA-6: P-6

Runoff = 16.91 cfs @ 12.09 hrs, Volume= 1.226 af, Depth= 3.27"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
119,978	73	Woods, Fair, HSG C
69,060	74	>75% Grass cover, Good, HSG C
7,000	98	Paved parking, HSG C
196,038	74	Weighted Average
189,038		96.43% Pervious Area
7,000		3.57% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-6: P-6

Hydrograph

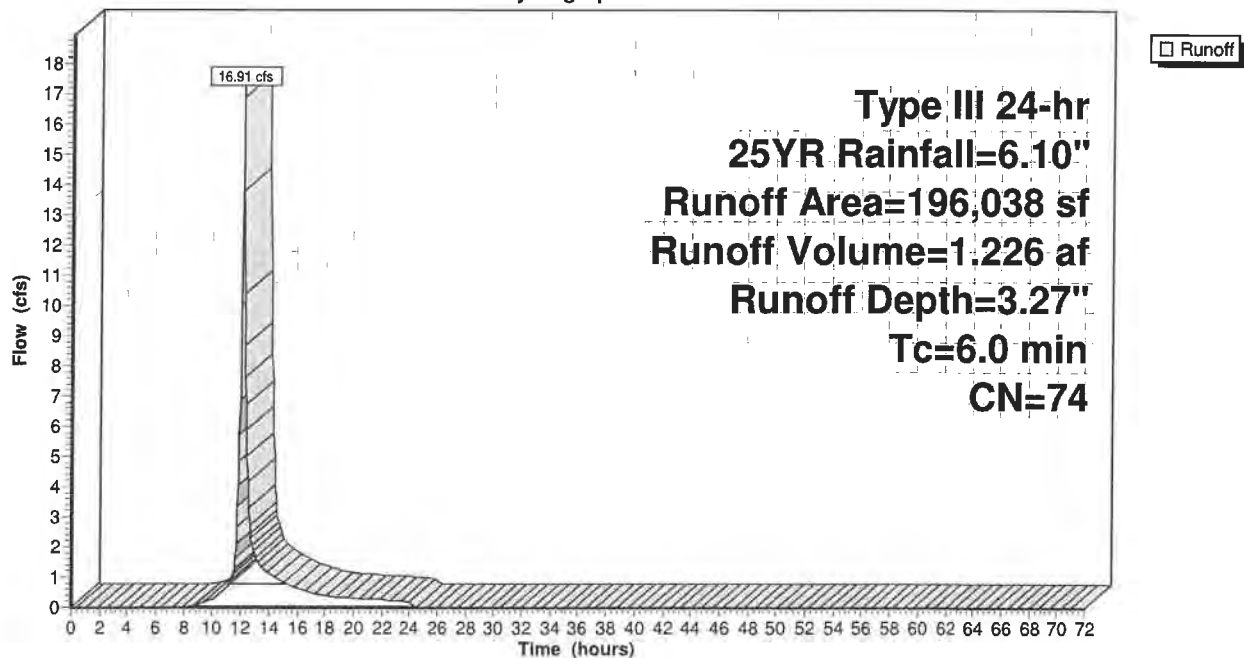

21-153 P0st Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 49

Summary for Subcatchment DA-7: P-7

Runoff = 10.50 cfs @ 12.09 hrs, Volume= 0.762 af, Depth= 3.17"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
125,523	73	Woods, Fair, HSG C
125,523		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-7: P-7

Hydrograph

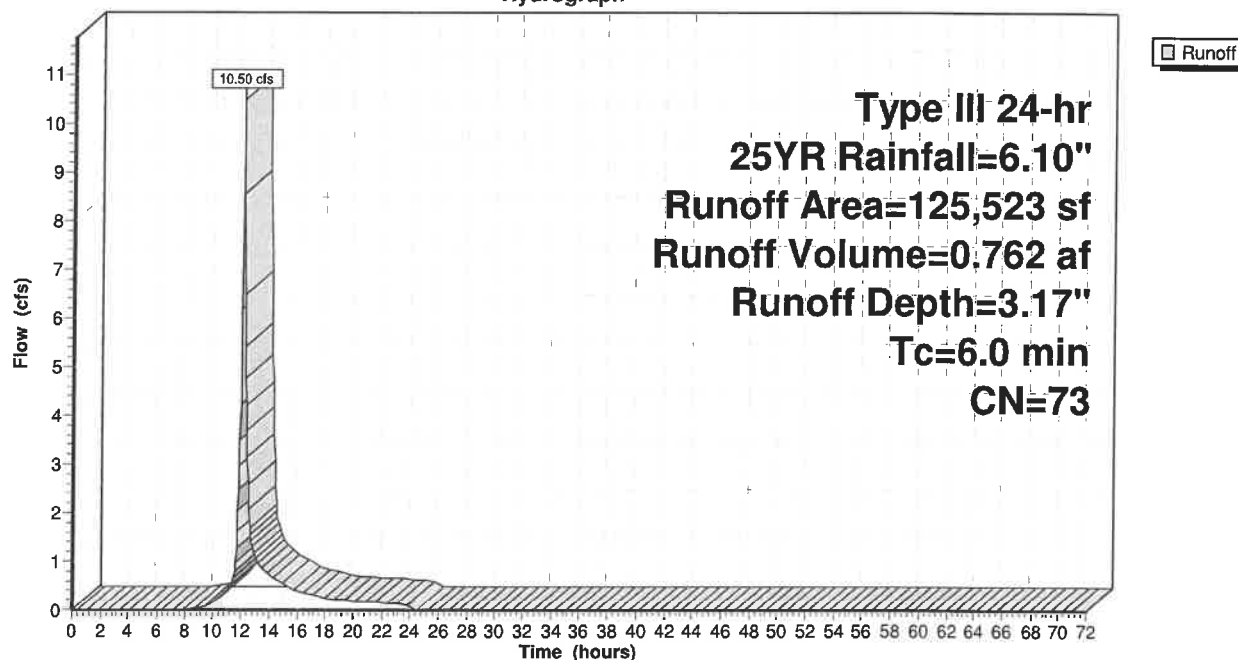

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 50


Summary for Reach 1R: POND

Inflow Area = 62.753 ac, 4.43% Impervious, Inflow Depth = 3.19" for 25YR event
Inflow = 106.93 cfs @ 12.41 hrs, Volume= 16.708 af
Outflow = 106.93 cfs @ 12.41 hrs, Volume= 16.708 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 1R: POND

Hydrograph

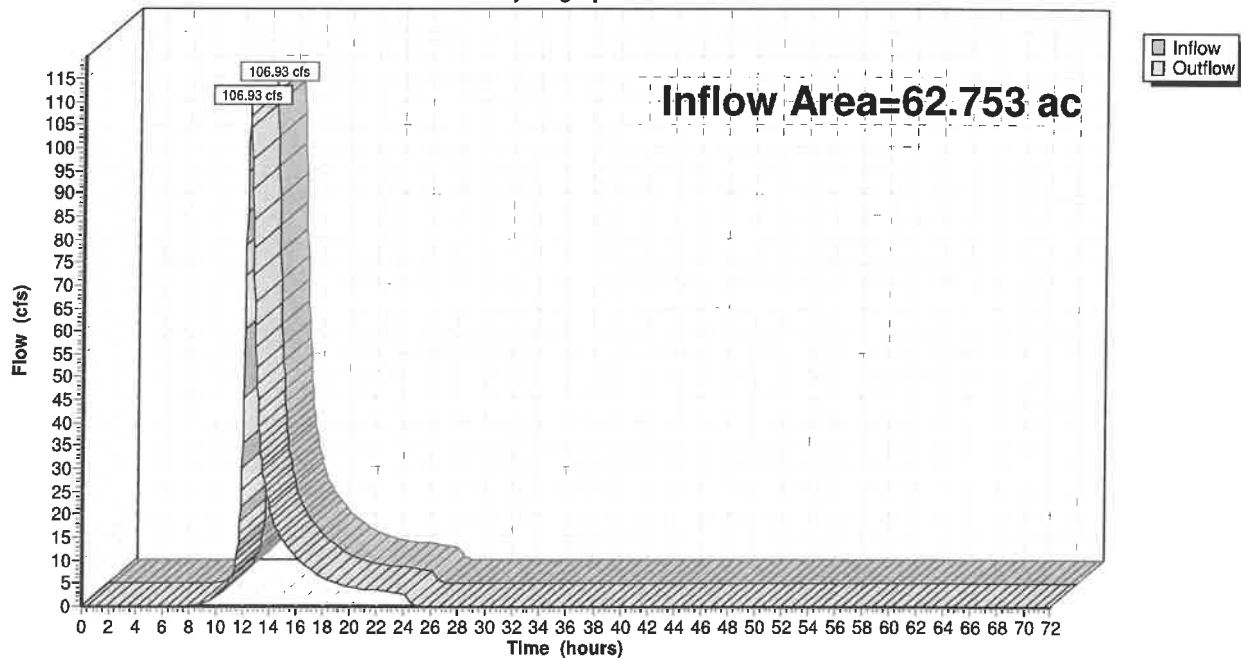

21-153 POst Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 51


Summary for Reach 2R: WETLAND

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 3.13" for 25YR event
Inflow = 35.03 cfs @ 12.43 hrs, Volume= 5.779 af
Outflow = 35.03 cfs @ 12.43 hrs, Volume= 5.779 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 2R: WETLAND

Hydrograph

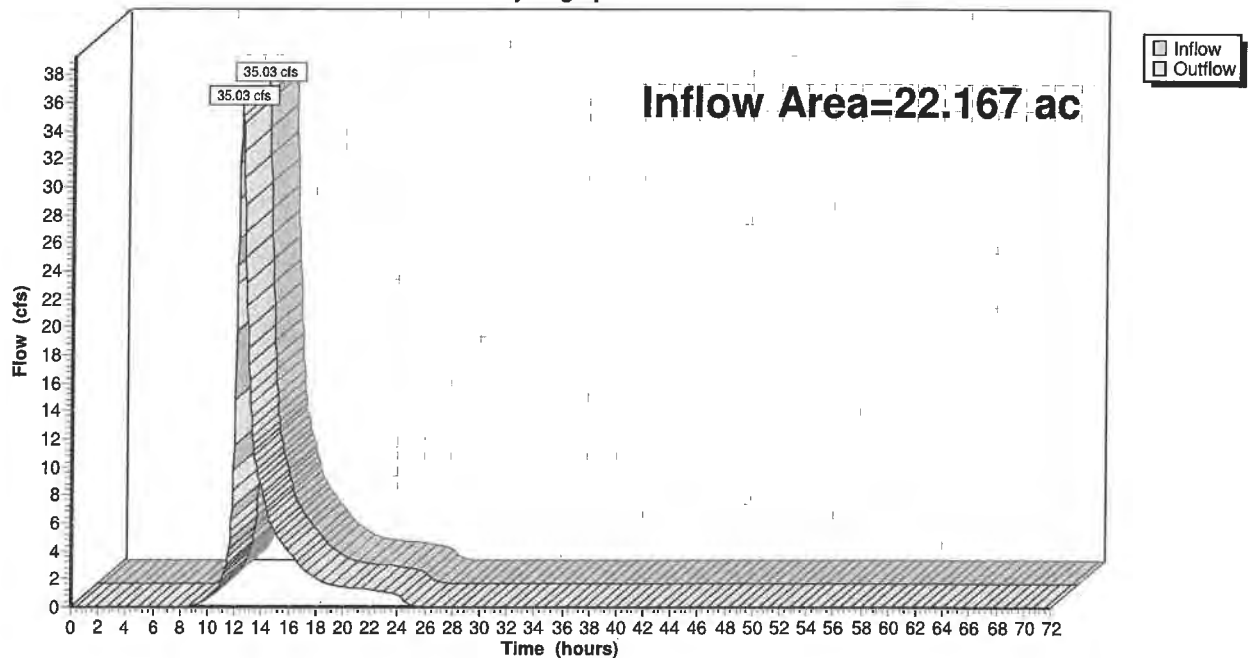

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 52

Summary for Reach 3R: CULVERT

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 3.13" for 25YR event
Inflow = 35.03 cfs @ 12.43 hrs, Volume= 5.779 af
Outflow = 35.03 cfs @ 12.43 hrs, Volume= 5.779 af, Atten= 0%, Lag= 0.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Max. Velocity= 23.78 fps, Min. Travel Time= 0.0 min

Avg. Velocity = 10.34 fps, Avg. Travel Time= 0.1 min

Peak Storage= 81 cf @ 12.43 hrs

Average Depth at Peak Storage= 0.78'

Bank-Full Depth= 3.00' Flow Area= 7.1 sf, Capacity= 233.83 cfs

36.0" Round Pipe

n= 0.010 PVC, smooth interior


Length= 55.0' Slope= 0.0727 '/'

Inlet Invert= 924.00', Outlet Invert= 920.00'



Reach 3R: CULVERT

Hydrograph

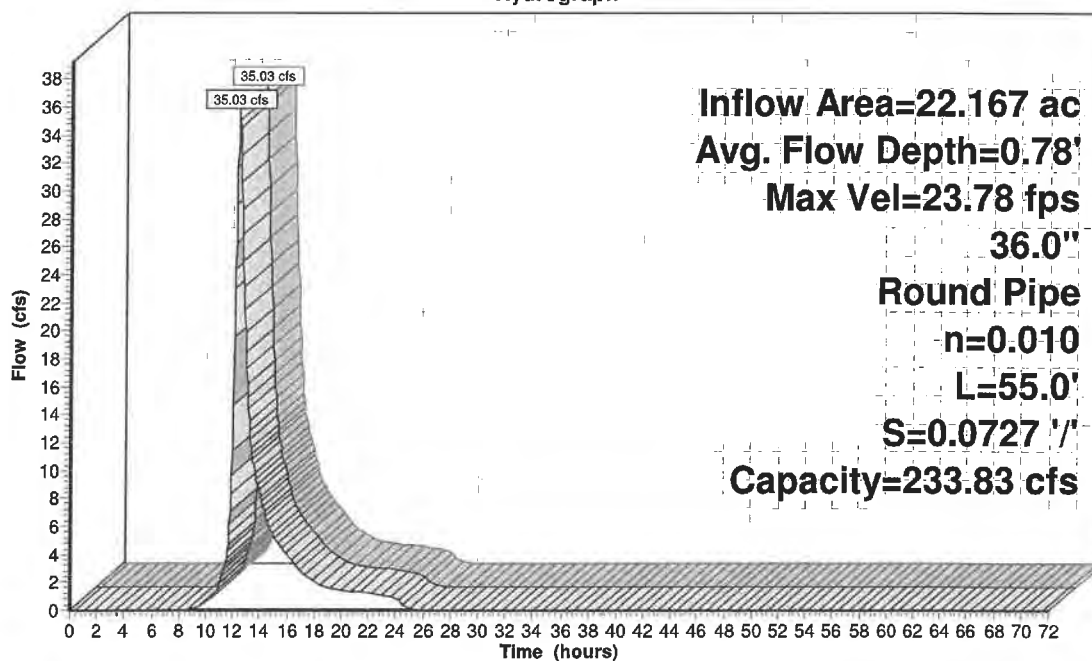

21-153 POst Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 53

Summary for Pond PND1: BASIN1

Inflow Area = 7.308 ac, 6.13% Impervious, Inflow Depth = 3.37" for 25YR event
 Inflow = 19.32 cfs @ 12.28 hrs, Volume= 2.051 af
 Outflow = 8.02 cfs @ 12.69 hrs, Volume= 2.051 af, Atten= 59%, Lag= 24.7 min
 Discarded = 0.21 cfs @ 12.69 hrs, Volume= 0.199 af
 Primary = 7.81 cfs @ 12.69 hrs, Volume= 1.851 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 936.92' @ 12.69 hrs Surf.Area= 8,791 sf Storage= 28,397 cf

Plug-Flow detention time= 74.8 min calculated for 2.049 af (100% of inflow)
 Center-of-Mass det. time= 75.2 min (914.0 - 838.8)

Volume	Invert	Avail.Storage	Storage Description
#1	932.00'	38,575 cf	Custom Stage Data (Prismatic) Listed below (Recalc)
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
932.00	2,235	0	0
934.00	5,450	7,685	7,685
936.00	7,670	13,120	20,805
938.00	10,100	17,770	38,575

Device	Routing	Invert	Outlet Devices
#1	Primary	932.75'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#2	Discarded	932.00'	1.020 in/hr Exfiltration over Surface area
#3	Primary	934.35'	8.0" Vert. Orifice/Grate C= 0.600
#4	Primary	936.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	937.75'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
			Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00
			2.50 3.00
			Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31
			3.30 3.31 3.32

Discarded OutFlow Max=0.21 cfs @ 12.69 hrs HW=936.92' (Free Discharge)

↳ **2=Exfiltration** (Exfiltration Controls 0.21 cfs)

Primary OutFlow Max=7.81 cfs @ 12.69 hrs HW=936.92' (Free Discharge)

↳ **1=Orifice/Grate** (Orifice Controls 3.74 cfs @ 9.53 fps)

↳ **3=Orifice/Grate** (Orifice Controls 2.51 cfs @ 7.20 fps)

↳ **4=Orifice/Grate** (Orifice Controls 1.55 cfs @ 3.94 fps)

↳ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 54

Pond PND1: BASIN1

Hydrograph

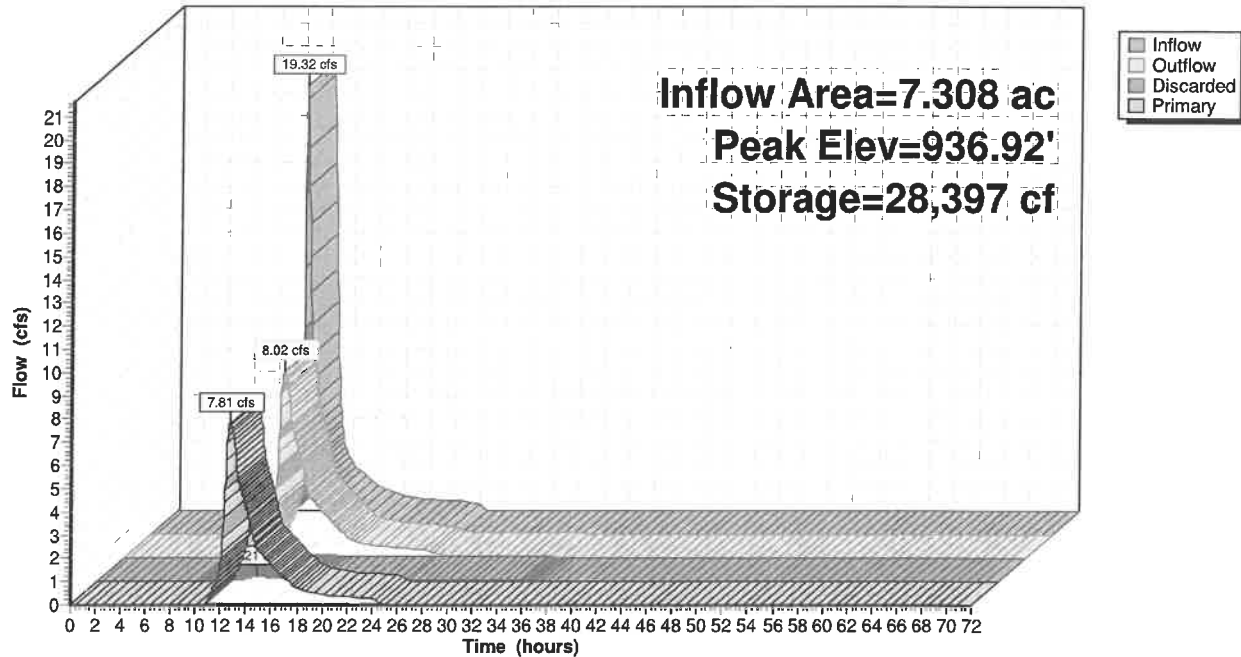

21-153 P0st Development R1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 55

Summary for Pond PND2: BASIN2

Inflow Area = 7.691 ac, 16.28% Impervious, Inflow Depth = 3.57" for 25YR event
 Inflow = 21.10 cfs @ 12.29 hrs, Volume= 2.286 af
 Outflow = 9.66 cfs @ 12.68 hrs, Volume= 2.286 af, Atten= 54%, Lag= 23.0 min
 Discarded = 0.24 cfs @ 12.68 hrs, Volume= 0.318 af
 Primary = 9.41 cfs @ 12.68 hrs, Volume= 1.967 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 926.79' @ 12.68 hrs Surf.Area= 10,368 sf Storage= 33,782 cf

Plug-Flow detention time= 115.3 min calculated for 2.284 af (100% of inflow)
 Center-of-Mass det. time= 115.8 min (950.8 - 835.0)

Volume	Invert	Avail.Storage	Storage Description
#1	922.00'	47,450 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
922.00	3,730	0	0
924.00	6,565	10,295	10,295
926.00	9,230	15,795	26,090
928.00	12,130	21,360	47,450

Device	Routing	Invert	Outlet Devices
#1	Discarded	922.00'	1.020 in/hr Exfiltration over Surface area
#2	Primary	923.00'	8.0" Vert. Orifice/Grate C= 0.600
#3	Primary	924.60'	12.0" Vert. Orifice/Grate C= 0.600
#4	Primary	926.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	927.40'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
			Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00
			2.50 3.00
			Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31
			3.30 3.31 3.32

Discarded OutFlow Max=0.24 cfs @ 12.68 hrs HW=926.78' (Free Discharge)

↑ **1=Exfiltration** (Exfiltration Controls 0.24 cfs)

Primary OutFlow Max=9.41 cfs @ 12.68 hrs HW=926.78' (Free Discharge)

↑ **2=Orifice/Grate** (Orifice Controls 3.12 cfs @ 8.94 fps)
 ↑ **3=Orifice/Grate** (Orifice Controls 4.90 cfs @ 6.25 fps)
 ↑ **4=Orifice/Grate** (Orifice Controls 1.38 cfs @ 3.51 fps)
 ↑ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 56

Pond PND2: BASIN2

Hydrograph

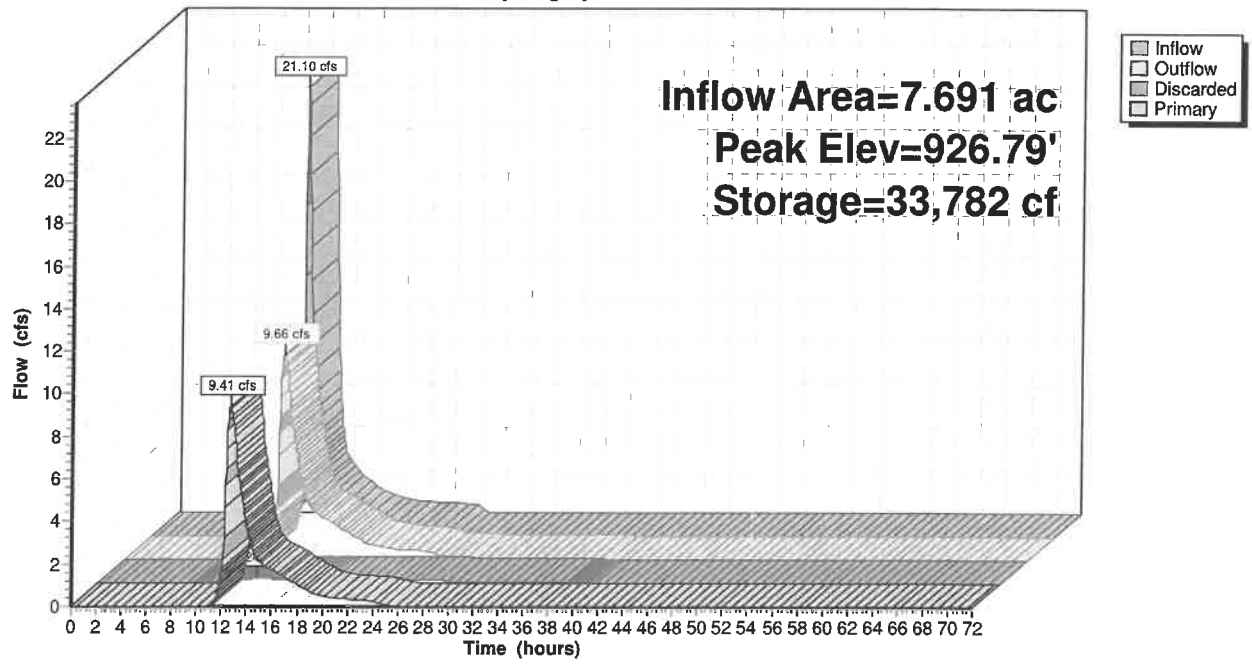

21-153 P0st Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 57

Time span=0.00-72.00 hrs, dt=0.05 hrs, 1441 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment DA-1: P-1

Runoff Area=911,170 sf 2.34% Impervious Runoff Depth=3.80"
Flow Length=1,280' Tc=32.1 min CN=74 Runoff=51.03 cfs 6.622 af

Subcatchment DA-2: P-2

Runoff Area=335,021 sf 16.28% Impervious Runoff Depth=4.12"
Flow Length=1,280' Tc=21.2 min CN=77 Runoff=24.32 cfs 2.637 af

Subcatchment DA-3: P-3

Runoff Area=325,676 sf 5.79% Impervious Runoff Depth=3.80"
Flow Length=524' Slope=0.0300 '/' Tc=17.6 min CN=74 Runoff=23.56 cfs 2.367 af

Subcatchment DA-4: P-4

Runoff Area=521,761 sf 0.00% Impervious Runoff Depth=3.70"
Flow Length=1,071' Tc=30.3 min CN=73 Runoff=29.17 cfs 3.688 af

Subcatchment DA-5: P-5

Runoff Area=318,322 sf 6.13% Impervious Runoff Depth=3.90"
Flow Length=1,184' Tc=20.1 min CN=75 Runoff=22.41 cfs 2.377 af

Subcatchment DA-6: P-6

Runoff Area=196,038 sf 3.57% Impervious Runoff Depth=3.80"
Tc=6.0 min CN=74 Runoff=19.65 cfs 1.425 af

Subcatchment DA-7: P-7

Runoff Area=125,523 sf 0.00% Impervious Runoff Depth=3.70"
Tc=6.0 min CN=73 Runoff=12.24 cfs 0.887 af

Reach 1R: POND

Inflow=125.08 cfs 19.468 af
Outflow=125.08 cfs 19.468 af

Reach 2R: WETLAND

Inflow=40.93 cfs 6.745 af
Outflow=40.93 cfs 6.745 af

Reach 3R: CULVERT

Avg. Flow Depth=0.85' Max Vel=24.86 fps Inflow=40.93 cfs 6.745 af
36.0" Round Pipe n=0.010 L=55.0' S=0.0727 '/' Capacity=233.83 cfs Outflow=40.93 cfs 6.745 af

Pond PND1: BASIN1

Peak Elev=937.43' Storage=33,004 cf Inflow=22.41 cfs 2.377 af
Discarded=0.22 cfs 0.208 af Primary=8.82 cfs 2.170 af Outflow=9.04 cfs 2.377 af

Pond PND2: BASIN2

Peak Elev=927.23' Storage=38,549 cf Inflow=24.32 cfs 2.637 af
Discarded=0.26 cfs 0.328 af Primary=10.71 cfs 2.309 af Outflow=10.97 cfs 2.637 af

Total Runoff Area = 62.753 ac Runoff Volume = 20.004 af Average Runoff Depth = 3.83"
95.57% Pervious = 59.970 ac 4.43% Impervious = 2.783 ac

21-153 P0st Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 58

Summary for Subcatchment DA-1: P-1

Runoff = 51.03 cfs @ 12.45 hrs, Volume= 6.622 af, Depth= 3.80"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
878,323	73	Woods, Fair, HSG C
21,347	98	Paved parking, HSG C
11,500	74	>75% Grass cover, Good, HSG C
911,170	74	Weighted Average
889,823		97.66% Pervious Area
21,347		2.34% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
11.9	620	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
2.3	225	0.0100	1.61		Shallow Concentrated Flow, Travel Path C TO D
					Unpaved Kv= 16.1 fps
7.4	385	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH D TO E
					Woodland Kv= 5.0 fps
32.1	1,280	Total			

Subcatchment DA-1: P-1

Hydrograph

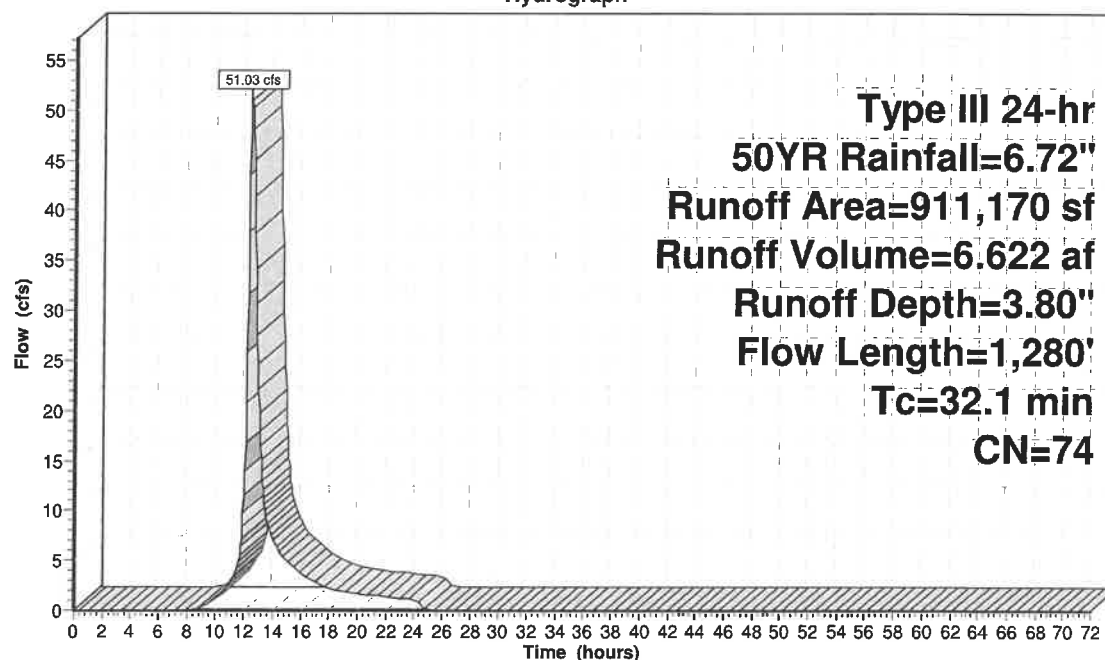

Runoff

21-153 P-2 Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 59

Summary for Subcatchment DA-2: P-2

Runoff = 24.32 cfs @ 12.29 hrs, Volume= 2.637 af, Depth= 4.12"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
273,495	73	Woods, Fair, HSG C
54,526	98	Paved parking, HSG C
7,000	74	>75% Grass cover, Good, HSG C
335,021	77	Weighted Average
280,495		83.72% Pervious Area
54,526		16.28% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.9	530	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
2.0	350	0.0200	2.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Paved Kv= 20.3 fps
0.8	350	0.0100	7.73	13.66	Pipe Channel, TRAVEL PATH D TO E 18.0" Round Area= 1.8 sf Perim= 4.7' r= 0.38' n= 0.010 PVC, smooth interior
21.2	1,280	Total			

21-153 P-1 Development R1

Prepared by {enter your company name here}


HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 60

Subcatchment DA-2: P-2

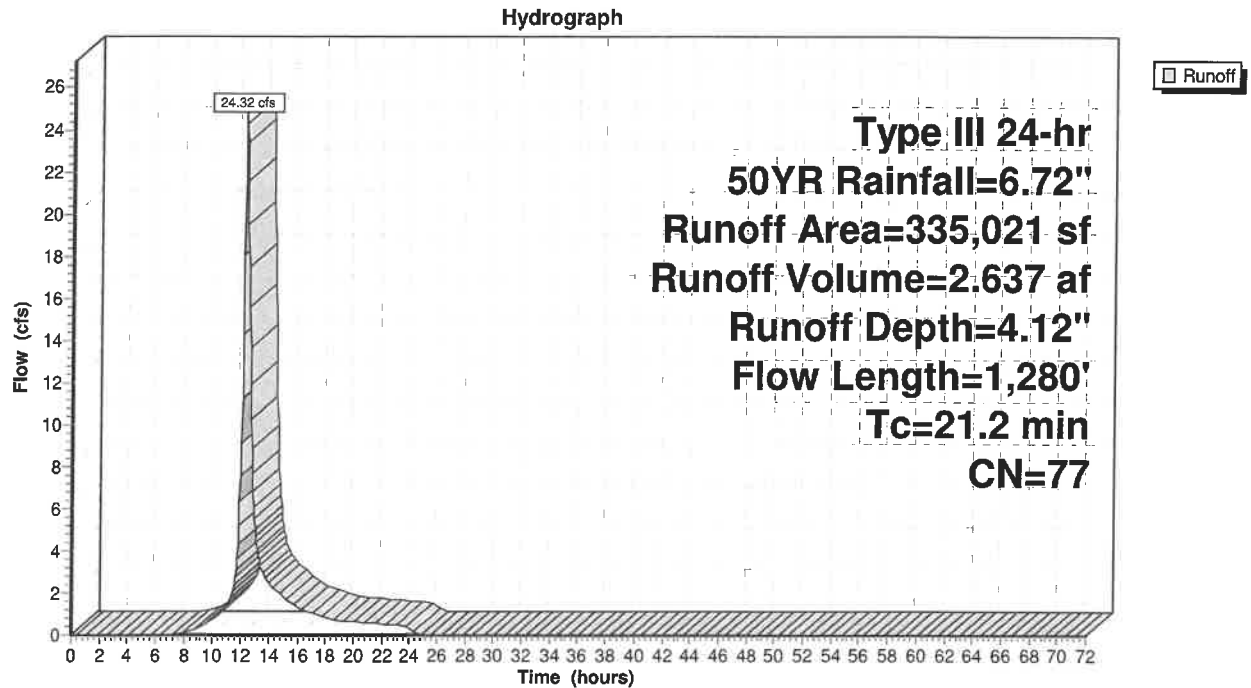

21-153 POst Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 61

Summary for Subcatchment DA-3: P-3

Runoff = 23.56 cfs @ 12.25 hrs, Volume= 2.367 af, Depth= 3.80"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
296,825	73	Woods, Fair, HSG C
18,851	98	Paved parking, HSG C
10,000	74	>75% Grass cover, Good, HSG C
325,676	74	Weighted Average
306,825		94.21% Pervious Area
18,851		5.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
0.9	150	0.0300	2.79		Shallow Concentrated Flow, TRAVEL PATH B TO C Unpaved Kv= 16.1 fps
6.2	324	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
17.6	524	Total			

Subcatchment DA-3: P-3

Hydrograph

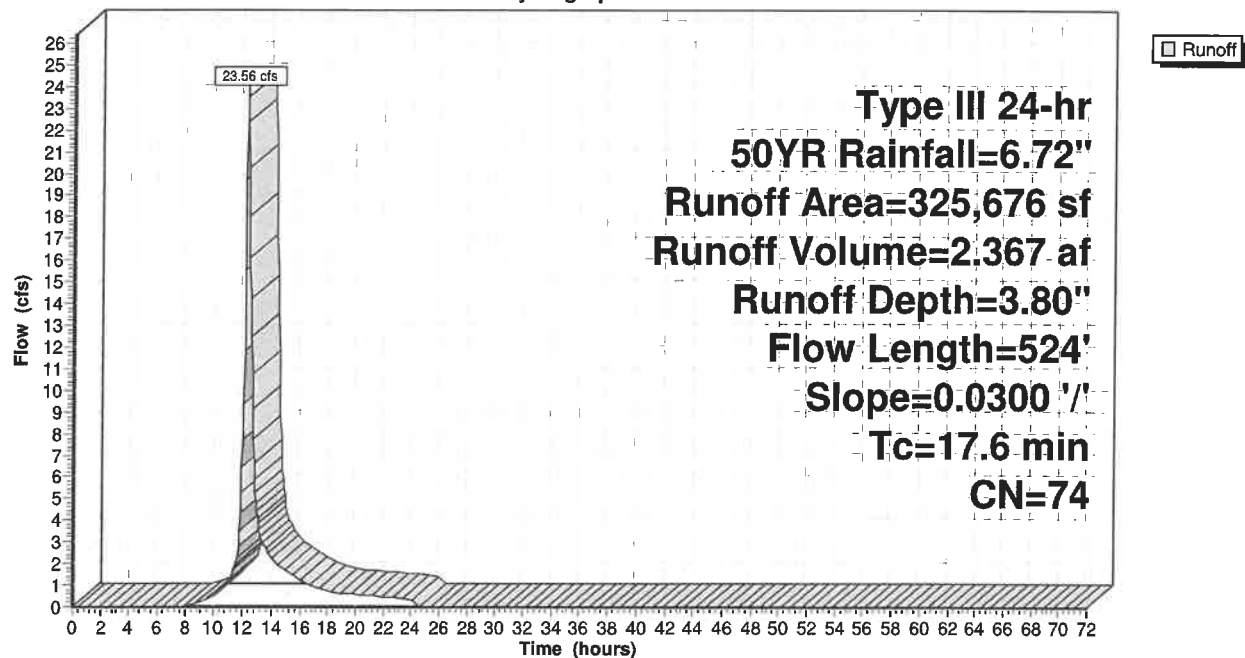

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 62

Summary for Subcatchment DA-4: P-4

Runoff = 29.17 cfs @ 12.42 hrs, Volume= 3.688 af, Depth= 3.70"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
521,761	73	Woods, Fair, HSG C
521,761		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	50	0.0200	0.07		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.6	321	0.0200	0.71		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
10.4	700	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
30.3	1,071	Total			

Subcatchment DA-4: P-4

Hydrograph

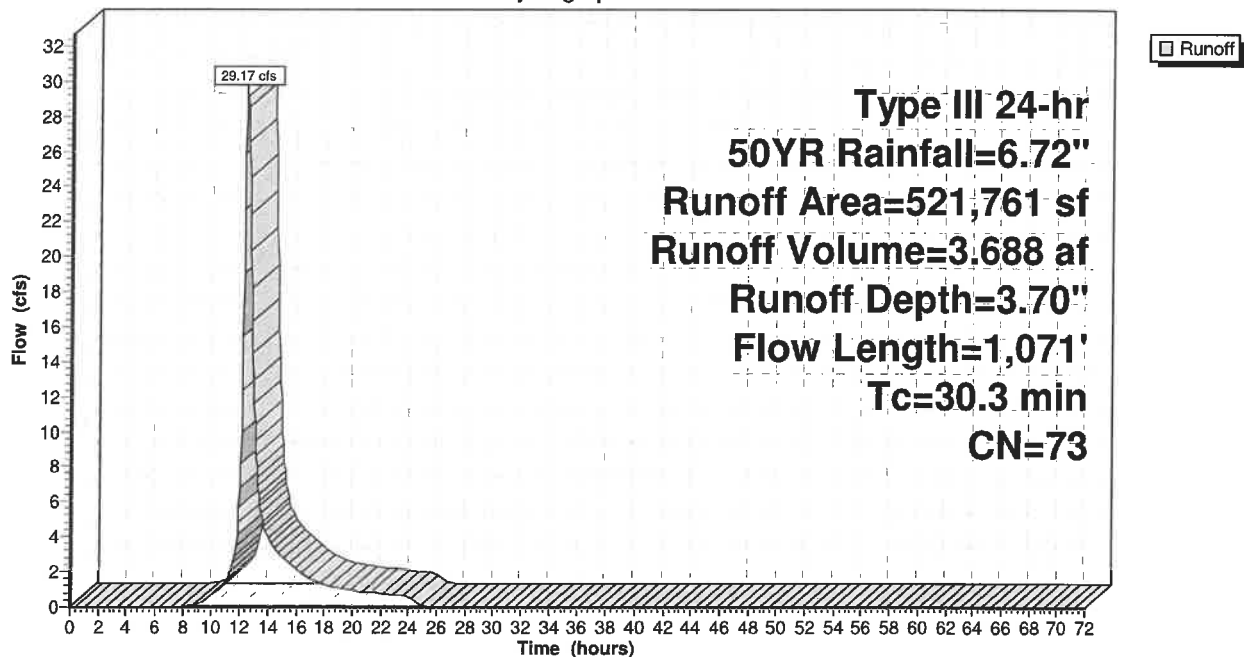

21-153 P0st Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 63

Summary for Subcatchment DA-5: P-5

Runoff = 22.41 cfs @ 12.28 hrs, Volume= 2.377 af, Depth= 3.90"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
266,167	73	Woods, Fair, HSG C
19,500	98	Paved parking, HSG C
32,655	74	>75% Grass cover, Good, HSG C
318,322	75	Weighted Average
298,822		93.87% Pervious Area
19,500		6.13% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
8.2	50	0.0200	0.10		Sheet Flow, TRAVEL PATH A TO B Grass: Dense n= 0.240 P2= 3.20"
3.4	200	0.0200	0.99		Shallow Concentrated Flow, TRAVELPATH B TO C Short Grass Pasture Kv= 7.0 fps
7.6	643	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
0.7	171	0.0400	4.06		Shallow Concentrated Flow, TRAVEL PATH D TO E Paved Kv= 20.3 fps
0.2	120	0.0200	9.68	11.88	Pipe Channel, TRAVEL PATH E TO F 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.010 PVC, smooth interior
20.1	1,184	Total			

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 64

Subcatchment DA-5: P-5

Hydrograph

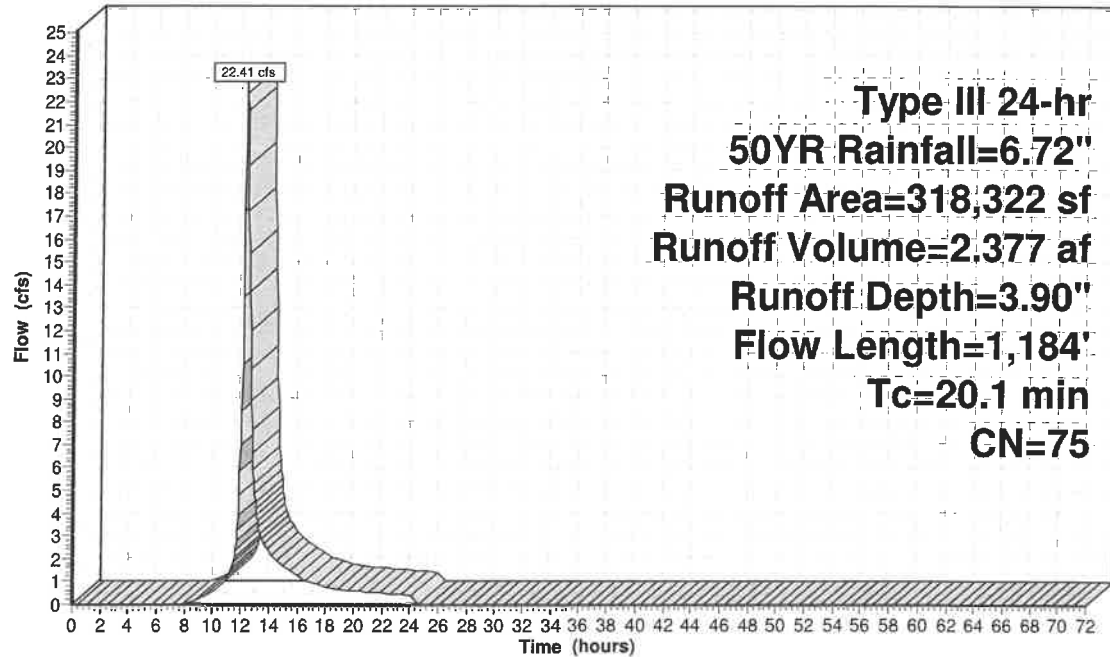

21-153 P0st Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 65

Summary for Subcatchment DA-6: P-6

Runoff = 19.65 cfs @ 12.09 hrs, Volume= 1.425 af, Depth= 3.80"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs


Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
119,978	73	Woods, Fair, HSG C
69,060	74	>75% Grass cover, Good, HSG C
7,000	98	Paved parking, HSG C
196,038	74	Weighted Average
189,038		96.43% Pervious Area
7,000		3.57% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-6: P-6

Hydrograph

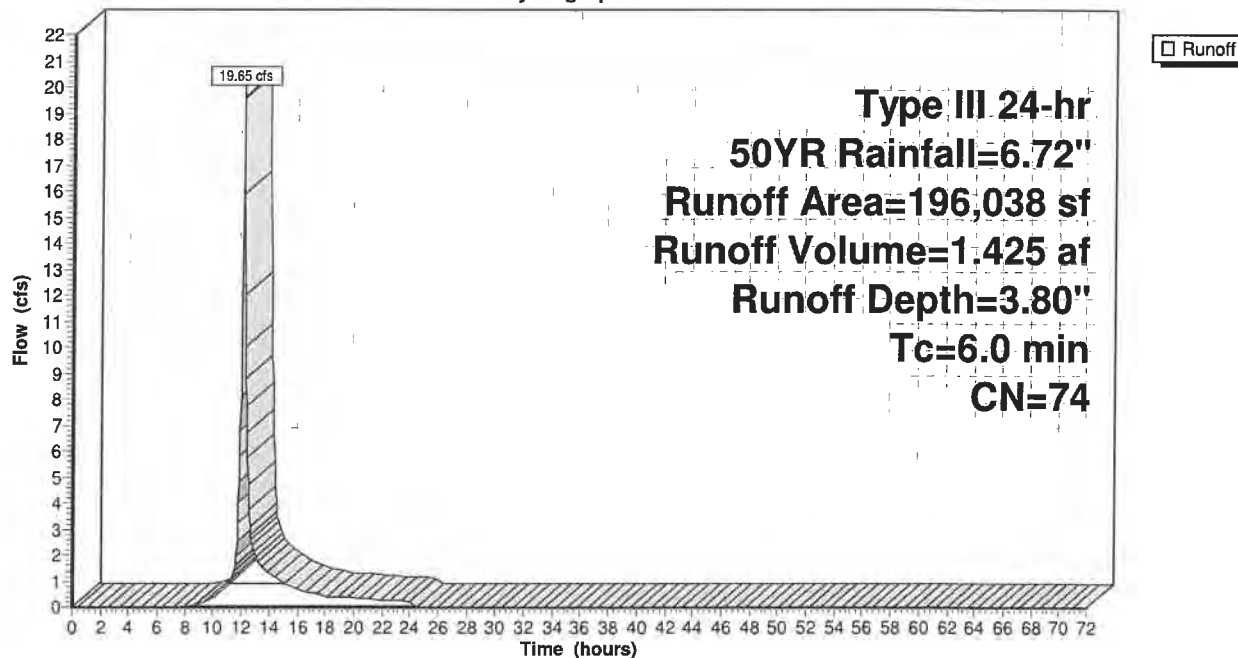

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 66

Summary for Subcatchment DA-7: P-7

Runoff = 12.24 cfs @ 12.09 hrs, Volume= 0.887 af, Depth= 3.70"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
125,523	73	Woods, Fair, HSG C
125,523		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-7: P-7

Hydrograph

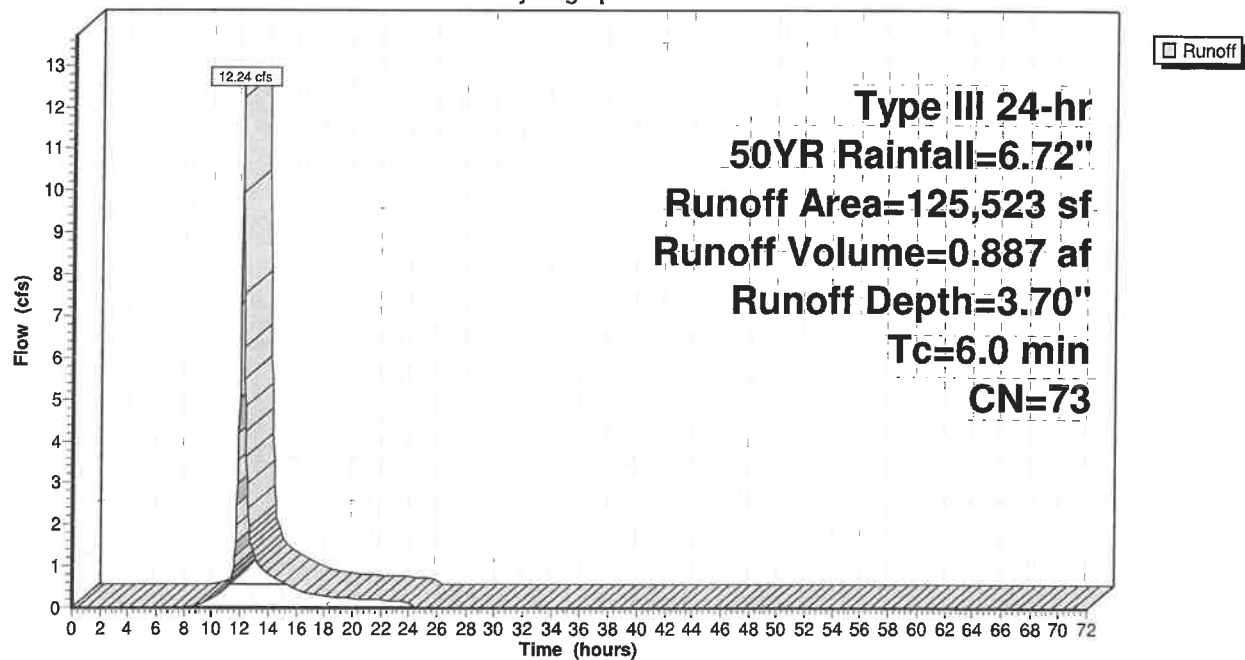

21-153 Post Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 67


Summary for Reach 1R: POND

Inflow Area = 62.753 ac, 4.43% Impervious, Inflow Depth = 3.72" for 50YR event
Inflow = 125.08 cfs @ 12.40 hrs, Volume= 19.468 af
Outflow = 125.08 cfs @ 12.40 hrs, Volume= 19.468 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 1R: POND

Hydrograph

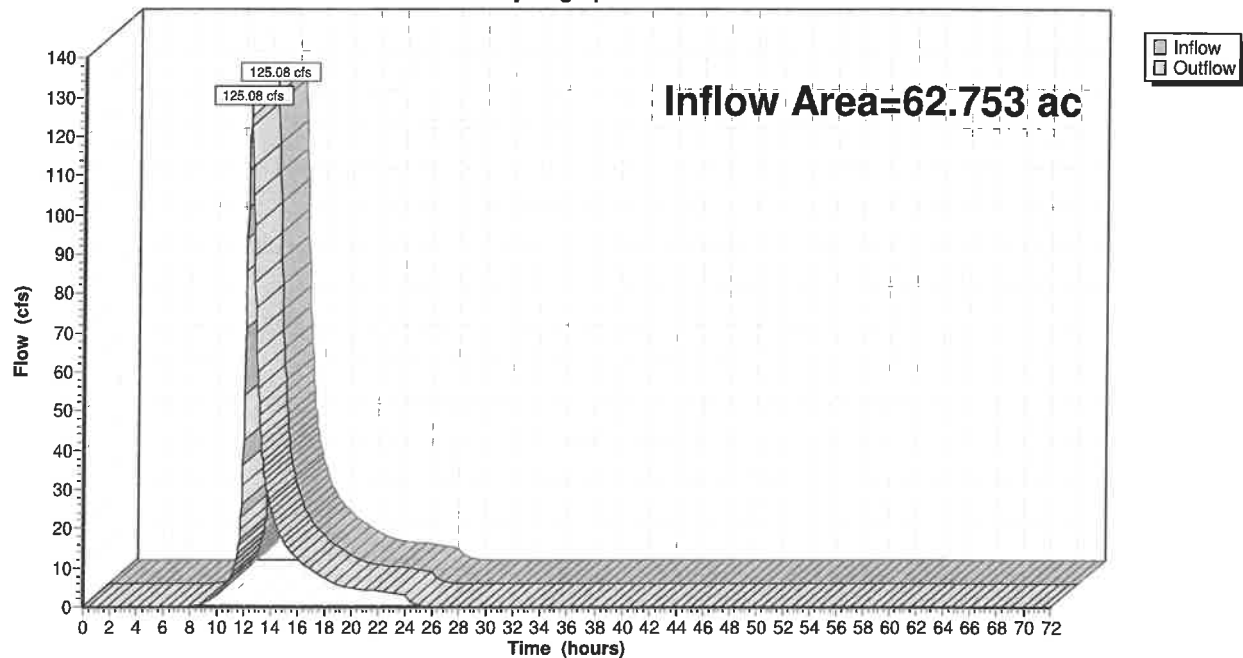

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023


Page 68

Summary for Reach 2R: WETLAND

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 3.65" for 50YR event
Inflow = 40.93 cfs @ 12.42 hrs, Volume= 6.745 af
Outflow = 40.93 cfs @ 12.42 hrs, Volume= 6.745 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 2R: WETLAND

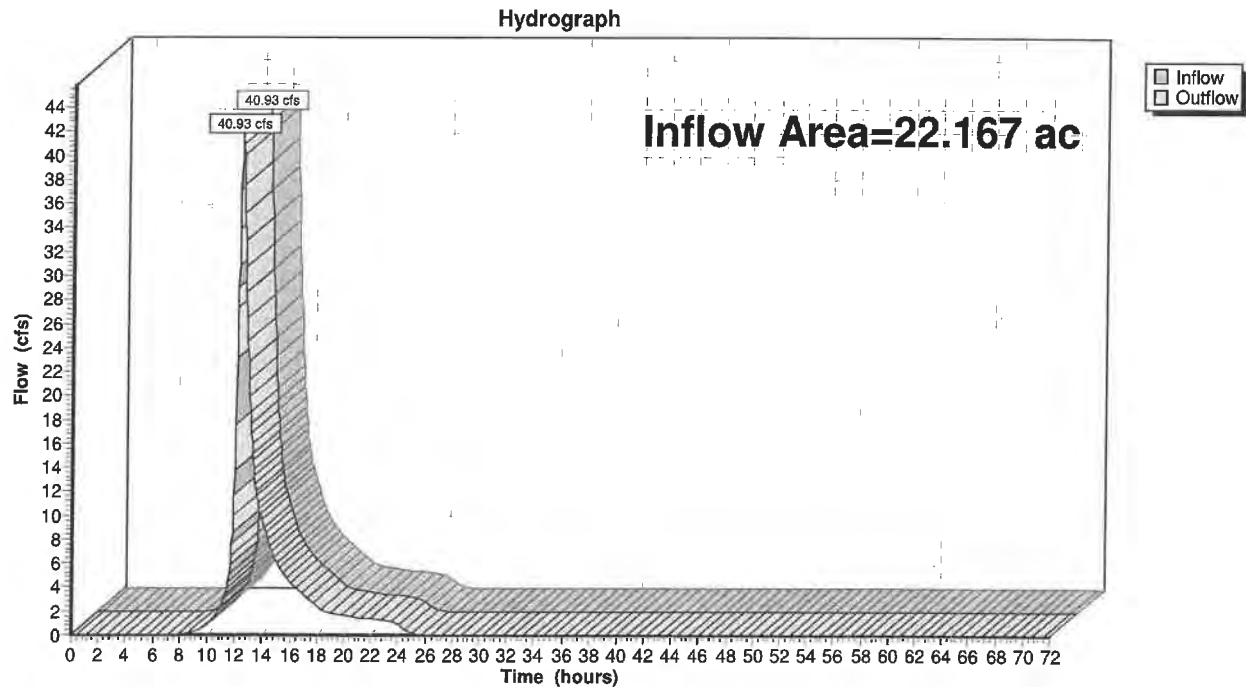

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 69

Summary for Reach 3R: CULVERT

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 3.65" for 50YR event
Inflow = 40.93 cfs @ 12.42 hrs, Volume= 6.745 af
Outflow = 40.93 cfs @ 12.42 hrs, Volume= 6.745 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Max. Velocity= 24.86 fps, Min. Travel Time= 0.0 min
Avg. Velocity = 10.69 fps, Avg. Travel Time= 0.1 min


Peak Storage= 91 cf @ 12.42 hrs
Average Depth at Peak Storage= 0.85'
Bank-Full Depth= 3.00' Flow Area= 7.1 sf, Capacity= 233.83 cfs

36.0" Round Pipe
n= 0.010 PVC, smooth interior
Length= 55.0' Slope= 0.0727 '/'
Inlet Invert= 924.00', Outlet Invert= 920.00'



Reach 3R: CULVERT

Hydrograph

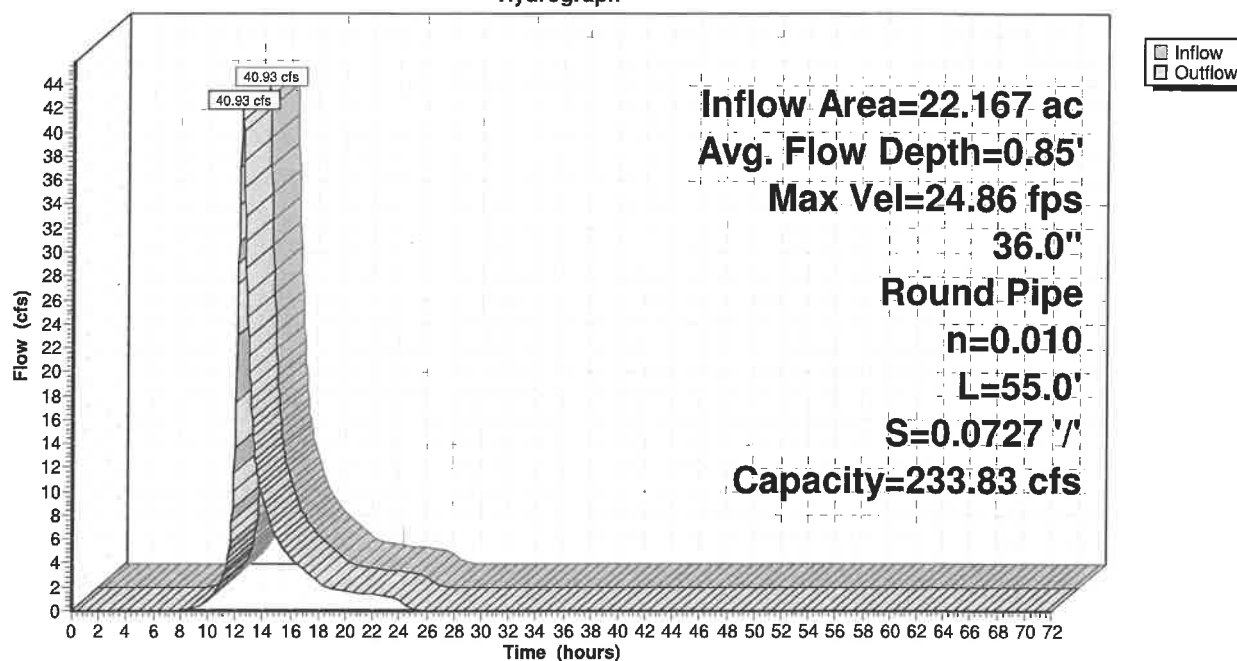

21-153 POst Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 70

Summary for Pond PND1: BASIN1

Inflow Area = 7.308 ac, 6.13% Impervious, Inflow Depth = 3.90" for 50YR event
 Inflow = 22.41 cfs @ 12.28 hrs, Volume= 2.377 af
 Outflow = 9.04 cfs @ 12.70 hrs, Volume= 2.377 af, Atten= 60%, Lag= 25.1 min
 Discarded = 0.22 cfs @ 12.70 hrs, Volume= 0.208 af
 Primary = 8.82 cfs @ 12.70 hrs, Volume= 2.170 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 937.43' @ 12.70 hrs Surf.Area= 9,406 sf Storage= 33,004 cf

Plug-Flow detention time= 73.1 min calculated for 2.377 af (100% of inflow)
 Center-of-Mass det. time= 72.8 min (907.3 - 834.5)

Volume	Invert	Avail.Storage	Storage Description
#1	932.00'	38,575 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
932.00	2,235	0	0
934.00	5,450	7,685	7,685
936.00	7,670	13,120	20,805
938.00	10,100	17,770	38,575

Device	Routing	Invert	Outlet Devices
#1	Primary	932.75'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#2	Discarded	932.00'	1.020 in/hr Exfiltration over Surface area
#3	Primary	934.35'	8.0" Vert. Orifice/Grate C= 0.600
#4	Primary	936.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	937.75'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31 3.30 3.31 3.32

Discarded OutFlow Max=0.22 cfs @ 12.70 hrs HW=937.43' (Free Discharge)

↑ **2=Exfiltration** (Exfiltration Controls 0.22 cfs)

Primary OutFlow Max=8.82 cfs @ 12.70 hrs HW=937.43' (Free Discharge)

↑ **1=Orifice/Grate** (Orifice Controls 3.98 cfs @ 10.13 fps)

↑ **3=Orifice/Grate** (Orifice Controls 2.78 cfs @ 7.98 fps)

↑ **4=Orifice/Grate** (Orifice Controls 2.05 cfs @ 5.23 fps)

↑ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 71

Pond PND1: BASIN1

Hydrograph

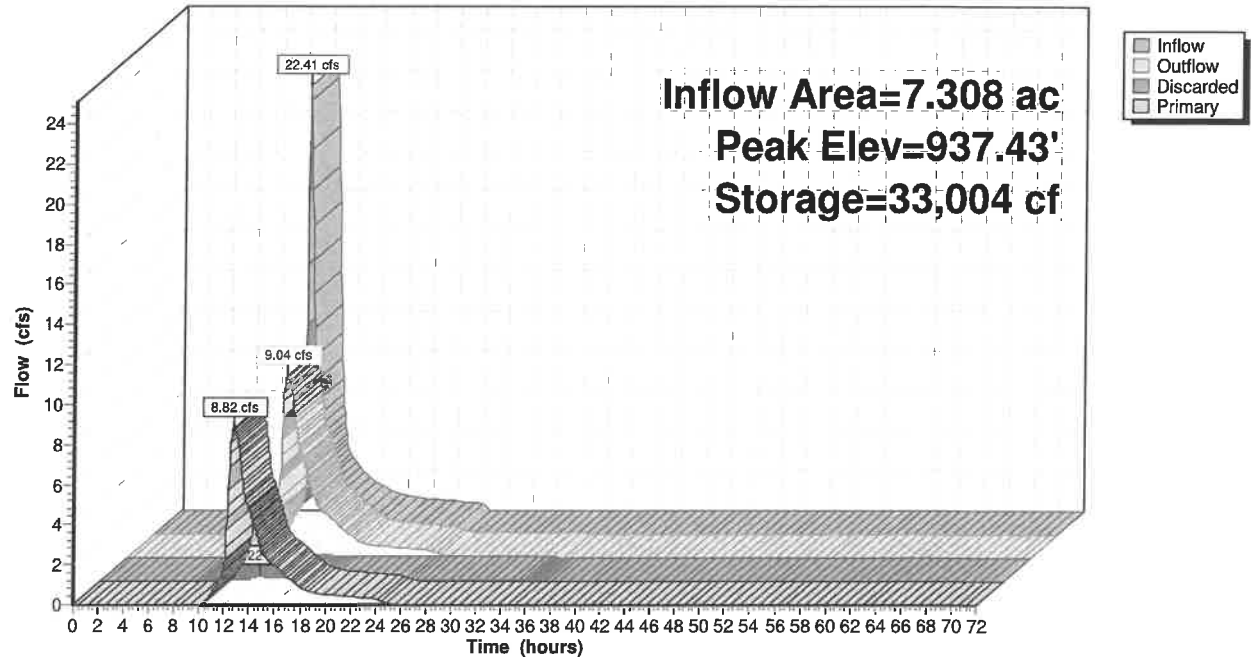

21-153 P0st Development R1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 72

Summary for Pond PND2: BASIN2

Inflow Area = 7.691 ac, 16.28% Impervious, Inflow Depth = 4.12" for 50YR event
 Inflow = 24.32 cfs @ 12.29 hrs, Volume= 2.637 af
 Outflow = 10.97 cfs @ 12.68 hrs, Volume= 2.637 af, Atten= 55%, Lag= 23.2 min
 Discarded = 0.26 cfs @ 12.68 hrs, Volume= 0.328 af
 Primary = 10.71 cfs @ 12.68 hrs, Volume= 2.309 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 927.23' @ 12.68 hrs Surf.Area= 11,015 sf Storage= 38,549 cf

Plug-Flow detention time= 108.1 min calculated for 2.636 af (100% of inflow)
 Center-of-Mass det. time= 108.7 min (939.6 - 830.9)

Volume	Invert	Avail.Storage	Storage Description
#1	922.00'	47,450 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
922.00	3,730	0	0
924.00	6,565	10,295	10,295
926.00	9,230	15,795	26,090
928.00	12,130	21,360	47,450

Device	Routing	Invert	Outlet Devices
#1	Discarded	922.00'	1.020 in/hr Exfiltration over Surface area
#2	Primary	923.00'	8.0" Vert. Orifice/Grate C= 0.600
#3	Primary	924.60'	12.0" Vert. Orifice/Grate C= 0.600
#4	Primary	926.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	927.40'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00			
2.50 3.00			
Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31			
3.30 3.31 3.32			

Discarded OutFlow Max=0.26 cfs @ 12.68 hrs HW=927.23' (Free Discharge)

↑ **1=Exfiltration** (Exfiltration Controls 0.26 cfs)

Primary OutFlow Max=10.70 cfs @ 12.68 hrs HW=927.23' (Free Discharge)

↑ **2=Orifice/Grate** (Orifice Controls 3.32 cfs @ 9.50 fps)

↑ **3=Orifice/Grate** (Orifice Controls 5.52 cfs @ 7.02 fps)

↑ **4=Orifice/Grate** (Orifice Controls 1.87 cfs @ 4.76 fps)

↑ **5=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 50YR Rainfall=6.72"

Printed 2/21/2023

Page 73

Pond PND2: BASIN2

Hydrograph

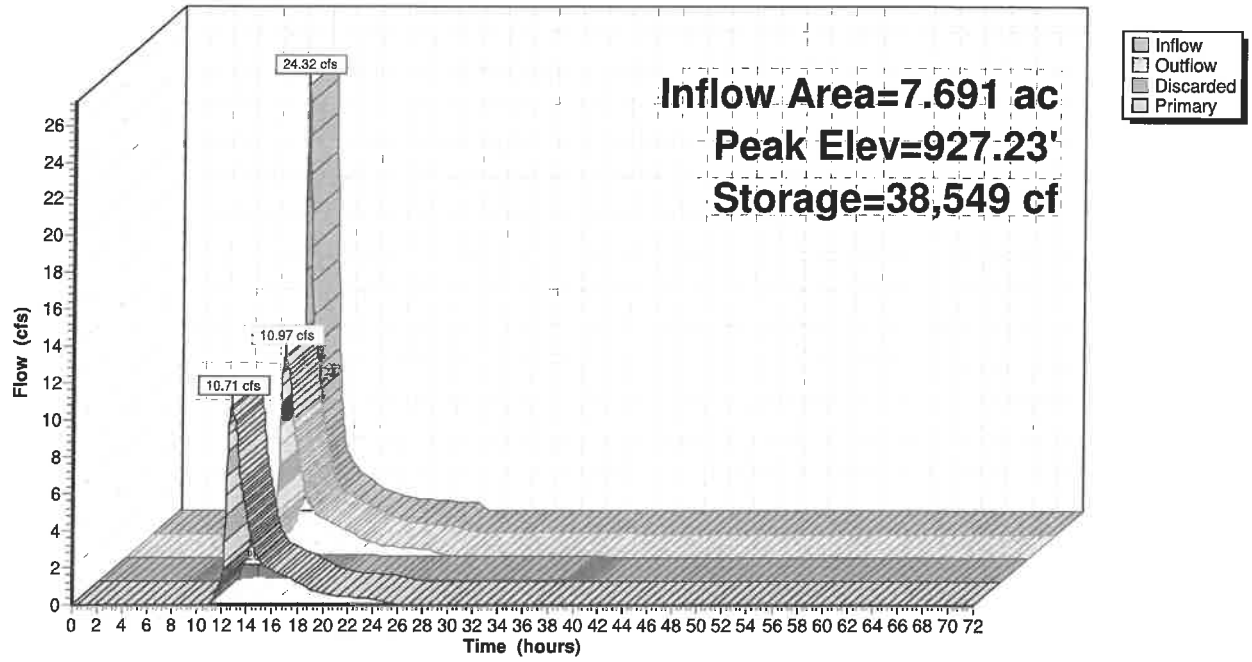

21-153 POst Development R1*Type III 24-hr 100YR Rainfall=7.59"*

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 74

Time span=0.00-72.00 hrs, dt=0.05 hrs, 1441 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment DA-1: P-1 Runoff Area=911,170 sf 2.34% Impervious Runoff Depth=4.56"
Flow Length=1,280' Tc=32.1 min CN=74 Runoff=61.22 cfs 7.950 af

Subcatchment DA-2: P-2 Runoff Area=335,021 sf 16.28% Impervious Runoff Depth=4.90"
Flow Length=1,280' Tc=21.2 min CN=77 Runoff=28.88 cfs 3.140 af

Subcatchment DA-3: P-3 Runoff Area=325,676 sf 5.79% Impervious Runoff Depth=4.56"
Flow Length=524' Slope=0.0300 '/' Tc=17.6 min CN=74 Runoff=28.26 cfs 2.841 af

Subcatchment DA-4: P-4 Runoff Area=521,761 sf 0.00% Impervious Runoff Depth=4.45"
Flow Length=1,071' Tc=30.3 min CN=73 Runoff=35.12 cfs 4.440 af

Subcatchment DA-5: P-5 Runoff Area=318,322 sf 6.13% Impervious Runoff Depth=4.67"
Flow Length=1,184' Tc=20.1 min CN=75 Runoff=26.85 cfs 2.846 af

Subcatchment DA-6: P-6 Runoff Area=196,038 sf 3.57% Impervious Runoff Depth=4.56"
Tc=6.0 min CN=74 Runoff=23.54 cfs 1.710 af

Subcatchment DA-7: P-7 Runoff Area=125,523 sf 0.00% Impervious Runoff Depth=4.45"
Tc=6.0 min CN=73 Runoff=14.72 cfs 1.068 af

Reach 1R: POND Inflow=149.57 cfs 23.438 af
Outflow=149.57 cfs 23.438 af

Reach 2R: WETLAND Inflow=48.87 cfs 8.137 af
Outflow=48.87 cfs 8.137 af

Reach 3R: CULVERT Avg. Flow Depth=0.93' Max Vel=26.15 fps Inflow=48.87 cfs 8.137 af
36.0" Round Pipe n=0.010 L=55.0' S=0.0727 '/' Capacity=233.83 cfs Outflow=48.86 cfs 8.137 af

Pond PND1: BASIN1 Peak Elev=937.94' Storage=37,978 cf Inflow=26.85 cfs 2.846 af
Discarded=0.24 cfs 0.218 af Primary=14.18 cfs 2.628 af Outflow=14.41 cfs 2.846 af

Pond PND2: BASIN2 Peak Elev=927.62' Storage=42,997 cf Inflow=28.88 cfs 3.140 af
Discarded=0.27 cfs 0.340 af Primary=17.47 cfs 2.800 af Outflow=17.74 cfs 3.140 af

Total Runoff Area = 62.753 ac Runoff Volume = 23.996 af Average Runoff Depth = 4.59"
95.57% Pervious = 59.970 ac 4.43% Impervious = 2.783 ac

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 75

Summary for Subcatchment DA-1: P-1

Runoff = 61.22 cfs @ 12.45 hrs, Volume= 7.950 af, Depth= 4.56"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
878,323	73	Woods, Fair, HSG C
21,347	98	Paved parking, HSG C
11,500	74	>75% Grass cover, Good, HSG C
911,170	74	Weighted Average
889,823		97.66% Pervious Area
21,347		2.34% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
11.9	620	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
2.3	225	0.0100	1.61		Shallow Concentrated Flow, Travel Path C TO D Unpaved Kv= 16.1 fps
7.4	385	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH D TO E Woodland Kv= 5.0 fps
32.1	1,280	Total			

Subcatchment DA-1: P-1

Hydrograph

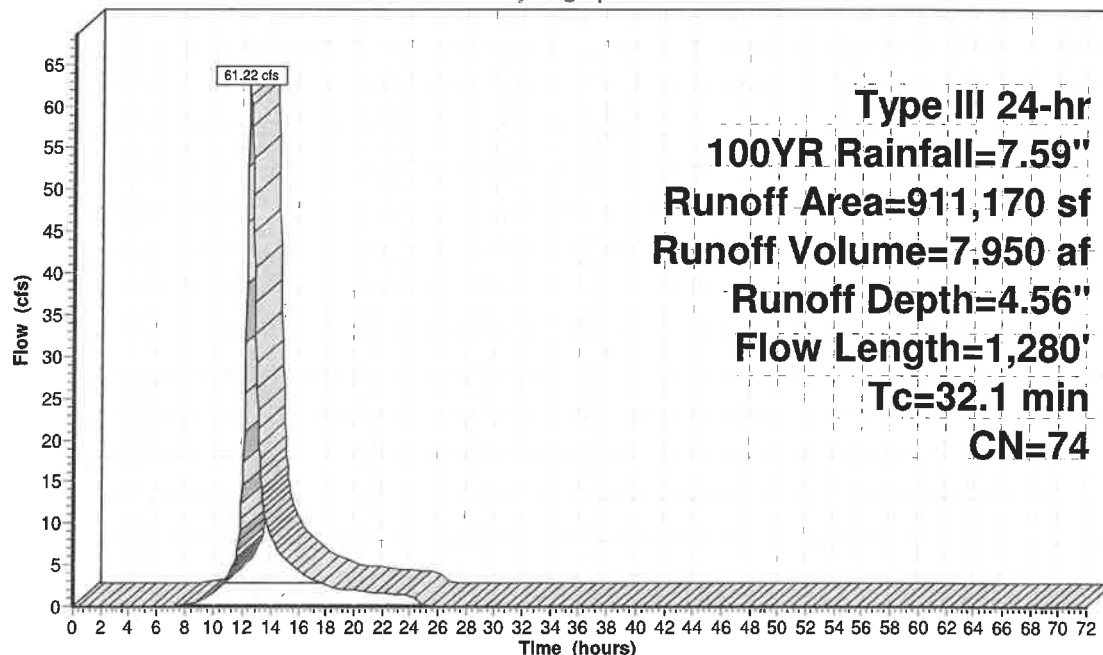

21-153 P0st Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 76

Summary for Subcatchment DA-2: P-2

Runoff = 28.88 cfs @ 12.29 hrs, Volume= 3.140 af, Depth= 4.90"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
273,495	73	Woods, Fair, HSG C
54,526	98	Paved parking, HSG C
7,000	74	>75% Grass cover, Good, HSG C
335,021	77	Weighted Average
280,495		83.72% Pervious Area
54,526		16.28% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.9	530	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
2.0	350	0.0200	2.87		Shallow Concentrated Flow, TRAVEL PATH C TO D Paved Kv= 20.3 fps
0.8	350	0.0100	7.73	13.66	Pipe Channel, TRAVEL PATH D TO E 18.0" Round Area= 1.8 sf Perim= 4.7' r= 0.38' n= 0.010 PVC, smooth interior
21.2	1,280	Total			

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 77

Subcatchment DA-2: P-2

Hydrograph

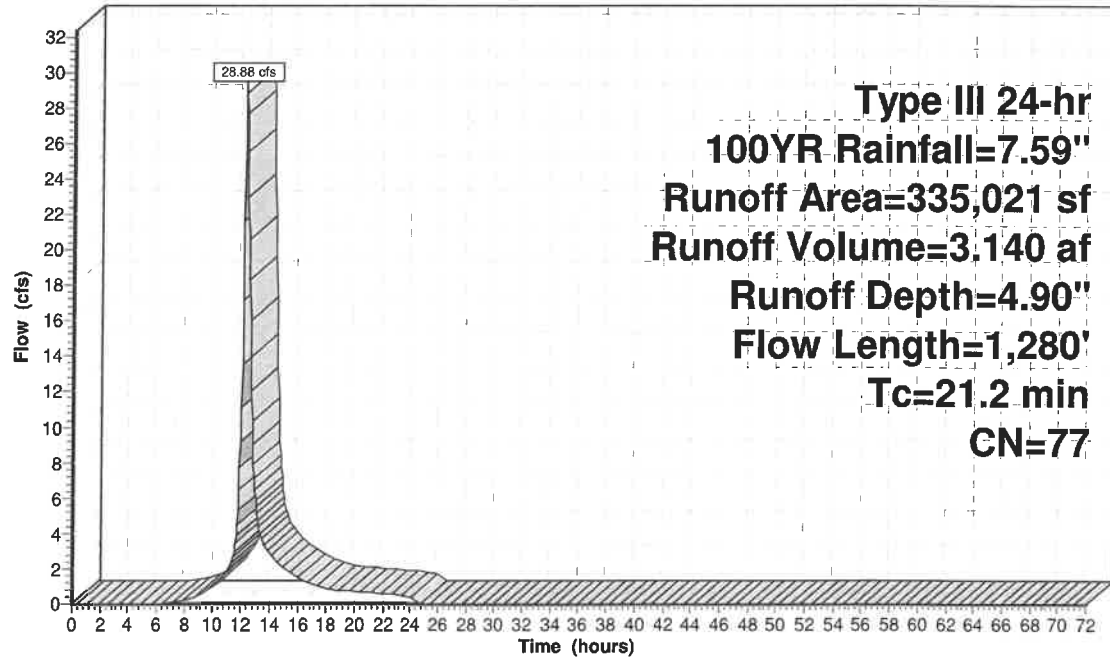

21-153 POst Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 78

Summary for Subcatchment DA-3: P-3

Runoff = 28.26 cfs @ 12.24 hrs, Volume= 2.841 af, Depth= 4.56"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
296,825	73	Woods, Fair, HSG C
18,851	98	Paved parking, HSG C
10,000	74	>75% Grass cover, Good, HSG C
325,676	74	Weighted Average
306,825		94.21% Pervious Area
18,851		5.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
10.5	50	0.0300	0.08		Sheet Flow, TRAVEL PATH A TO B
					Woods: Light underbrush n= 0.400 P2= 3.20"
0.9	150	0.0300	2.79		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Unpaved Kv= 16.1 fps
6.2	324	0.0300	0.87		Shallow Concentrated Flow, TRAVEL PATH C TO D
					Woodland Kv= 5.0 fps
17.6	524	Total			

Subcatchment DA-3: P-3

Hydrograph

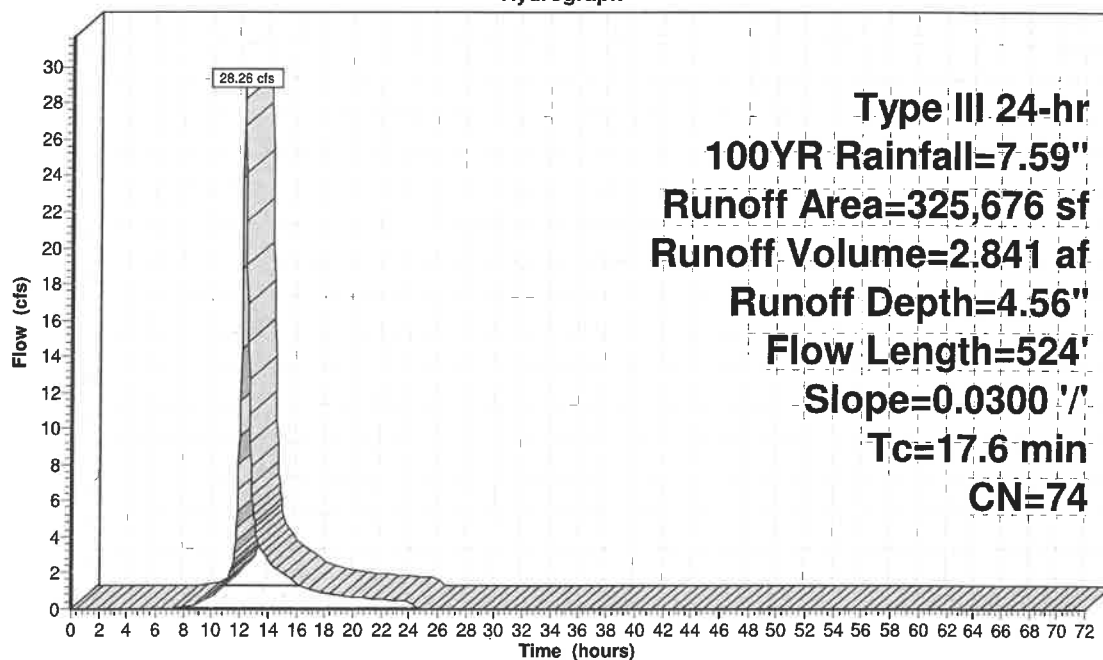

21-153 POst Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 79

Summary for Subcatchment DA-4: P-4

Runoff = 35.12 cfs @ 12.42 hrs, Volume= 4.440 af, Depth= 4.45"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
521,761	73	Woods, Fair, HSG C
521,761		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
12.3	50	0.0200	0.07		Sheet Flow, TRAVEL PATH A TO B Woods: Light underbrush n= 0.400 P2= 3.20"
7.6	321	0.0200	0.71		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
10.4	700	0.0500	1.12		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
30.3	1,071	Total			

Subcatchment DA-4: P-4

Hydrograph

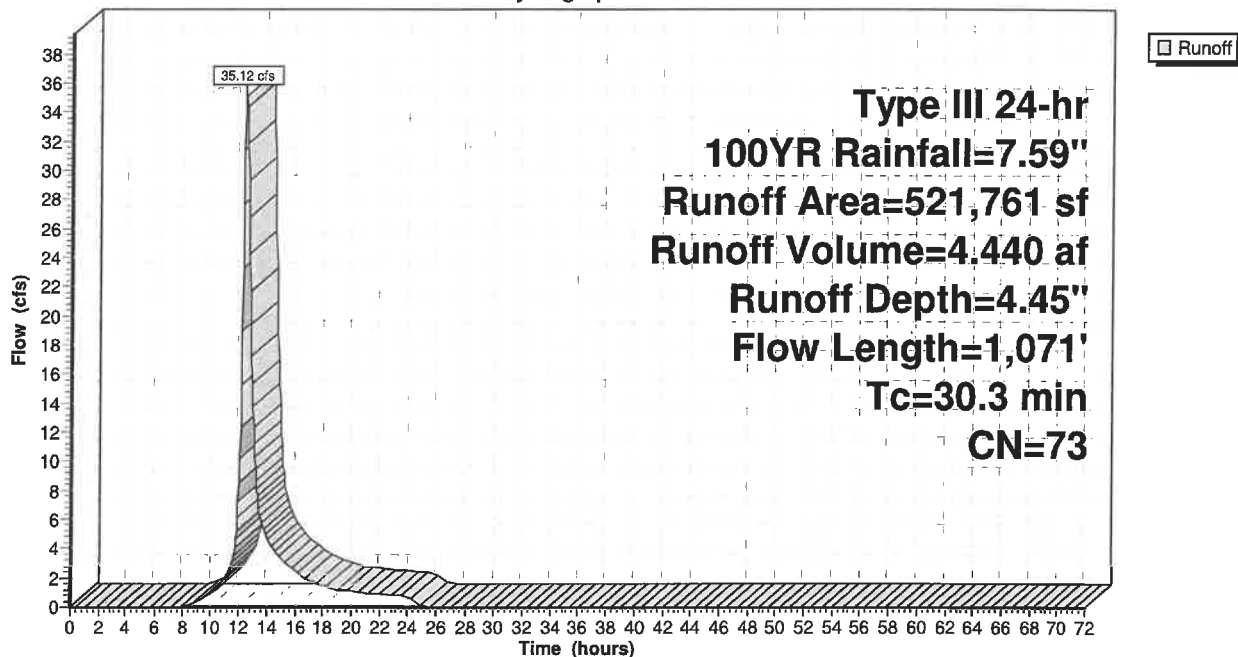

21-153 P0st Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 80

Summary for Subcatchment DA-5: P-5

Runoff = 26.85 cfs @ 12.27 hrs, Volume= 2.846 af, Depth= 4.67"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
266,167	73	Woods, Fair, HSG C
19,500	98	Paved parking, HSG C
32,655	74	>75% Grass cover, Good, HSG C
318,322	75	Weighted Average
298,822		93.87% Pervious Area
19,500		6.13% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
8.2	50	0.0200	0.10		Sheet Flow, TRAVEL PATH A TO B Grass: Dense n= 0.240 P2= 3.20"
3.4	200	0.0200	0.99		Shallow Concentrated Flow, TRAVELPATH B TO C Short Grass Pasture Kv= 7.0 fps
7.6	643	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH C TO D Woodland Kv= 5.0 fps
0.7	171	0.0400	4.06		Shallow Concentrated Flow, TRAVEL PATH D TO E Paved Kv= 20.3 fps
0.2	120	0.0200	9.68	11.88	Pipe Channel, TRAVEL PATH E TO F 15.0" Round Area= 1.2 sf Perim= 3.9' r= 0.31' n= 0.010 PVC, smooth interior
20.1	1,184	Total			

21-153 P-1 Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 81

Subcatchment DA-5: P-5

Hydrograph

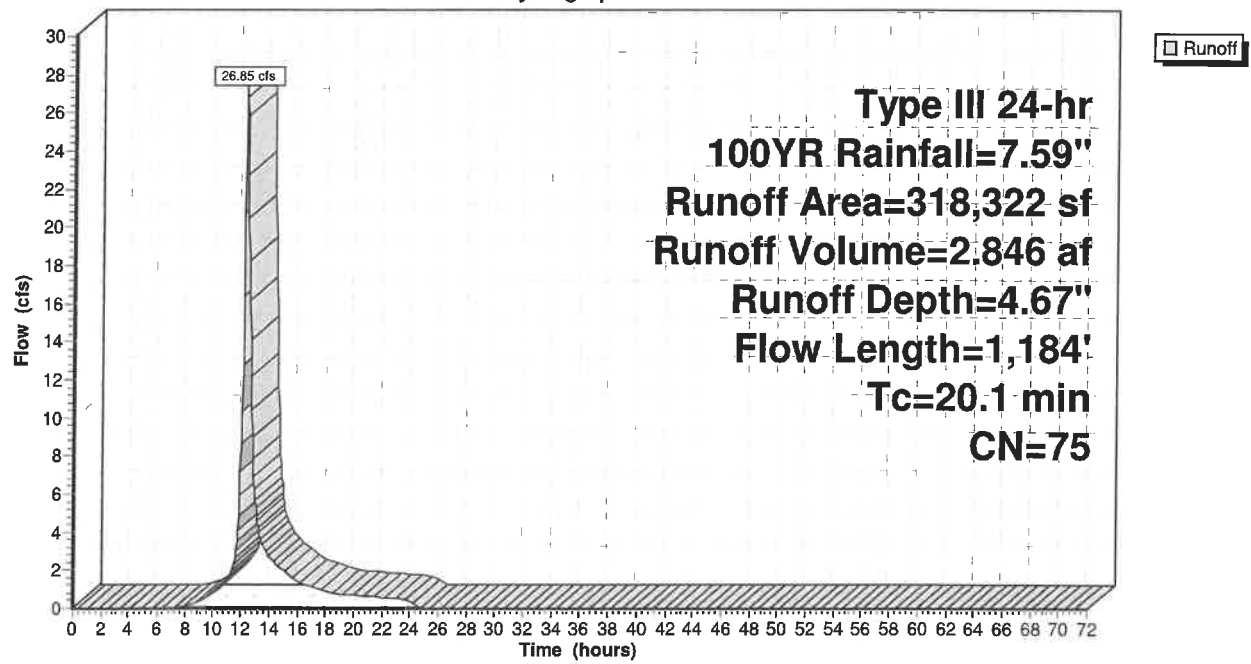

21-153 POst Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 82

Summary for Subcatchment DA-6: P-6

Runoff = 23.54 cfs @ 12.09 hrs, Volume= 1.710 af, Depth= 4.56"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
119,978	73	Woods, Fair, HSG C
69,060	74	>75% Grass cover, Good, HSG C
7,000	98	Paved parking, HSG C
196,038	74	Weighted Average
189,038		96.43% Pervious Area
7,000		3.57% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-6: P-6

Hydrograph

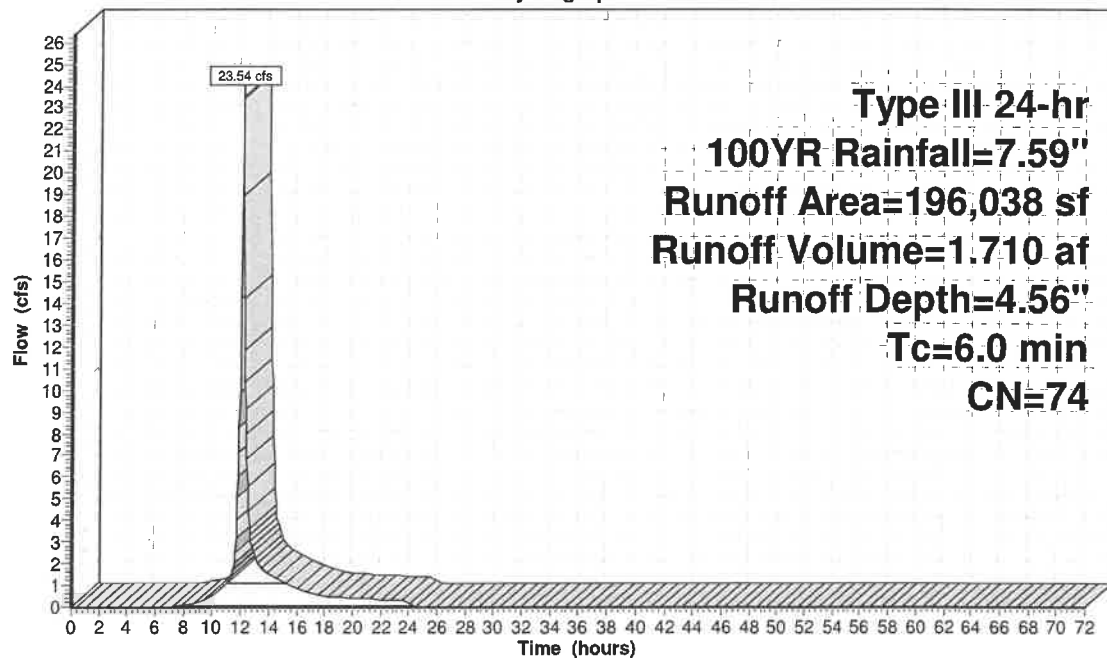

21-153 POst Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 83

Summary for Subcatchment DA-7: P-7

Runoff = 14.72 cfs @ 12.09 hrs, Volume= 1.068 af, Depth= 4.45"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
125,523	73	Woods, Fair, HSG C
125,523		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, TRAVEL PATH

Subcatchment DA-7: P-7

Hydrograph

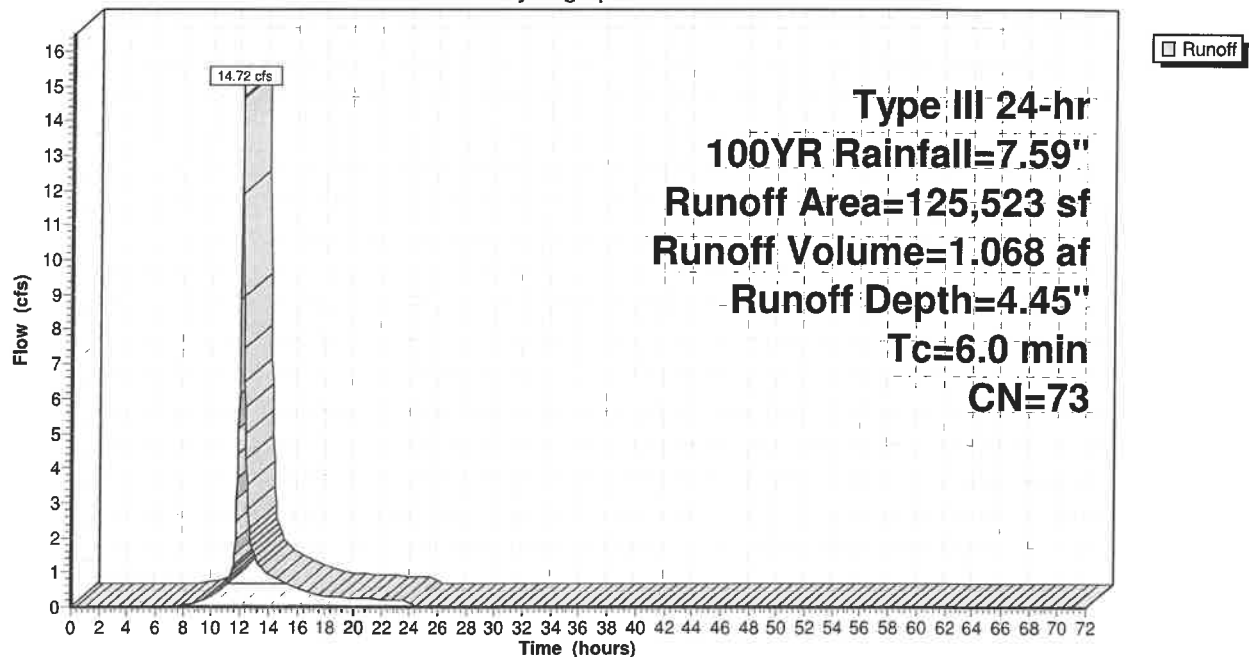

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 84


Summary for Reach 1R: POND

Inflow Area = 62.753 ac, 4.43% Impervious, Inflow Depth = 4.48" for 100YR event
Inflow = 149.57 cfs @ 12.39 hrs, Volume= 23.438 af
Outflow = 149.57 cfs @ 12.39 hrs, Volume= 23.438 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 1R: POND

Hydrograph

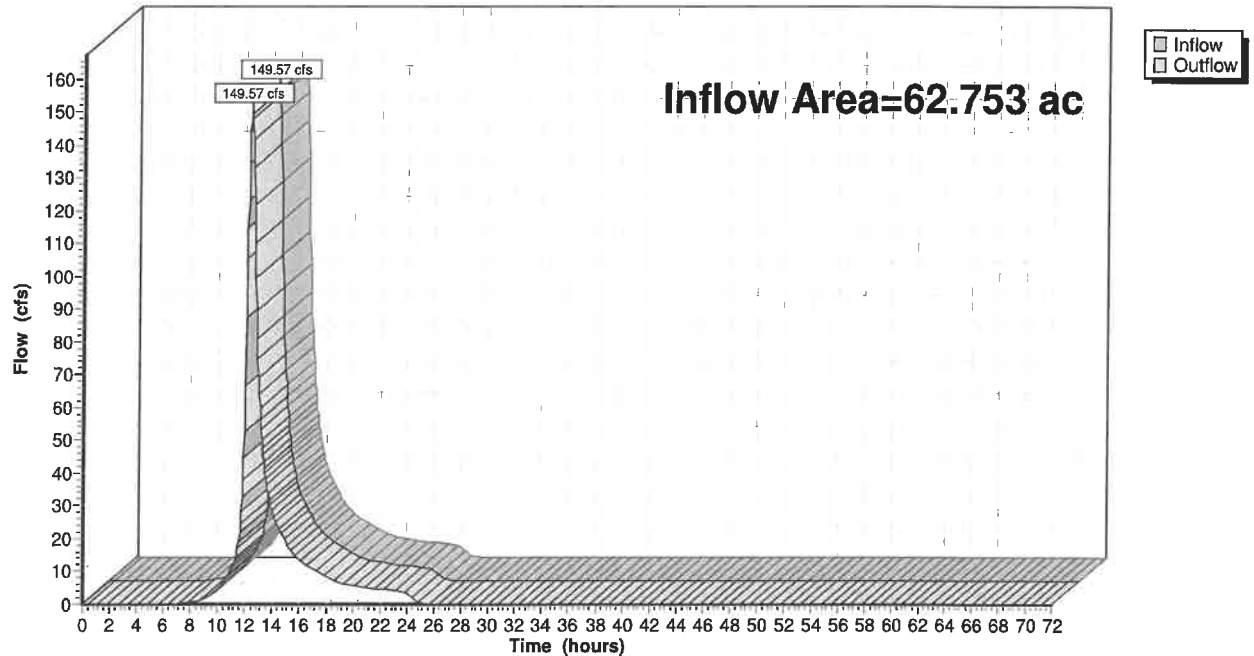

21-153 P0st Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 85


Summary for Reach 2R: WETLAND

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 4.40" for 100YR event
Inflow = 48.87 cfs @ 12.41 hrs, Volume= 8.137 af
Outflow = 48.87 cfs @ 12.41 hrs, Volume= 8.137 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Reach 2R: WETLAND

Hydrograph

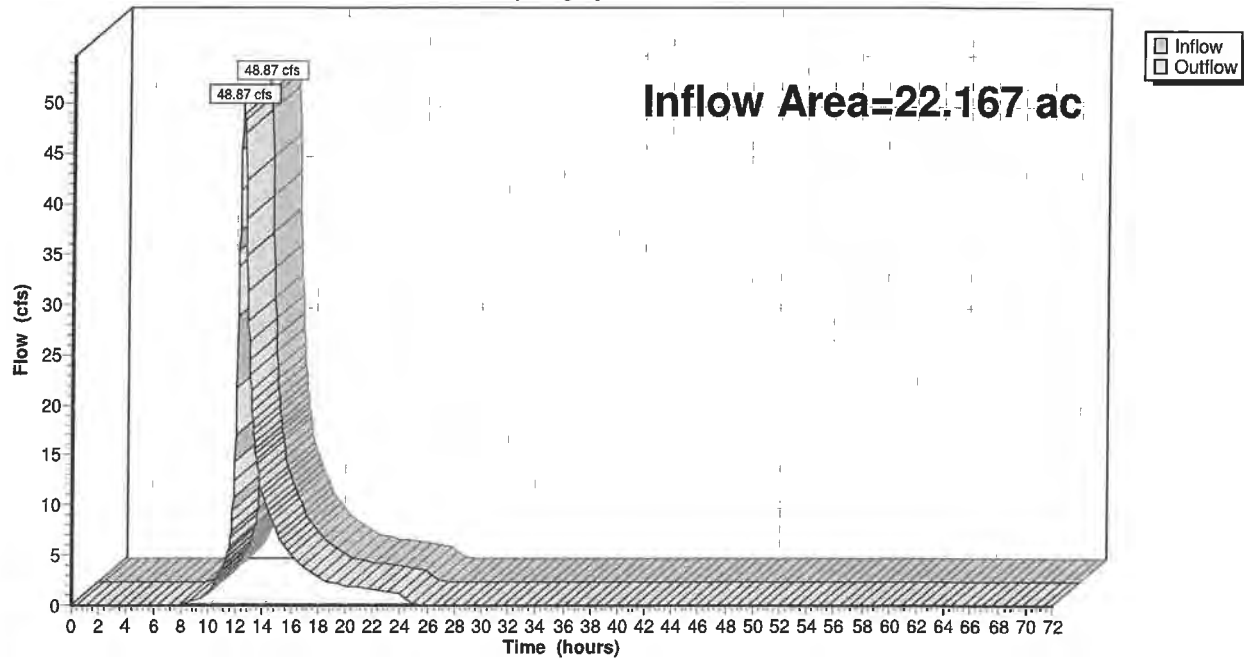

21-153 Post Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 86

Summary for Reach 3R: CULVERT

Inflow Area = 22.167 ac, 2.02% Impervious, Inflow Depth = 4.40" for 100YR event
Inflow = 48.87 cfs @ 12.41 hrs, Volume= 8.137 af
Outflow = 48.86 cfs @ 12.41 hrs, Volume= 8.137 af, Atten= 0%, Lag= 0.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs

Max. Velocity= 26.15 fps, Min. Travel Time= 0.0 min

Avg. Velocity = 11.13 fps, Avg. Travel Time= 0.1 min

Peak Storage= 103 cf @ 12.41 hrs

Average Depth at Peak Storage= 0.93'

Bank-Full Depth= 3.00' Flow Area= 7.1 sf, Capacity= 233.83 cfs

36.0" Round Pipe

n= 0.010 PVC, smooth interior


Length= 55.0' Slope= 0.0727 '/'

Inlet Invert= 924.00', Outlet Invert= 920.00'



Reach 3R: CULVERT

Hydrograph

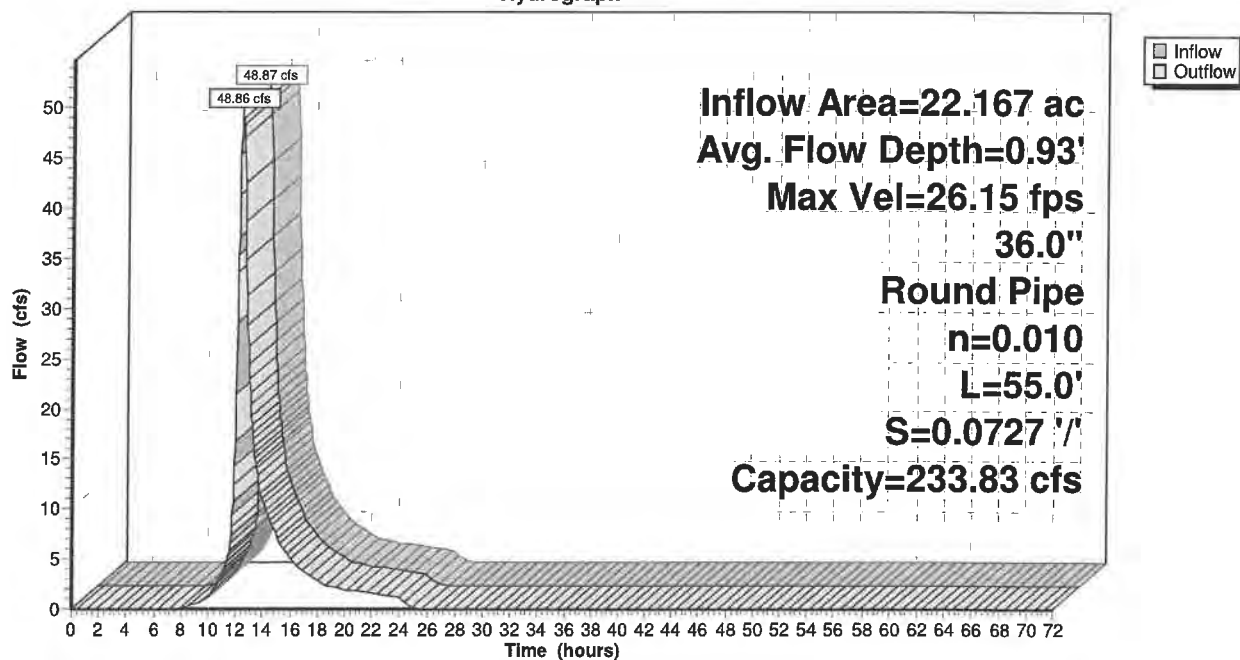

21-153 P0st Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 87

Summary for Pond PND1: BASIN1

Inflow Area = 7.308 ac, 6.13% Impervious, Inflow Depth = 4.67" for 100YR event
 Inflow = 26.85 cfs @ 12.27 hrs, Volume= 2.846 af
 Outflow = 14.41 cfs @ 12.60 hrs, Volume= 2.846 af, Atten= 46%, Lag= 19.6 min
 Discarded = 0.24 cfs @ 12.60 hrs, Volume= 0.218 af
 Primary = 14.18 cfs @ 12.60 hrs, Volume= 2.628 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 937.94' @ 12.60 hrs Surf.Area= 10,028 sf Storage= 37,978 cf

Plug-Flow detention time= 68.6 min calculated for 2.844 af (100% of inflow)
 Center-of-Mass det. time= 69.0 min (898.4 - 829.4)

Volume	Invert	Avail.Storage	Storage Description
#1	932.00'	38,575 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
932.00	2,235	0	0
934.00	5,450	7,685	7,685
936.00	7,670	13,120	20,805
938.00	10,100	17,770	38,575

Device	Routing	Invert	Outlet Devices
#1	Primary	932.75'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#2	Discarded	932.00'	1.020 in/hr Exfiltration over Surface area
#3	Primary	934.35'	8.0" Vert. Orifice/Grate C= 0.600
#4	Primary	936.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	937.75'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
			Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00
			2.50 3.00
			Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31
			3.30 3.31 3.32

Discarded OutFlow Max=0.24 cfs @ 12.60 hrs HW=937.94' (Free Discharge)

↳ **2=Exfiltration** (Exfiltration Controls 0.24 cfs)

Primary OutFlow Max=14.16 cfs @ 12.60 hrs HW=937.94' (Free Discharge)

↳ **1=Orifice/Grate** (Orifice Controls 4.20 cfs @ 10.70 fps)

↳ **3=Orifice/Grate** (Orifice Controls 3.03 cfs @ 8.69 fps)

↳ **4=Orifice/Grate** (Orifice Controls 2.46 cfs @ 6.26 fps)

↳ **5=Broad-Crested Rectangular Weir** (Weir Controls 4.47 cfs @ 1.17 fps)

21-153 P0st Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 100YR Rainfall=7.59"

Printed 2/21/2023

Page 88

Pond PND1: BASIN1

Hydrograph

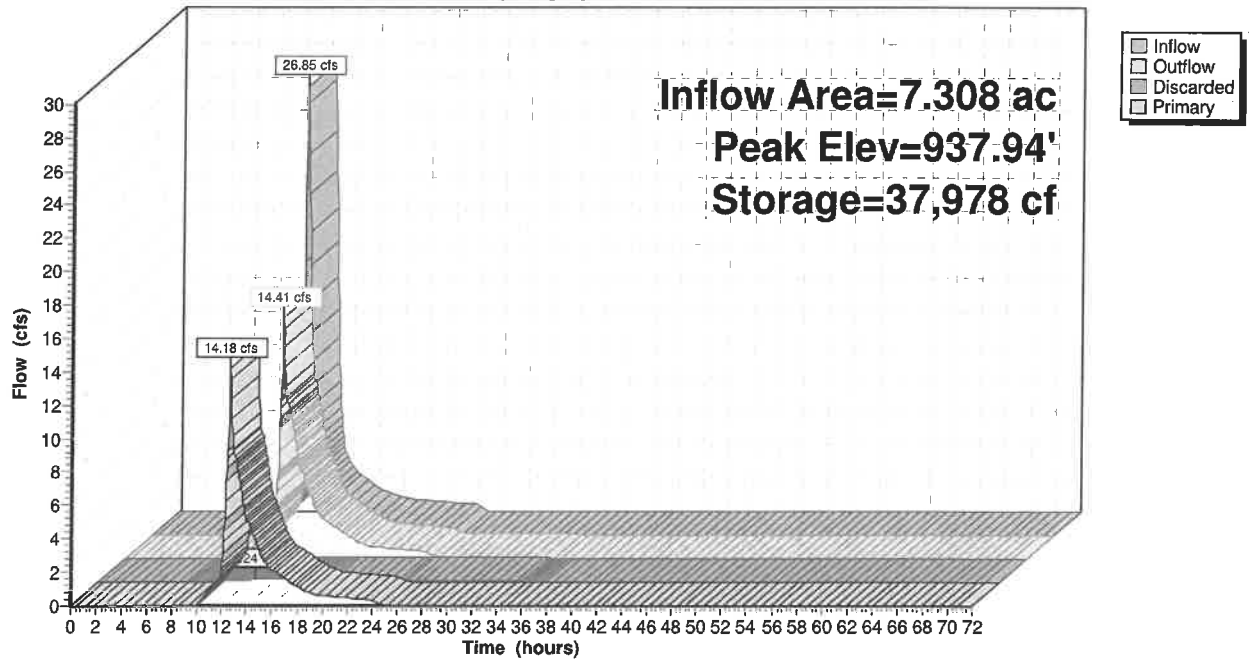

21-153 POst Development R1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 89

Summary for Pond PND2: BASIN2

Inflow Area = 7.691 ac, 16.28% Impervious, Inflow Depth = 4.90" for 100YR event
 Inflow = 28.88 cfs @ 12.29 hrs, Volume= 3.140 af
 Outflow = 17.74 cfs @ 12.57 hrs, Volume= 3.140 af, Atten= 39%, Lag= 16.8 min
 Discarded = 0.27 cfs @ 12.57 hrs, Volume= 0.340 af
 Primary = 17.47 cfs @ 12.57 hrs, Volume= 2.800 af

Routing by Stor-Ind method, Time Span= 0.00-72.00 hrs, dt= 0.05 hrs
 Peak Elev= 927.62' @ 12.57 hrs Surf.Area= 11,585 sf Storage= 42,997 cf

Plug-Flow detention time= 99.1 min calculated for 3.138 af (100% of inflow)
 Center-of-Mass det. time= 99.7 min (925.6 - 825.9)

Volume	Invert	Avail.Storage	Storage Description
#1	922.00'	47,450 cf	Custom Stage Data (Prismatic) Listed below (Recalc)

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
922.00	3,730	0	0
924.00	6,565	10,295	10,295
926.00	9,230	15,795	26,090
928.00	12,130	21,360	47,450

Device	Routing	Invert	Outlet Devices
#1	Discarded	922.00'	1.020 in/hr Exfiltration over Surface area
#2	Primary	923.00'	8.0" Vert. Orifice/Grate C= 0.600
#3	Primary	924.60'	12.0" Vert. Orifice/Grate C= 0.600
#4	Primary	926.00'	6.0" Vert. Orifice/Grate X 2.00 C= 0.600
#5	Primary	927.40'	20.0' long x 1.0' breadth Broad-Crested Rectangular Weir
			Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00
			2.50 3.00
			Coef. (English) 2.69 2.72 2.75 2.85 2.98 3.08 3.20 3.28 3.31
			3.30 3.31 3.32

Discarded OutFlow Max=0.27 cfs @ 12.57 hrs HW=927.62' (Free Discharge)

↑ **1=Exfiltration** (Exfiltration Controls 0.27 cfs)

Primary OutFlow Max=17.21 cfs @ 12.57 hrs HW=927.62' (Free Discharge)

↑ **2=Orifice/Grate** (Orifice Controls 3.48 cfs @ 9.97 fps)

↑ **3=Orifice/Grate** (Orifice Controls 6.00 cfs @ 7.64 fps)

↑ **4=Orifice/Grate** (Orifice Controls 2.21 cfs @ 5.63 fps)

↑ **5=Broad-Crested Rectangular Weir** (Weir Controls 5.52 cfs @ 1.26 fps)

21-153 Post Development R1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC


Type III 24-hr 100YR Rainfall=7.59"




Printed 2/21/2023

Page 90

Pond PND2: BASIN2

Hydrograph

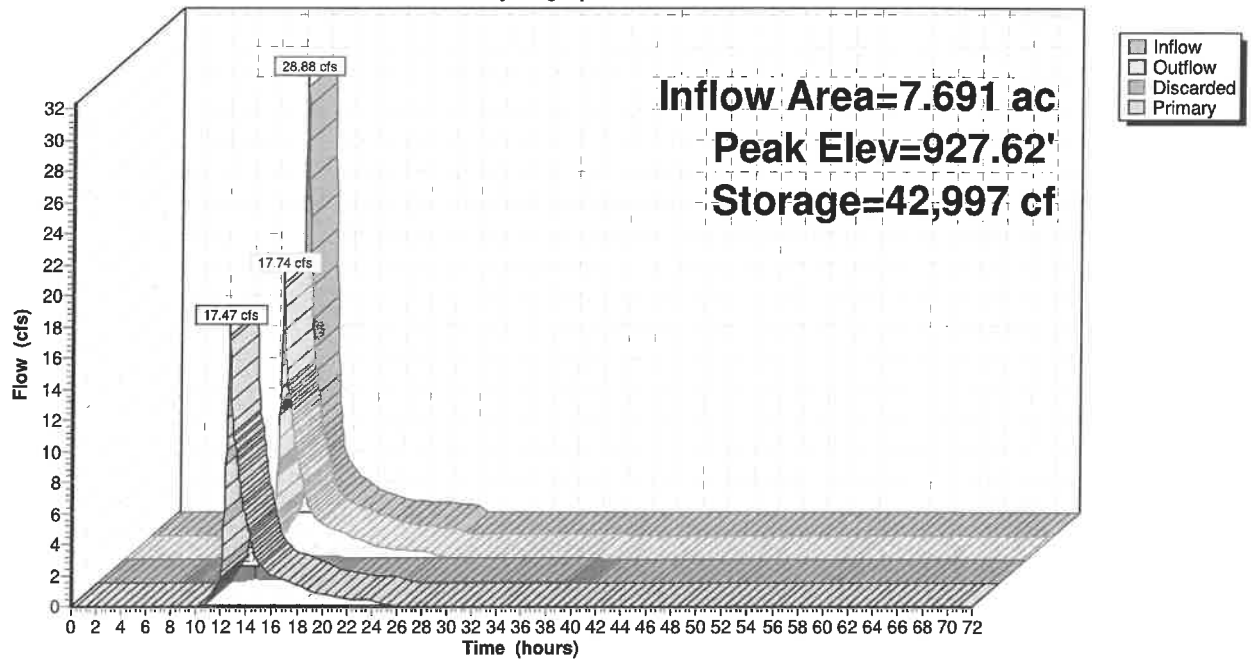

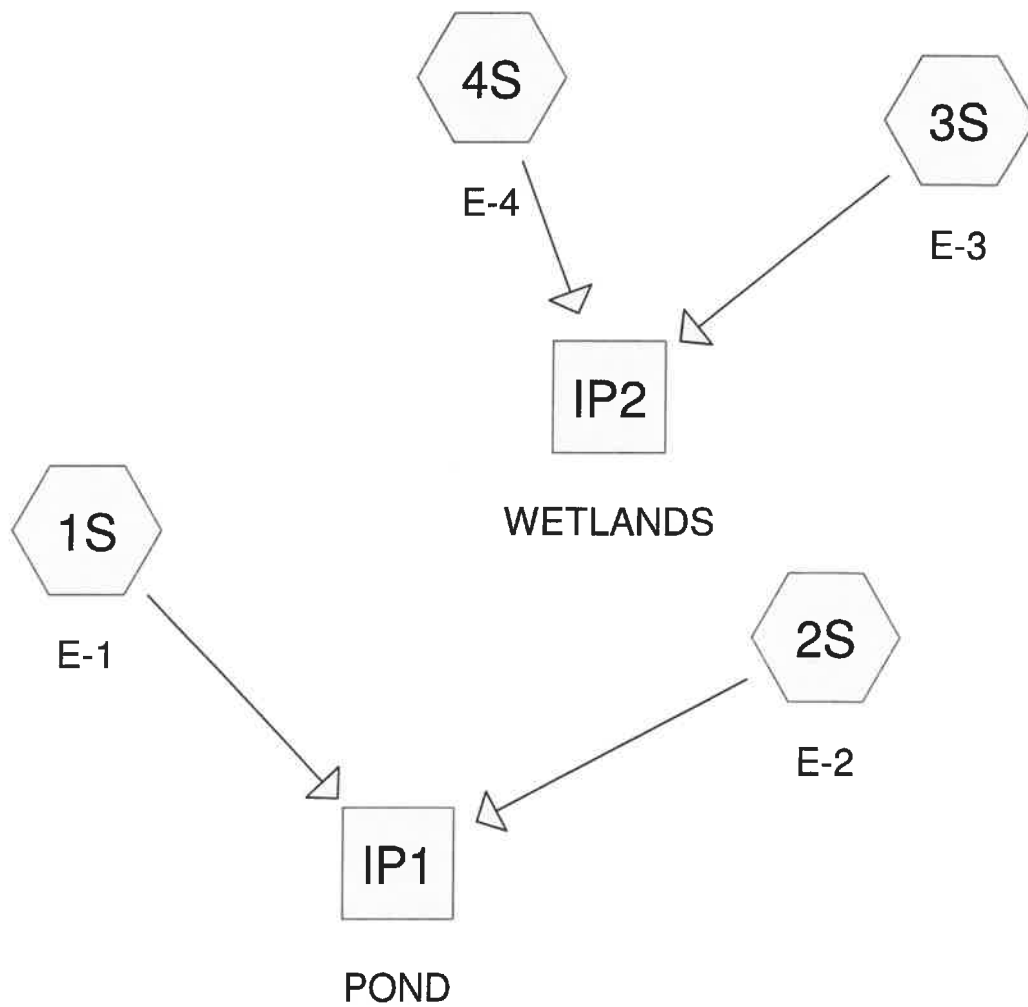

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Printed 2/21/2023

Page 2

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
64.727	73	Woods, Fair, HSG C (1S, 2S, 3S, 4S)
64.727	73	TOTAL AREA

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 3

Soil Listing (all nodes)

Area (acres)	Soil Group	Subcatchment Numbers
0.000	HSG A	
0.000	HSG B	
64.727	HSG C	1S, 2S, 3S, 4S
0.000	HSG D	
0.000	Other	
64.727		TOTAL AREA

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 4

Ground Covers (all nodes)

HSG-A (acres)	HSG-B (acres)	HSG-C (acres)	HSG-D (acres)	Other (acres)	Total (acres)	Ground Cover	Subcatchment Numbers
0.000	0.000	64.727	0.000	0.000	64.727	Woods, Fair	1S, 2S, 3S, 4S
0.000	0.000	64.727	0.000	0.000	64.727	TOTAL AREA	

21-153 Pre-DevelopmentR1*Type III 24-hr 2YR Rainfall=3.13"*

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 5

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: E-1

Runoff Area=1,556,029 sf 0.00% Impervious Runoff Depth>0.84"
Flow Length=1,100' Tc=27.3 min CN=73 Runoff=21.48 cfs 2.513 af

Subcatchment 2S: E-2

Runoff Area=564,741 sf 0.00% Impervious Runoff Depth>0.85"
Flow Length=1,216' Tc=24.2 min CN=73 Runoff=8.21 cfs 0.914 af

Subcatchment 3S: E-3

Runoff Area=562,601 sf 0.00% Impervious Runoff Depth>0.84"
Flow Length=1,000' Tc=26.9 min CN=73 Runoff=7.82 cfs 0.909 af

Subcatchment 4S: E-4

Runoff Area=136,140 sf 0.00% Impervious Runoff Depth>0.85"
Flow Length=386' Tc=18.9 min CN=73 Runoff=2.18 cfs 0.221 af

Reach IP1: POND

Inflow=29.57 cfs 3.427 af
Outflow=29.57 cfs 3.427 af

Reach IP2: WETLANDS

Inflow=9.75 cfs 1.130 af
Outflow=9.75 cfs 1.130 af

Total Runoff Area = 64.727 ac Runoff Volume = 4.557 af Average Runoff Depth = 0.84"
100.00% Pervious = 64.727 ac 0.00% Impervious = 0.000 ac

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 6

Summary for Subcatchment 1S: E-1

Runoff = 21.48 cfs @ 12.42 hrs, Volume= 2.513 af, Depth> 0.84"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
1,556,029	73	Woods, Fair, HSG C
1,556,029		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
12.4	1,050	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
27.3	1,100	Total			

Subcatchment 1S: E-1

Hydrograph

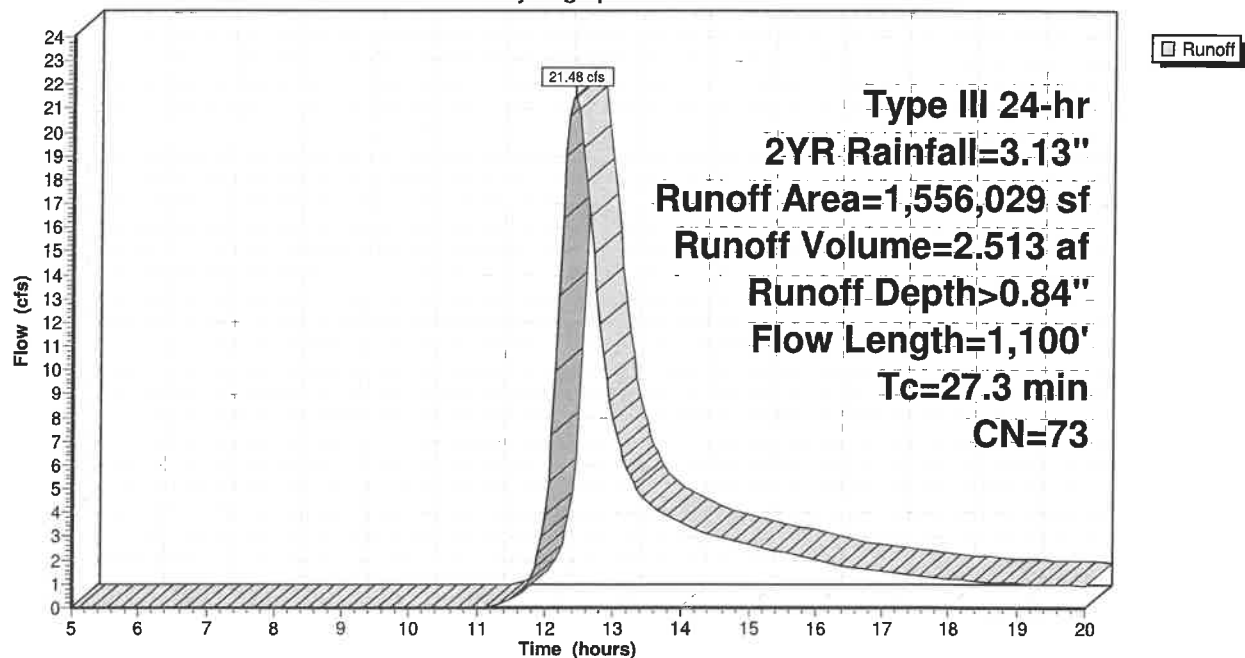

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 7

Summary for Subcatchment 2S: E-2

Runoff = 8.21 cfs @ 12.37 hrs, Volume= 0.914 af, Depth> 0.85"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
564,741	73	Woods, Fair, HSG C
564,741		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
9.3	1,166	0.0900	2.10		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Short Grass Pasture Kv= 7.0 fps
24.2	1,216	Total			

Subcatchment 2S: E-2

Hydrograph

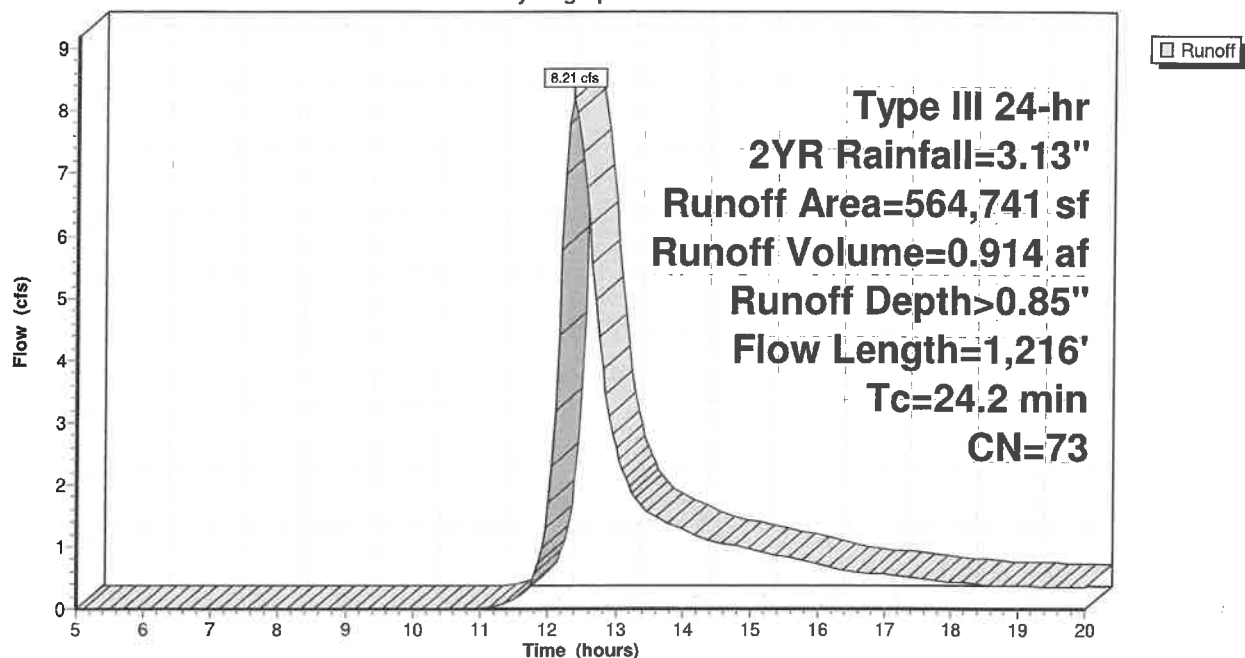

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 8

Summary for Subcatchment 3S: E-3

Runoff = 7.82 cfs @ 12.41 hrs, Volume= 0.909 af, Depth> 0.84"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
562,601	73	Woods, Fair, HSG C
562,601		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
16.3	50	0.0400	0.05		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
10.6	950	0.0900	1.50		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
26.9	1,000	Total			

Subcatchment 3S: E-3

Hydrograph

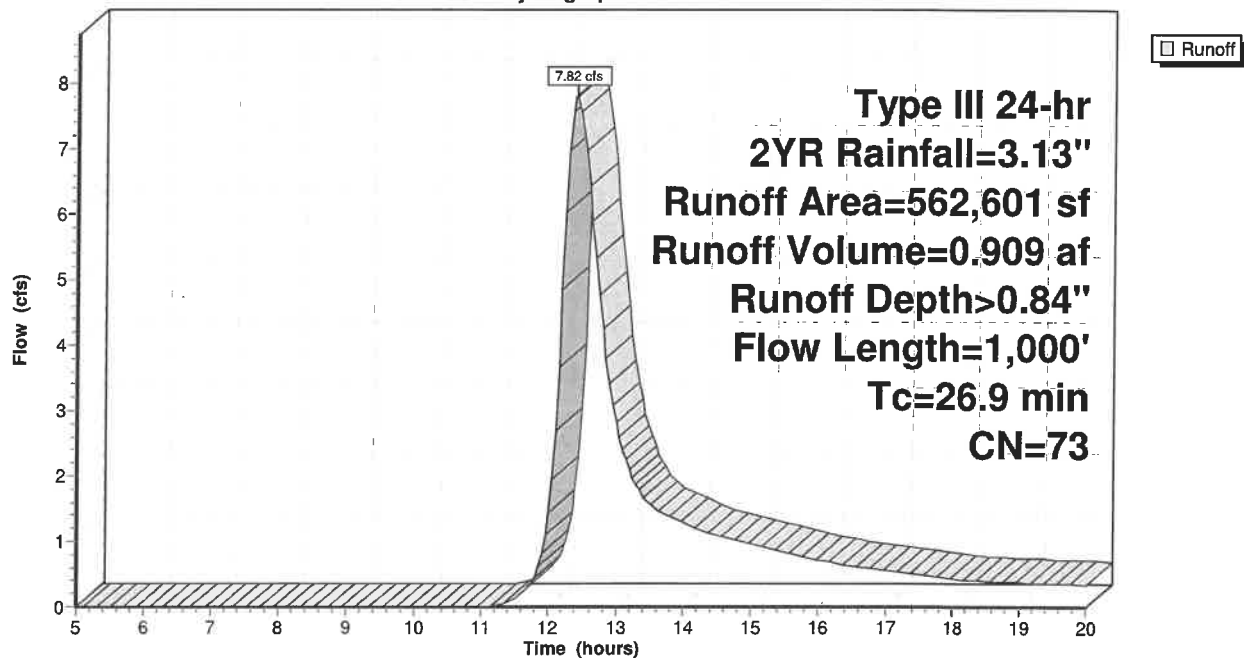

21-153 Pre-DevelopmentR1

Type III 24-hr 2YR Rainfall=3.13"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 9

Summary for Subcatchment 4S: E-4

Runoff = 2.18 cfs @ 12.29 hrs, Volume= 0.221 af, Depth> 0.85"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 2YR Rainfall=3.13"

Area (sf)	CN	Description
136,140	73	Woods, Fair, HSG C
136,140		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
4.0	336	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
18.9	386	Total			

Subcatchment 4S: E-4

Hydrograph

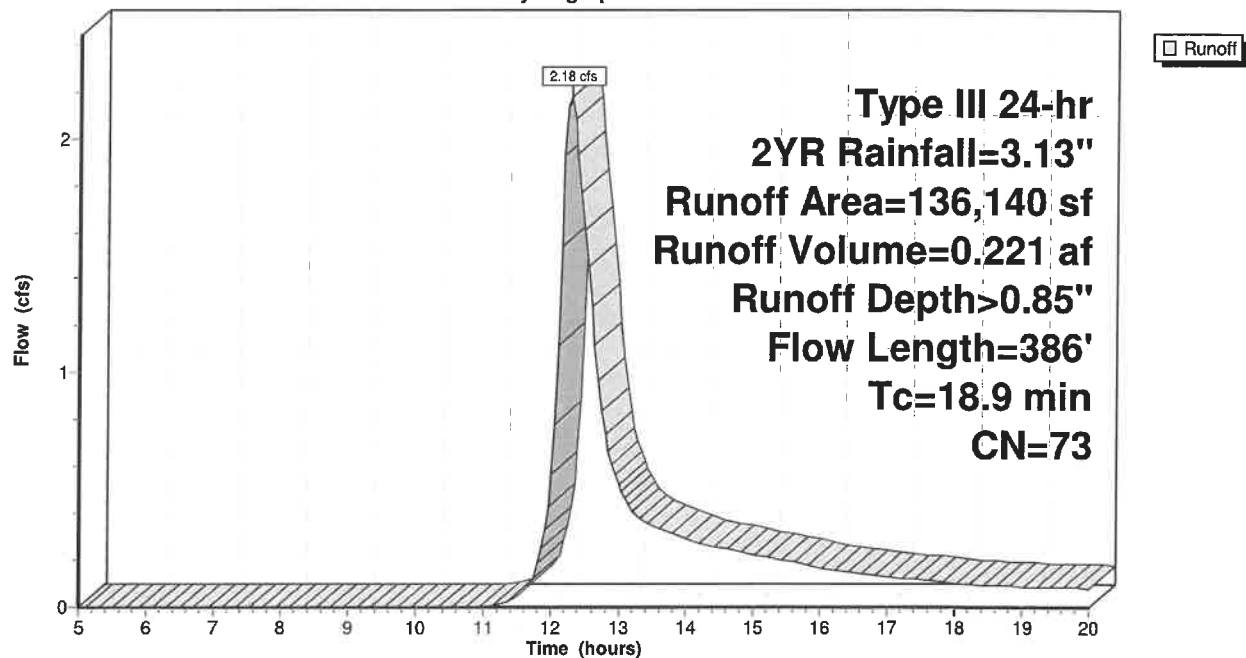

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 2YR Rainfall=3.13"

Printed 2/21/2023

Page 10


Summary for Reach IP1: POND

Inflow Area = 48.686 ac, 0.00% Impervious, Inflow Depth > 0.84" for 2YR event
Inflow = 29.57 cfs @ 12.41 hrs, Volume= 3.427 af
Outflow = 29.57 cfs @ 12.41 hrs, Volume= 3.427 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP1: POND

Hydrograph

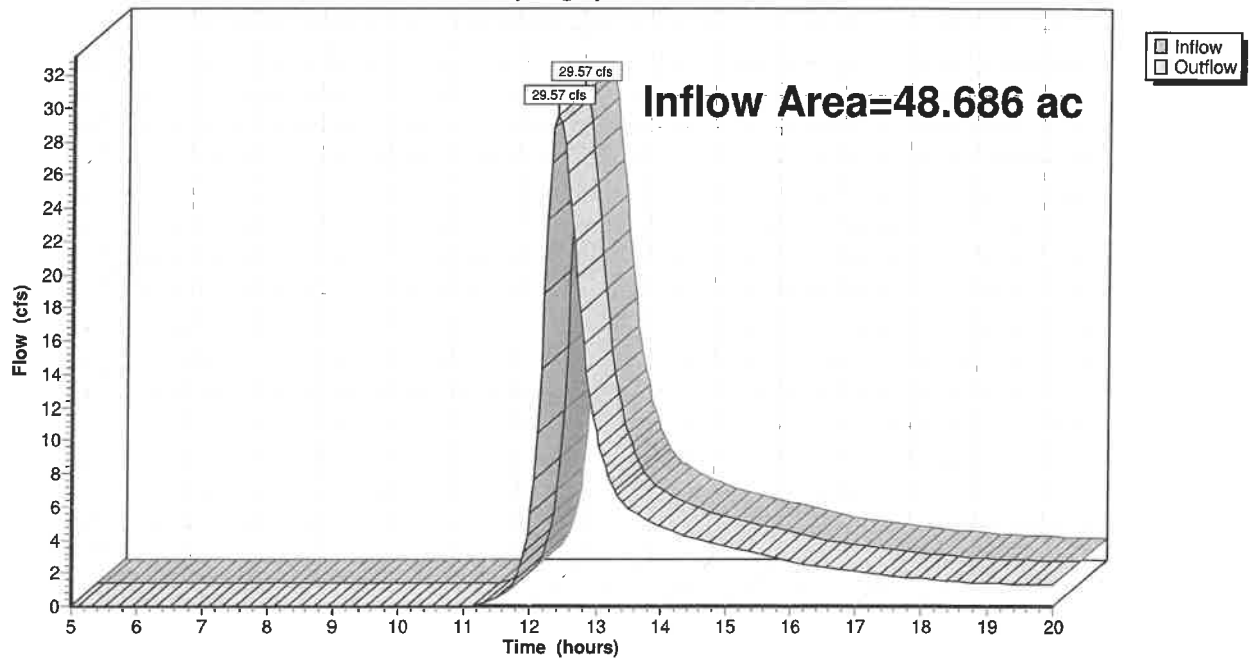


Summary for Reach IP2: WETLANDS

Inflow Area = 16.041 ac, 0.00% Impervious, Inflow Depth > 0.85" for 2YR event
Inflow = 9.75 cfs @ 12.39 hrs, Volume= 1.130 af
Outflow = 9.75 cfs @ 12.39 hrs, Volume= 1.130 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP2: WETLANDS

Hydrograph

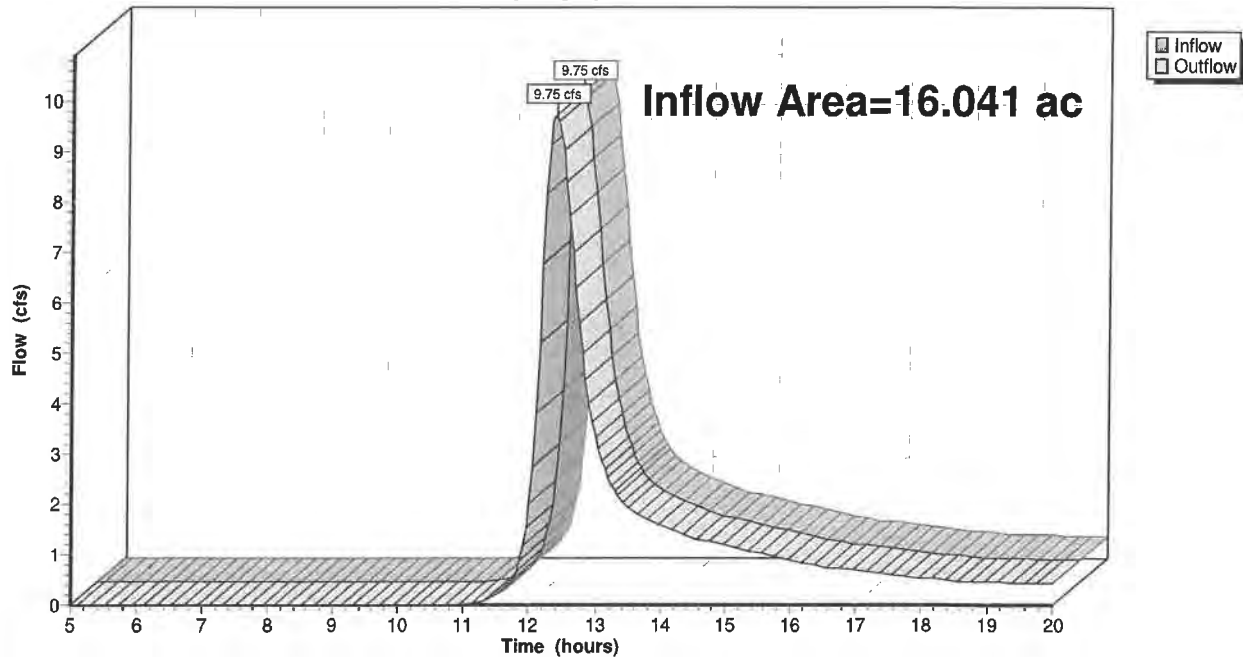

21-153 Pre-DevelopmentR1*Type III 24-hr 10YR Rainfall=4.85"*

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 12

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: E-1

Runoff Area=1,556,029 sf 0.00% Impervious Runoff Depth>1.98"
Flow Length=1,100' Tc=27.3 min CN=73 Runoff=52.70 cfs 5.904 af

Subcatchment 2S: E-2

Runoff Area=564,741 sf 0.00% Impervious Runoff Depth>1.99"
Flow Length=1,216' Tc=24.2 min CN=73 Runoff=20.17 cfs 2.145 af

Subcatchment 3S: E-3

Runoff Area=562,601 sf 0.00% Impervious Runoff Depth>1.98"
Flow Length=1,000' Tc=26.9 min CN=73 Runoff=19.18 cfs 2.135 af

Subcatchment 4S: E-4

Runoff Area=136,140 sf 0.00% Impervious Runoff Depth>1.99"
Flow Length=386' Tc=18.9 min CN=73 Runoff=5.39 cfs 0.518 af

Reach IP1: POND

Inflow=72.58 cfs 8.049 af
Outflow=72.58 cfs 8.049 af

Reach IP2: WETLANDS

Inflow=23.97 cfs 2.653 af
Outflow=23.97 cfs 2.653 af

Total Runoff Area = 64.727 ac Runoff Volume = 10.703 af Average Runoff Depth = 1.98"
100.00% Pervious = 64.727 ac 0.00% Impervious = 0.000 ac

21-153 Pre-DevelopmentR1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 13

Summary for Subcatchment 1S: E-1

Runoff = 52.70 cfs @ 12.39 hrs, Volume= 5.904 af, Depth> 1.98"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
1,556,029	73	Woods, Fair, HSG C
1,556,029		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
12.4	1,050	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
27.3	1,100	Total			

Subcatchment 1S: E-1

Hydrograph

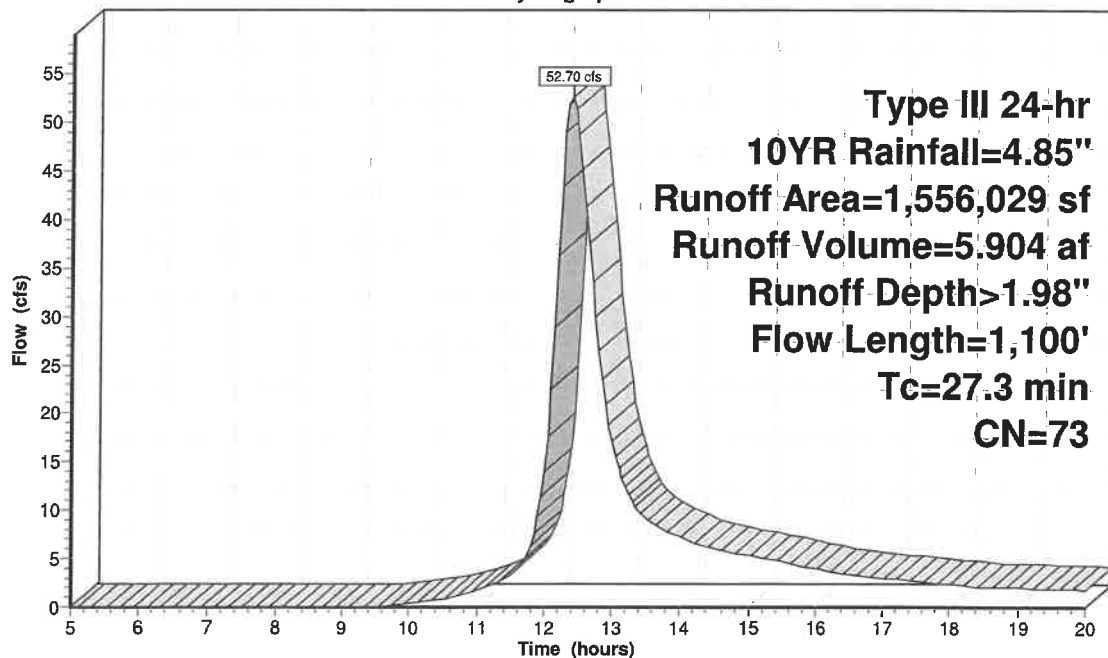

21-153 Pre-DevelopmentR1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 14

Summary for Subcatchment 2S: E-2

Runoff = 20.17 cfs @ 12.35 hrs, Volume= 2.145 af, Depth> 1.99"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
564,741	73	Woods, Fair, HSG C
564,741		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
9.3	1,166	0.0900	2.10		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Short Grass Pasture Kv= 7.0 fps
24.2	1,216	Total			

Subcatchment 2S: E-2

Hydrograph

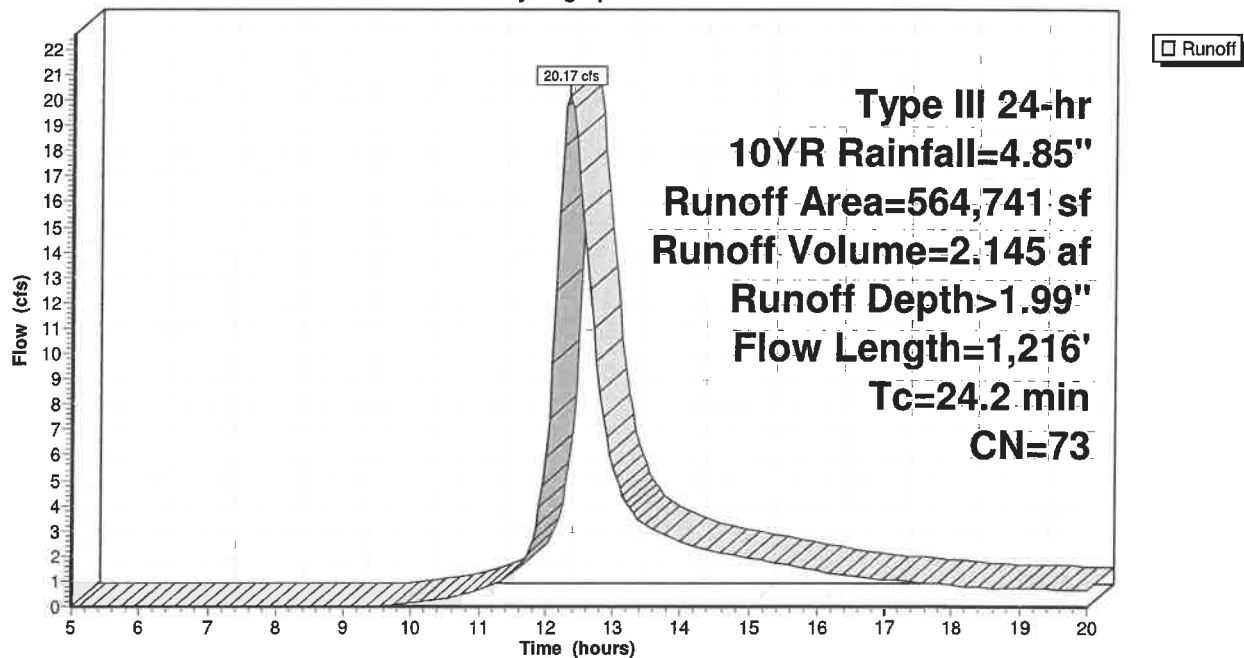

21-153 Pre-DevelopmentR1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 15

Summary for Subcatchment 3S: E-3

Runoff = 19.18 cfs @ 12.39 hrs, Volume= 2.135 af, Depth> 1.98"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
562,601	73	Woods, Fair, HSG C
562,601		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
16.3	50	0.0400	0.05		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
10.6	950	0.0900	1.50		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
26.9	1,000	Total			

Subcatchment 3S: E-3

Hydrograph

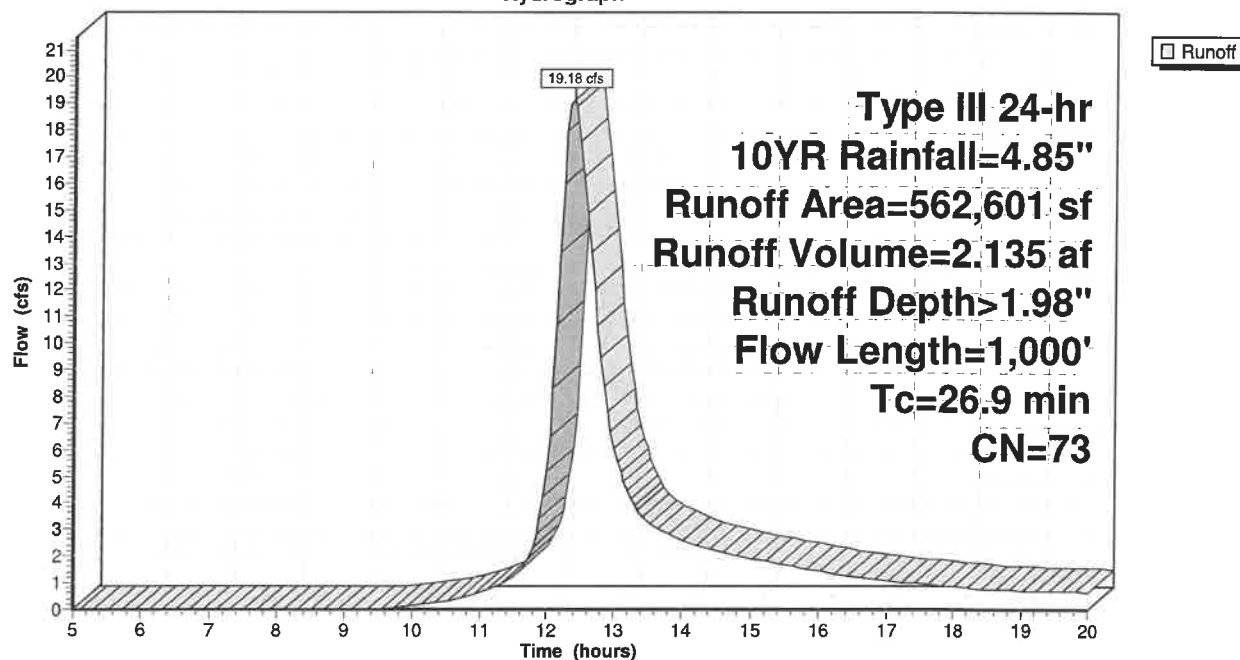

21-153 Pre-DevelopmentR1

Type III 24-hr 10YR Rainfall=4.85"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 16

Summary for Subcatchment 4S: E-4

Runoff = 5.39 cfs @ 12.27 hrs, Volume= 0.518 af, Depth> 1.99"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10YR Rainfall=4.85"

Area (sf)	CN	Description
136,140	73	Woods, Fair, HSG C
136,140		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
4.0	336	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
18.9	386	Total			

Subcatchment 4S: E-4

Hydrograph

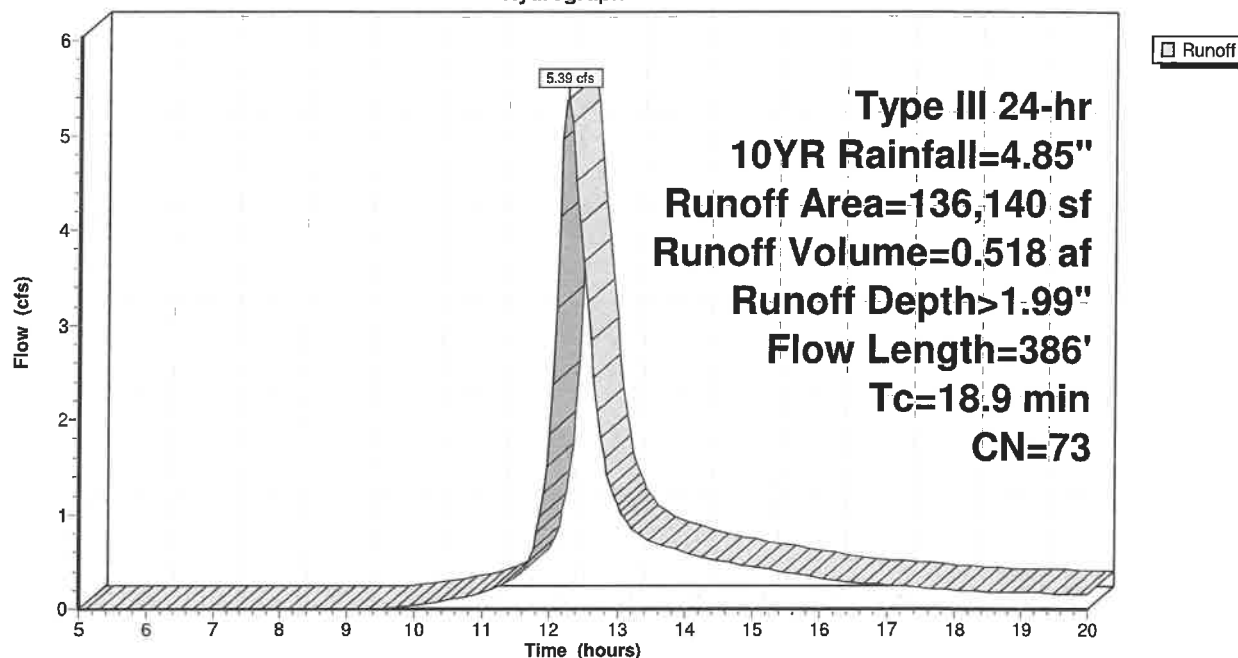


Summary for Reach IP1: POND

Inflow Area = 48.686 ac, 0.00% Impervious, Inflow Depth > 1.98" for 10YR event
Inflow = 72.58 cfs @ 12.38 hrs, Volume= 8.049 af
Outflow = 72.58 cfs @ 12.38 hrs, Volume= 8.049 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP1: POND


Hydrograph

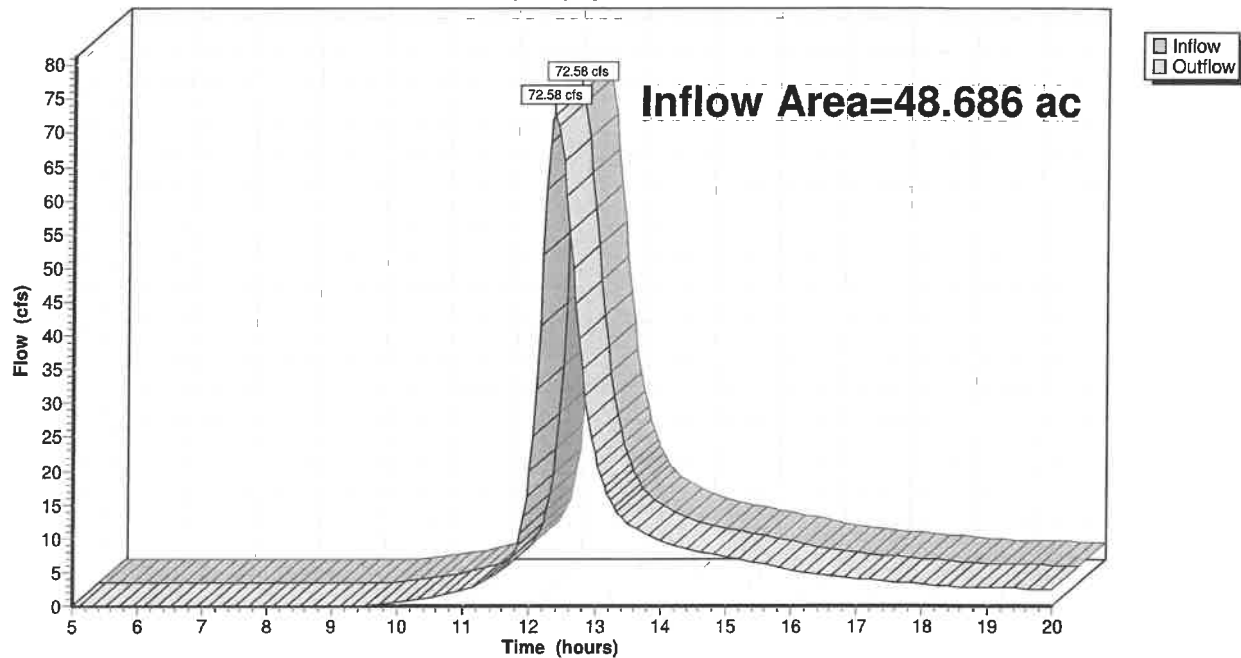

Summary for Reach IP2: WETLANDS

Inflow Area = 16.041 ac, 0.00% Impervious, Inflow Depth > 1.98" for 10YR event
Inflow = 23.97 cfs @ 12.36 hrs, Volume= 2.653 af
Outflow = 23.97 cfs @ 12.36 hrs, Volume= 2.653 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

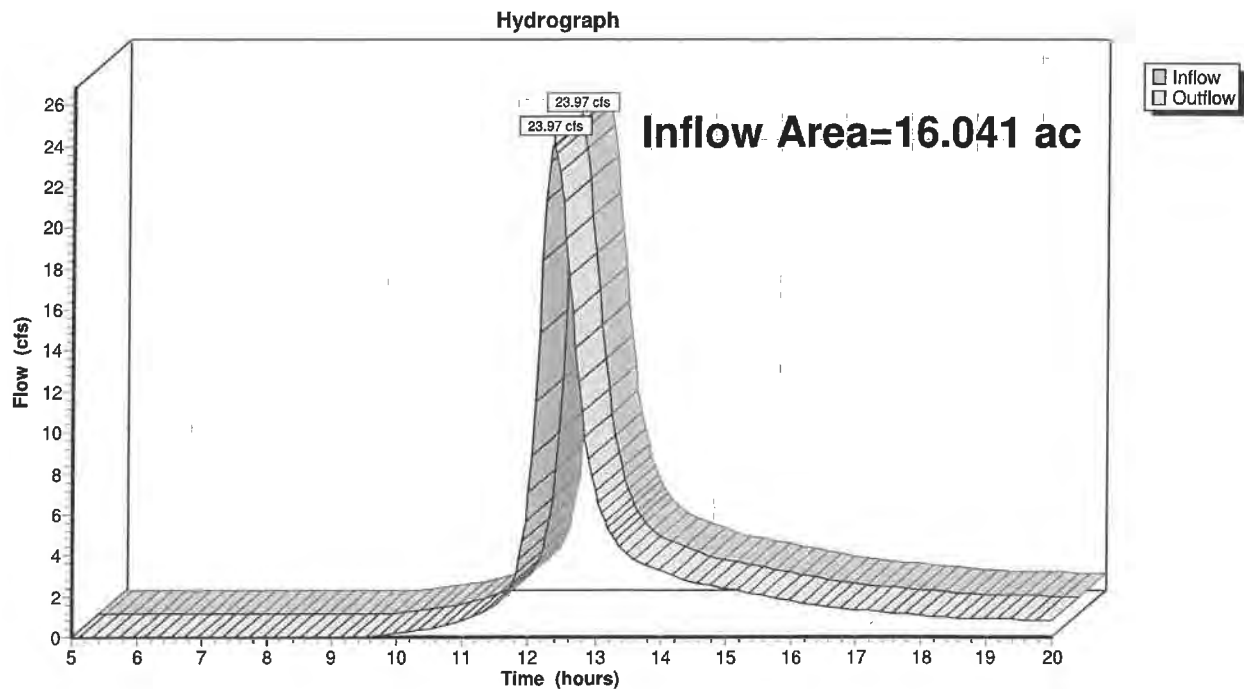Reach IP2: WETLANDS

21-153 Pre-DevelopmentR1*Type III 24-hr 25YR Rainfall=6.10"*

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 19

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: E-1

Runoff Area=1,556,029 sf 0.00% Impervious Runoff Depth>2.93"
Flow Length=1,100' Tc=27.3 min CN=73 Runoff=78.04 cfs 8.716 af

Subcatchment 2S: E-2

Runoff Area=564,741 sf 0.00% Impervious Runoff Depth>2.93"
Flow Length=1,216' Tc=24.2 min CN=73 Runoff=29.86 cfs 3.167 af

Subcatchment 3S: E-3

Runoff Area=562,601 sf 0.00% Impervious Runoff Depth>2.93"
Flow Length=1,000' Tc=26.9 min CN=73 Runoff=28.40 cfs 3.152 af

Subcatchment 4S: E-4

Runoff Area=136,140 sf 0.00% Impervious Runoff Depth>2.94"
Flow Length=386' Tc=18.9 min CN=73 Runoff=7.99 cfs 0.765 af

Reach IP1: POND

Inflow=107.63 cfs 11.882 af
Outflow=107.63 cfs 11.882 af

Reach IP2: WETLANDS

Inflow=35.51 cfs 3.917 af
Outflow=35.51 cfs 3.917 af

Total Runoff Area = 64.727 ac Runoff Volume = 15.799 af Average Runoff Depth = 2.93"
100.00% Pervious = 64.727 ac 0.00% Impervious = 0.000 ac

21-153 Pre-DevelopmentR1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 20

Summary for Subcatchment 1S: E-1

Runoff = 78.04 cfs @ 12.38 hrs, Volume= 8.716 af, Depth> 2.93"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs


Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
1,556,029	73	Woods, Fair, HSG C
1,556,029		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
12.4	1,050	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
27.3	1,100	Total			

Subcatchment 1S: E-1

Hydrograph

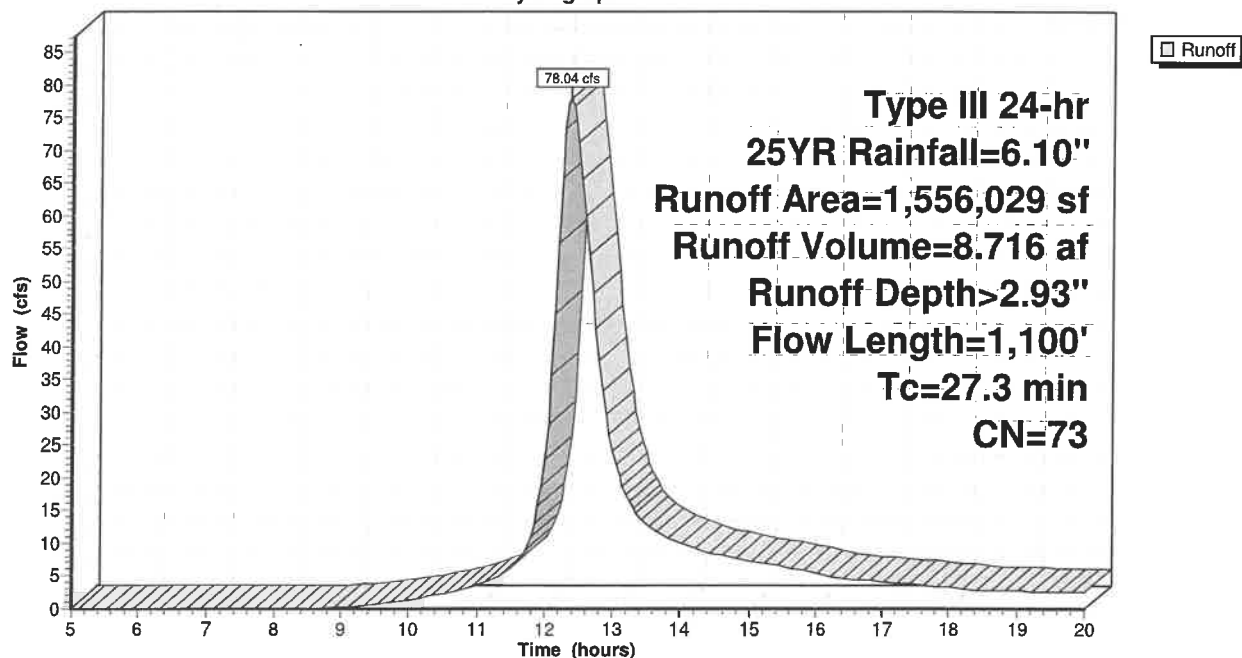

21-153 Pre-DevelopmentR1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 21

Summary for Subcatchment 2S: E-2

Runoff = 29.86 cfs @ 12.34 hrs, Volume= 3.167 af, Depth> 2.93"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
564,741	73	Woods, Fair, HSG C
564,741		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
9.3	1,166	0.0900	2.10		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Short Grass Pasture Kv= 7.0 fps
24.2	1,216	Total			

Subcatchment 2S: E-2

Hydrograph

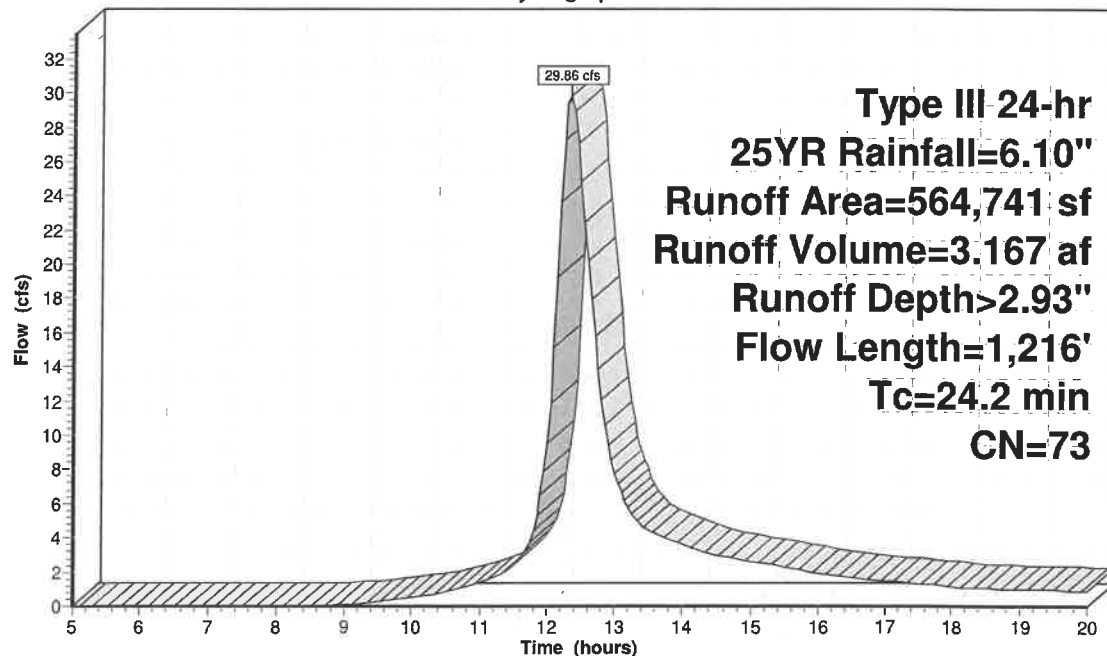

21-153 Pre-DevelopmentR1

Prepared by {enter your company name here}

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Type III 24-hr 25YR Rainfall=6.10"

Printed 2/21/2023

Page 22

Summary for Subcatchment 3S: E-3

Runoff = 28.40 cfs @ 12.38 hrs, Volume= 3.152 af, Depth> 2.93"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
562,601	73	Woods, Fair, HSG C
562,601		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
16.3	50	0.0400	0.05		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
10.6	950	0.0900	1.50		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
26.9	1,000	Total			

Subcatchment 3S: E-3

Hydrograph

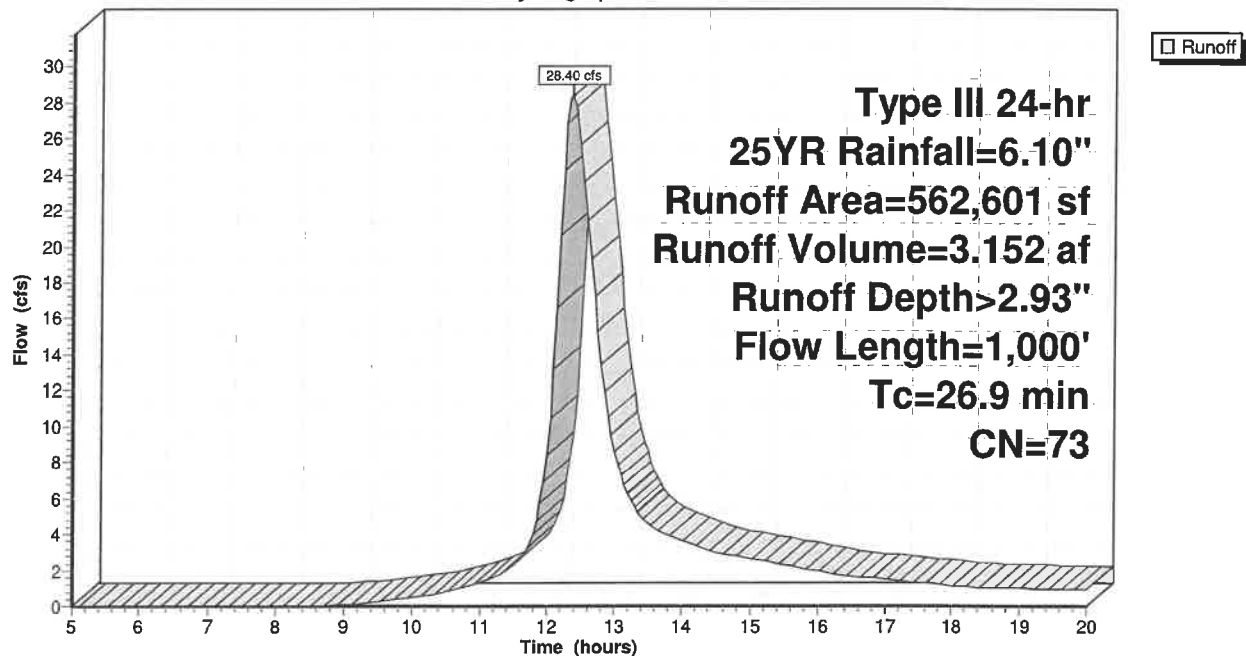

21-153 Pre-DevelopmentR1

Type III 24-hr 25YR Rainfall=6.10"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 23

Summary for Subcatchment 4S: E-4

Runoff = 7.99 cfs @ 12.26 hrs, Volume= 0.765 af, Depth> 2.94"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25YR Rainfall=6.10"

Area (sf)	CN	Description
136,140	73	Woods, Fair, HSG C
136,140		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
4.0	336	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
18.9	386	Total			

Subcatchment 4S: E-4

Hydrograph

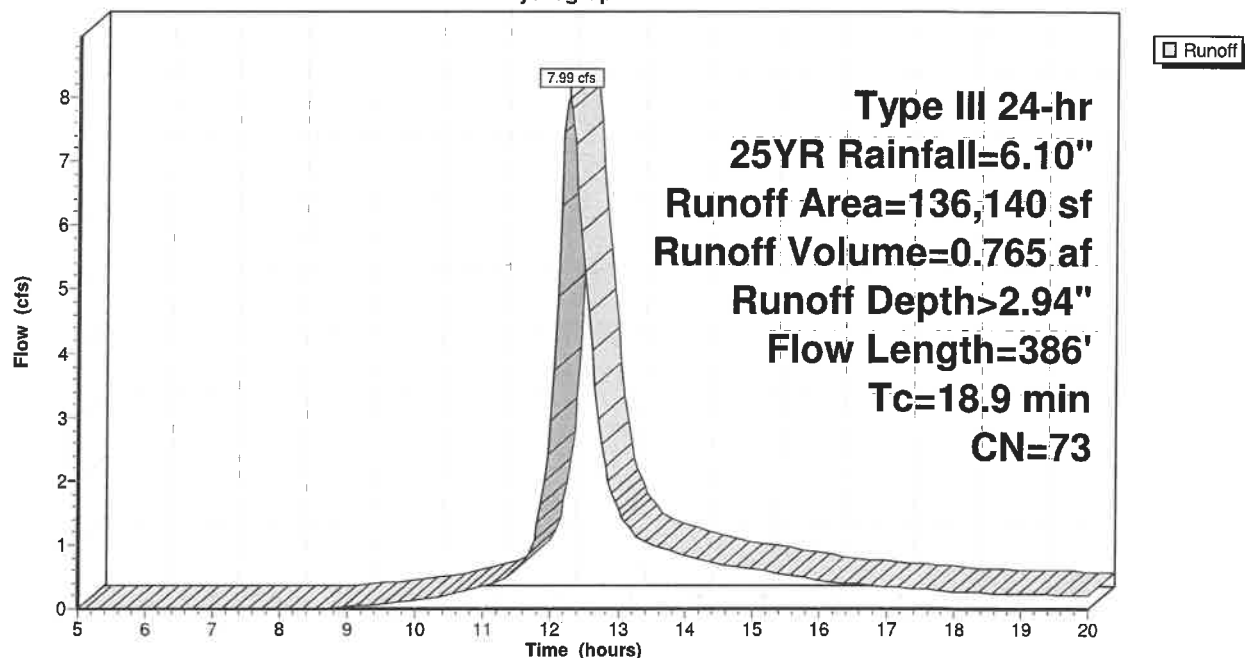


Summary for Reach IP1: POND

Inflow Area = 48.686 ac, 0.00% Impervious, Inflow Depth > 2.93" for 25YR event
Inflow = 107.63 cfs @ 12.37 hrs, Volume= 11.882 af
Outflow = 107.63 cfs @ 12.37 hrs, Volume= 11.882 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP1: POND


Hydrograph

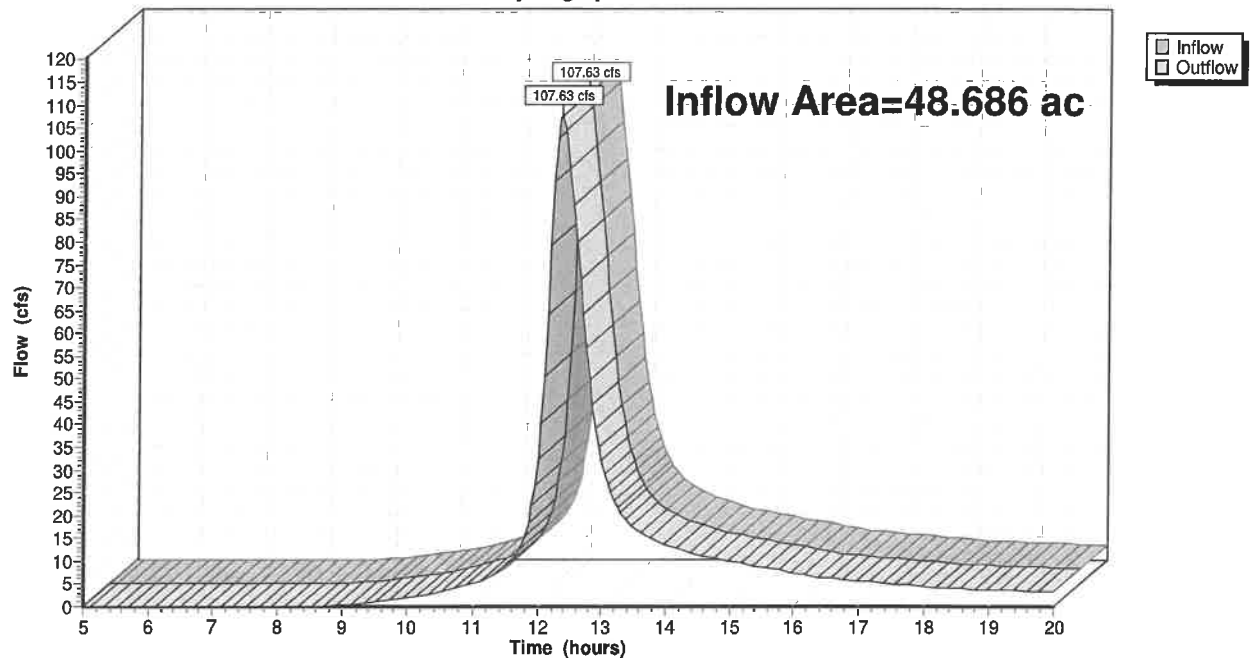

Summary for Reach IP2: WETLANDS

Inflow Area = 16.041 ac, 0.00% Impervious, Inflow Depth > 2.93" for 25YR event
Inflow = 35.51 cfs @ 12.35 hrs, Volume= 3.917 af
Outflow = 35.51 cfs @ 12.35 hrs, Volume= 3.917 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

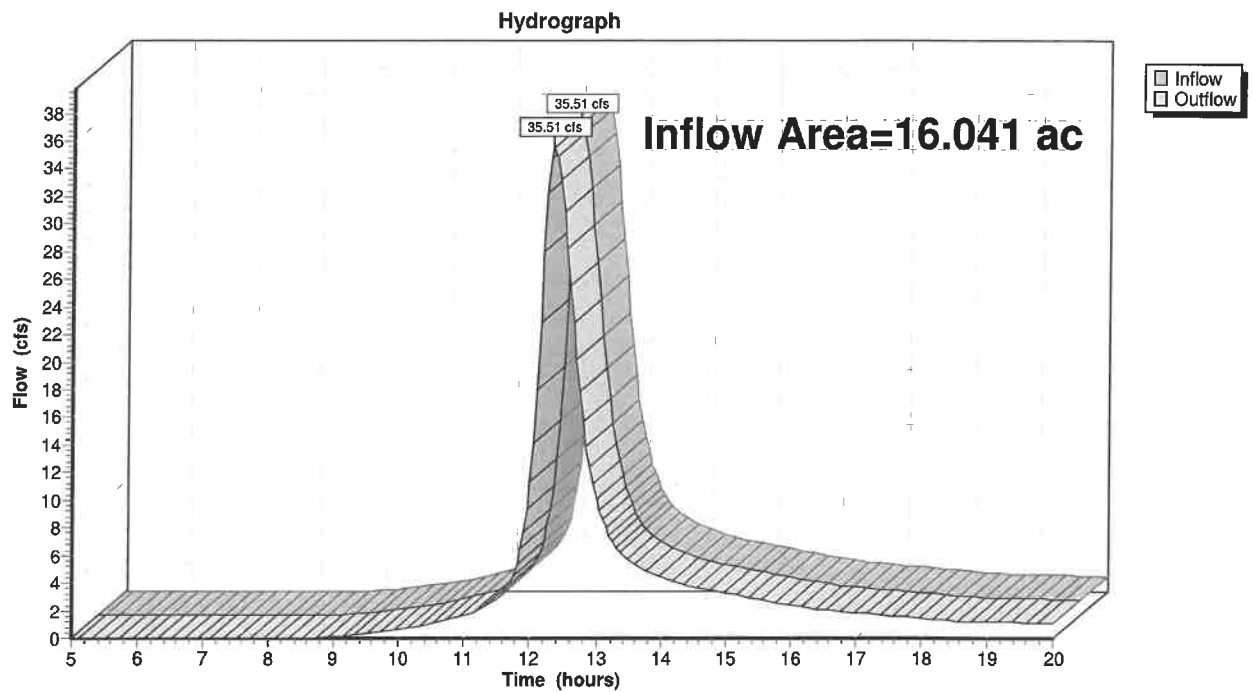Reach IP2: WETLANDS

21-153 Pre-DevelopmentR1*Type III 24-hr 50YR Rainfall=6.72"*

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 26

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: E-1

Runoff Area=1,556,029 sf 0.00% Impervious Runoff Depth>3.42"
Flow Length=1,100' Tc=27.3 min CN=73 Runoff=91.05 cfs 10.179 af

Subcatchment 2S: E-2

Runoff Area=564,741 sf 0.00% Impervious Runoff Depth>3.42"
Flow Length=1,216' Tc=24.2 min CN=73 Runoff=34.84 cfs 3.698 af

Subcatchment 3S: E-3

Runoff Area=562,601 sf 0.00% Impervious Runoff Depth>3.42"
Flow Length=1,000' Tc=26.9 min CN=73 Runoff=33.14 cfs 3.681 af

Subcatchment 4S: E-4

Runoff Area=136,140 sf 0.00% Impervious Runoff Depth>3.43"
Flow Length=386' Tc=18.9 min CN=73 Runoff=9.32 cfs 0.893 af

Reach IP1: POND

Inflow=125.59 cfs 13.877 af
Outflow=125.59 cfs 13.877 af

Reach IP2: WETLANDS

Inflow=41.44 cfs 4.574 af
Outflow=41.44 cfs 4.574 af

Total Runoff Area = 64.727 ac Runoff Volume = 18.451 af Average Runoff Depth = 3.42"
100.00% Pervious = 64.727 ac 0.00% Impervious = 0.000 ac

21-153 Pre-DevelopmentR1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 27

Summary for Subcatchment 1S: E-1

Runoff = 91.05 cfs @ 12.38 hrs, Volume= 10.179 af, Depth> 3.42"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
1,556,029	73	Woods, Fair, HSG C
1,556,029		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
12.4	1,050	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
27.3	1,100	Total			

Subcatchment 1S: E-1

Hydrograph

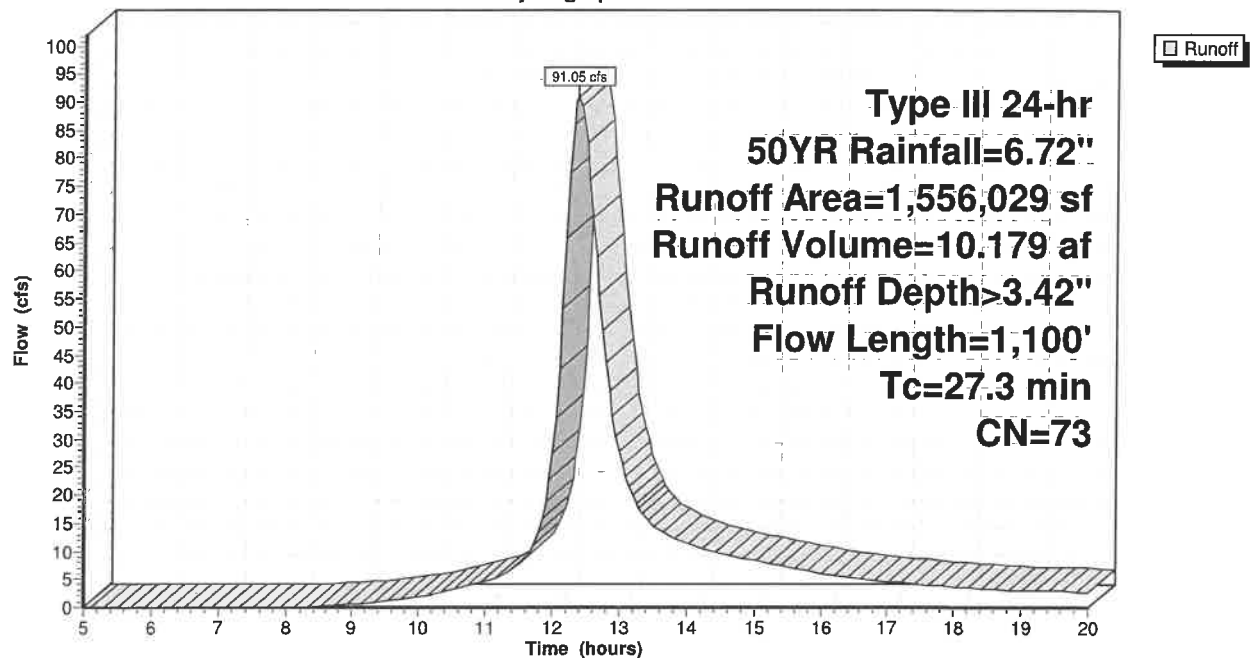

21-153 Pre-DevelopmentR1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 28

Summary for Subcatchment 2S: E-2

Runoff = 34.84 cfs @ 12.34 hrs, Volume= 3.698 af, Depth> 3.42"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
564,741	73	Woods, Fair, HSG C
564,741		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
9.3	1,166	0.0900	2.10		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Short Grass Pasture Kv= 7.0 fps
24.2	1,216	Total			

Subcatchment 2S: E-2

Hydrograph

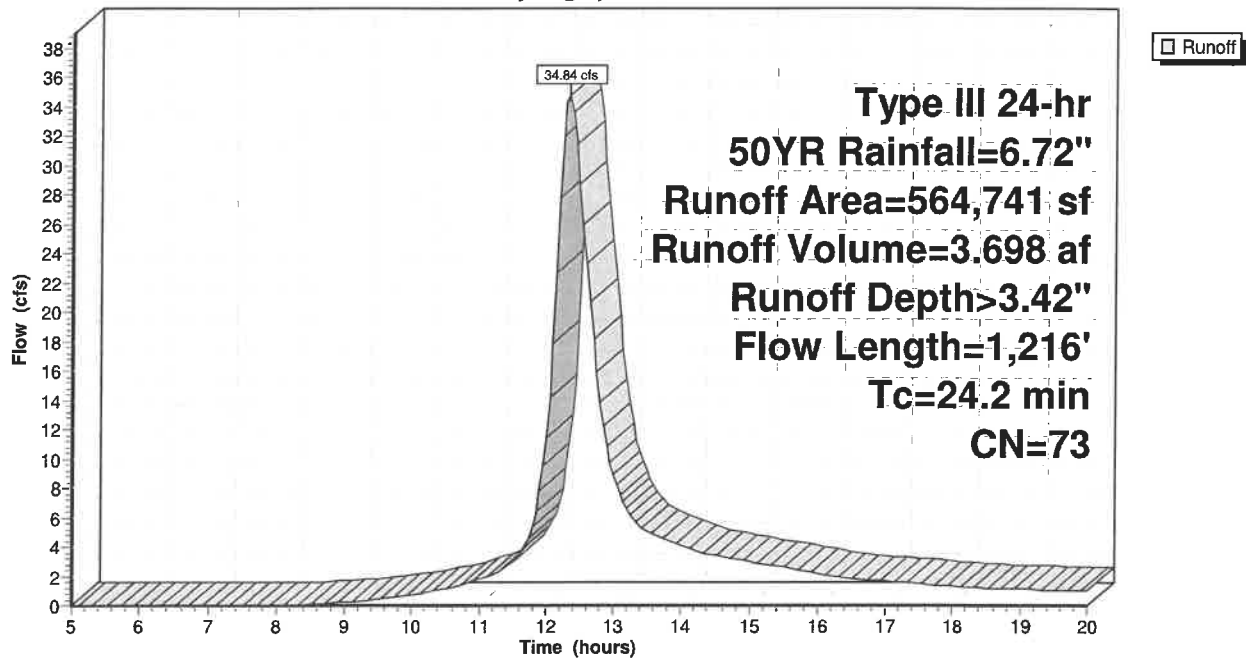

21-153 Pre-DevelopmentR1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 29

Summary for Subcatchment 3S: E-3

Runoff = 33.14 cfs @ 12.38 hrs, Volume= 3.681 af, Depth> 3.42"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
562,601	73	Woods, Fair, HSG C
562,601		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
16.3	50	0.0400	0.05		Sheet Flow, TRAVEL PATH A TO B
					Woods: Dense underbrush n= 0.800 P2= 3.20"
10.6	950	0.0900	1.50		Shallow Concentrated Flow, TRAVEL PATH B TO C
					Woodland Kv= 5.0 fps
26.9	1,000	Total			

Subcatchment 3S: E-3

Hydrograph

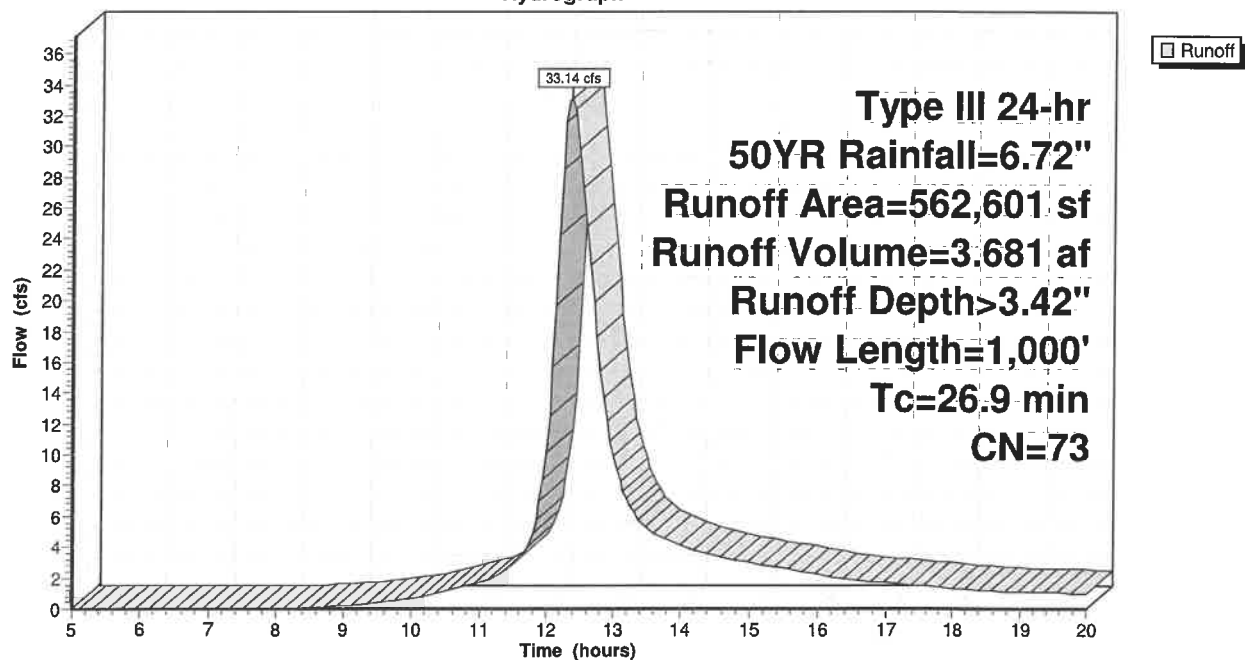

21-153 Pre-DevelopmentR1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 30

Summary for Subcatchment 4S: E-4

Runoff = 9.32 cfs @ 12.26 hrs, Volume= 0.893 af, Depth> 3.43"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 50YR Rainfall=6.72"

Area (sf)	CN	Description
136,140	73	Woods, Fair, HSG C
136,140		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
4.0	336	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
18.9	386	Total			

Subcatchment 4S: E-4

Hydrograph

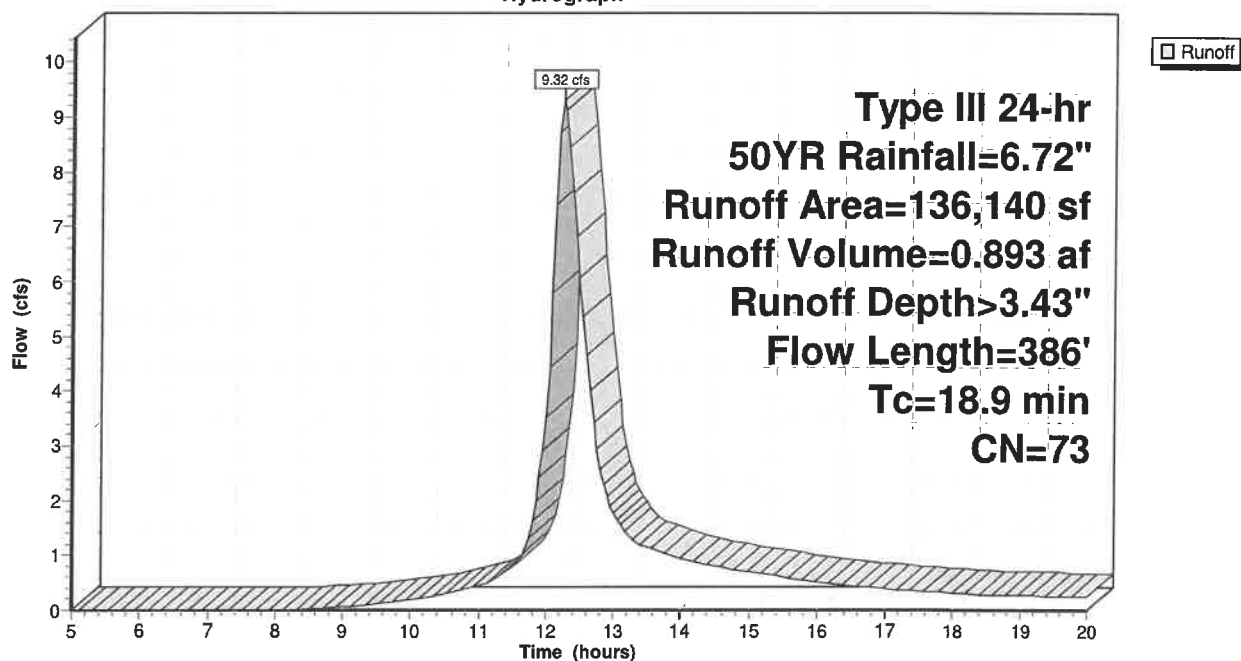

21-153 Pre-DevelopmentR1

Type III 24-hr 50YR Rainfall=6.72"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 31


Summary for Reach IP1: POND

Inflow Area = 48.686 ac, 0.00% Impervious, Inflow Depth > 3.42" for 50YR event
Inflow = 125.59 cfs @ 12.37 hrs, Volume= 13.877 af
Outflow = 125.59 cfs @ 12.37 hrs, Volume= 13.877 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP1: POND


Hydrograph

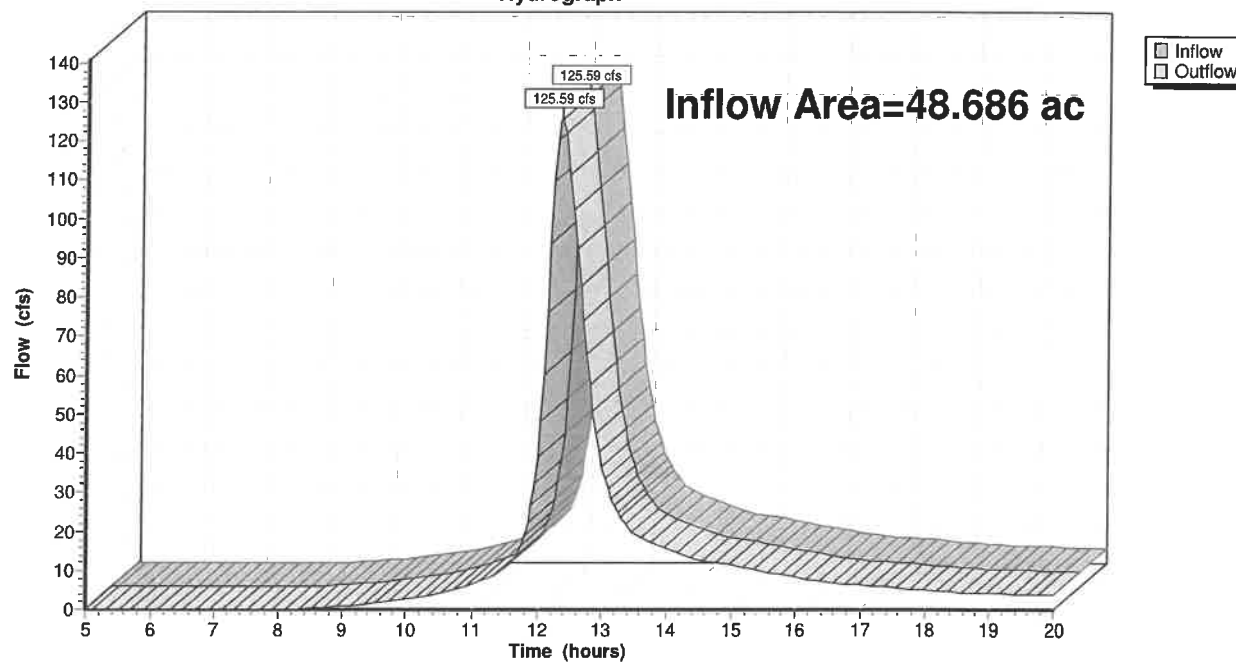

Summary for Reach IP2: WETLANDS

Inflow Area = 16.041 ac, 0.00% Impervious, Inflow Depth > 3.42" for 50YR event
Inflow = 41.44 cfs @ 12.35 hrs, Volume= 4.574 af
Outflow = 41.44 cfs @ 12.35 hrs, Volume= 4.574 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

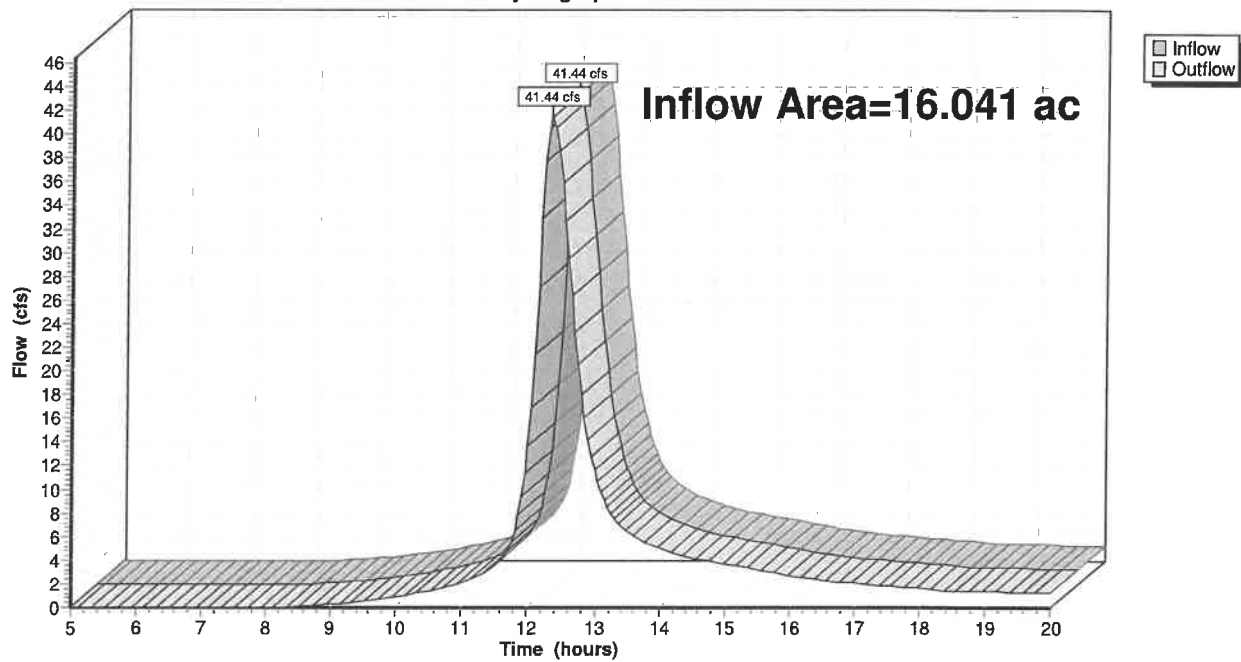Reach IP2: WETLANDS**Hydrograph**

21-153 Pre-DevelopmentR1*Type III 24-hr 100YR Rainfall=7.59"*

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 33

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: E-1

Runoff Area=1,556,029 sf 0.00% Impervious Runoff Depth>4.13"
Flow Length=1,100' Tc=27.3 min CN=73 Runoff=109.64 cfs 12.290 af

Subcatchment 2S: E-2

Runoff Area=564,741 sf 0.00% Impervious Runoff Depth>4.13"
Flow Length=1,216' Tc=24.2 min CN=73 Runoff=41.95 cfs 4.465 af

Subcatchment 3S: E-3

Runoff Area=562,601 sf 0.00% Impervious Runoff Depth>4.13"
Flow Length=1,000' Tc=26.9 min CN=73 Runoff=39.95 cfs 4.444 af

Subcatchment 4S: E-4

Runoff Area=136,140 sf 0.00% Impervious Runoff Depth>4.14"
Flow Length=386' Tc=18.9 min CN=73 Runoff=11.22 cfs 1.078 af

Reach IP1: POND

Inflow=151.24 cfs 16.755 af
Outflow=151.24 cfs 16.755 af

Reach IP2: WETLANDS

Inflow=49.90 cfs 5.522 af
Outflow=49.90 cfs 5.522 af

Total Runoff Area = 64.727 ac Runoff Volume = 22.277 af Average Runoff Depth = 4.13"
100.00% Pervious = 64.727 ac 0.00% Impervious = 0.000 ac

21-153 Pre-DevelopmentR1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 34

Summary for Subcatchment 1S: E-1

Runoff = 109.64 cfs @ 12.38 hrs, Volume= 12.290 af, Depth> 4.13"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
1,556,029	73	Woods, Fair, HSG C
1,556,029		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
12.4	1,050	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
27.3	1,100	Total			

Subcatchment 1S: E-1

Hydrograph

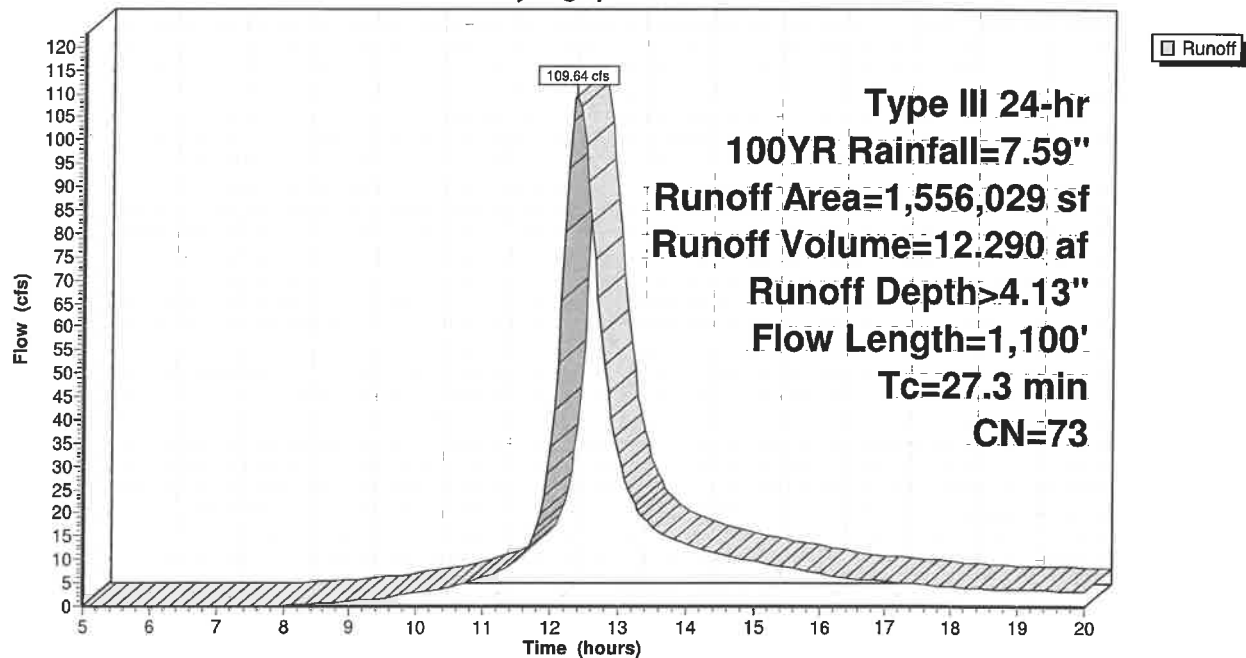

21-153 Pre-DevelopmentR1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 35

Summary for Subcatchment 2S: E-2

Runoff = 41.95 cfs @ 12.34 hrs, Volume= 4.465 af, Depth> 4.13"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
564,741	73	Woods, Fair, HSG C
564,741		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
9.3	1,166	0.0900	2.10		Shallow Concentrated Flow, TRAVEL PATH B TO C Short Grass Pasture Kv= 7.0 fps
24.2	1,216	Total			

Subcatchment 2S: E-2

Hydrograph

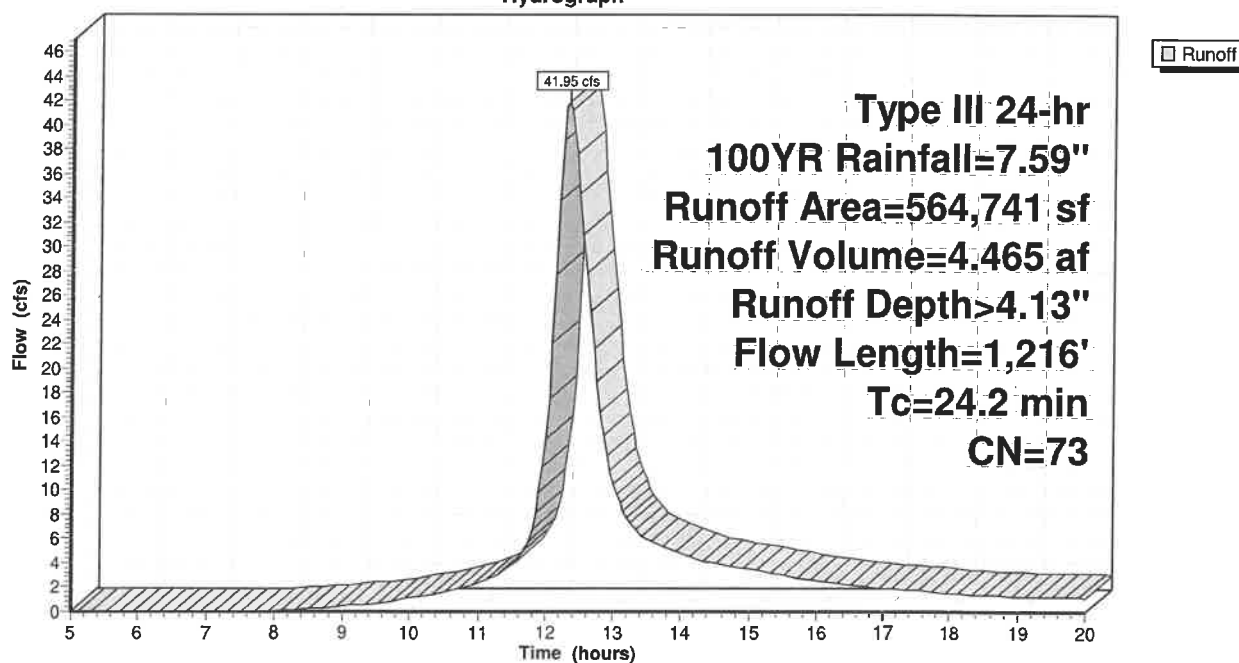

21-153 Pre-DevelopmentR1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 36

Summary for Subcatchment 3S: E-3

Runoff = 39.95 cfs @ 12.37 hrs, Volume= 4.444 af, Depth> 4.13"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
562,601	73	Woods, Fair, HSG C
562,601		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
16.3	50	0.0400	0.05		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
10.6	950	0.0900	1.50		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
26.9	1,000	Total			

Subcatchment 3S: E-3

Hydrograph

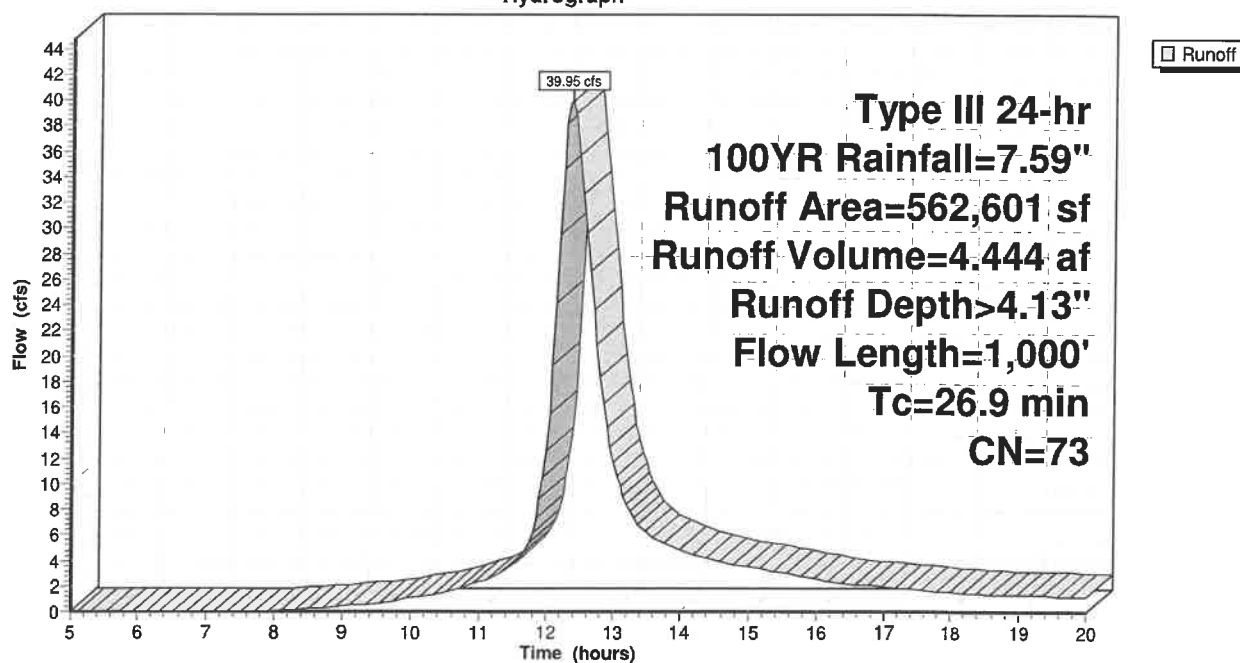

21-153 Pre-DevelopmentR1

Type III 24-hr 100YR Rainfall=7.59"

Prepared by {enter your company name here}

Printed 2/21/2023

HydroCAD® 10.00-26 s/n 09589 © 2020 HydroCAD Software Solutions LLC

Page 37

Summary for Subcatchment 4S: E-4

Runoff = 11.22 cfs @ 12.26 hrs, Volume= 1.078 af, Depth> 4.14"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100YR Rainfall=7.59"

Area (sf)	CN	Description
136,140	73	Woods, Fair, HSG C
136,140		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
14.9	50	0.0500	0.06		Sheet Flow, TRAVEL PATH A TO B Woods: Dense underbrush n= 0.800 P2= 3.20"
4.0	336	0.0800	1.41		Shallow Concentrated Flow, TRAVEL PATH B TO C Woodland Kv= 5.0 fps
18.9	386	Total			

Subcatchment 4S: E-4

Hydrograph

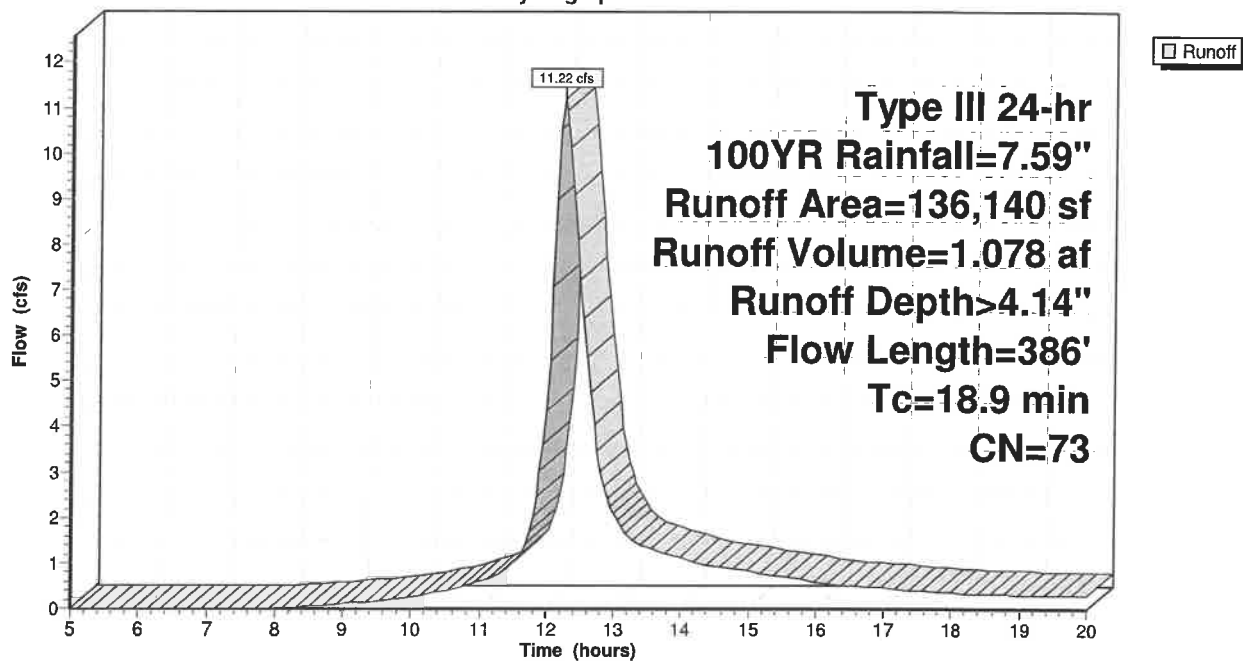


Summary for Reach IP1: POND

Inflow Area = 48.686 ac, 0.00% Impervious, Inflow Depth > 4.13" for 100YR event
Inflow = 151.24 cfs @ 12.37 hrs, Volume= 16.755 af
Outflow = 151.24 cfs @ 12.37 hrs, Volume= 16.755 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP1: POND

Hydrograph

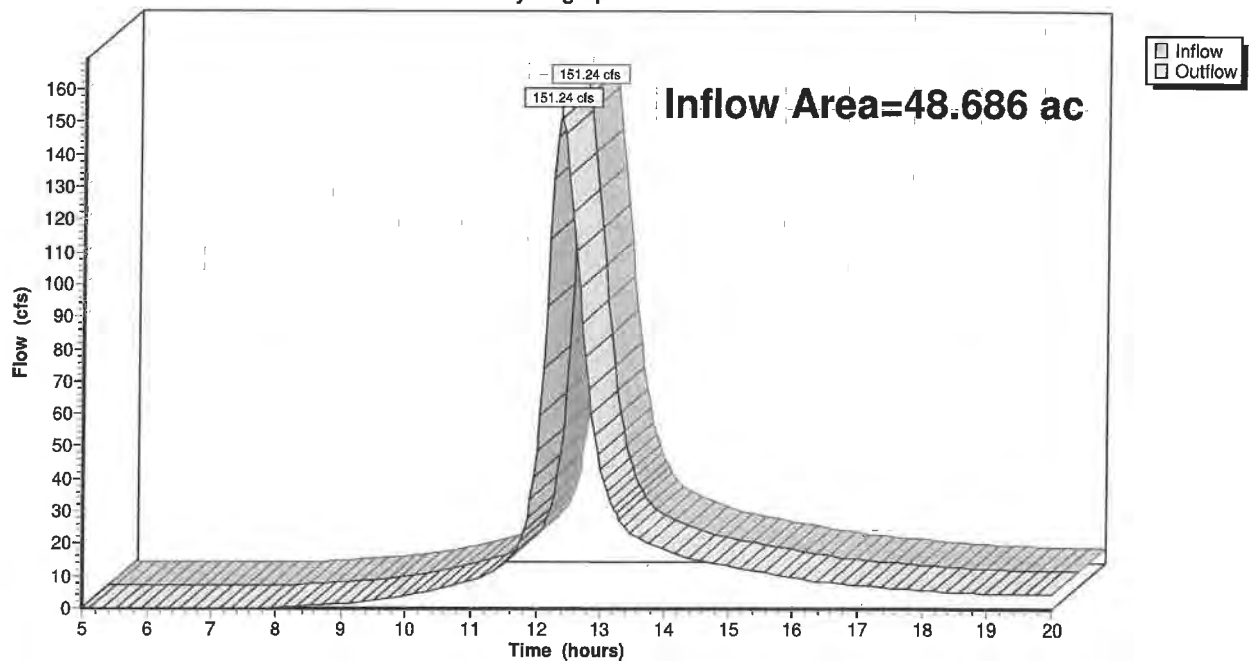


Summary for Reach IP2: WETLANDS

Inflow Area = 16.041 ac, 0.00% Impervious, Inflow Depth > 4.13" for 100YR event
Inflow = 49.90 cfs @ 12.35 hrs, Volume= 5.522 af
Outflow = 49.90 cfs @ 12.35 hrs, Volume= 5.522 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach IP2: WETLANDS

Hydrograph

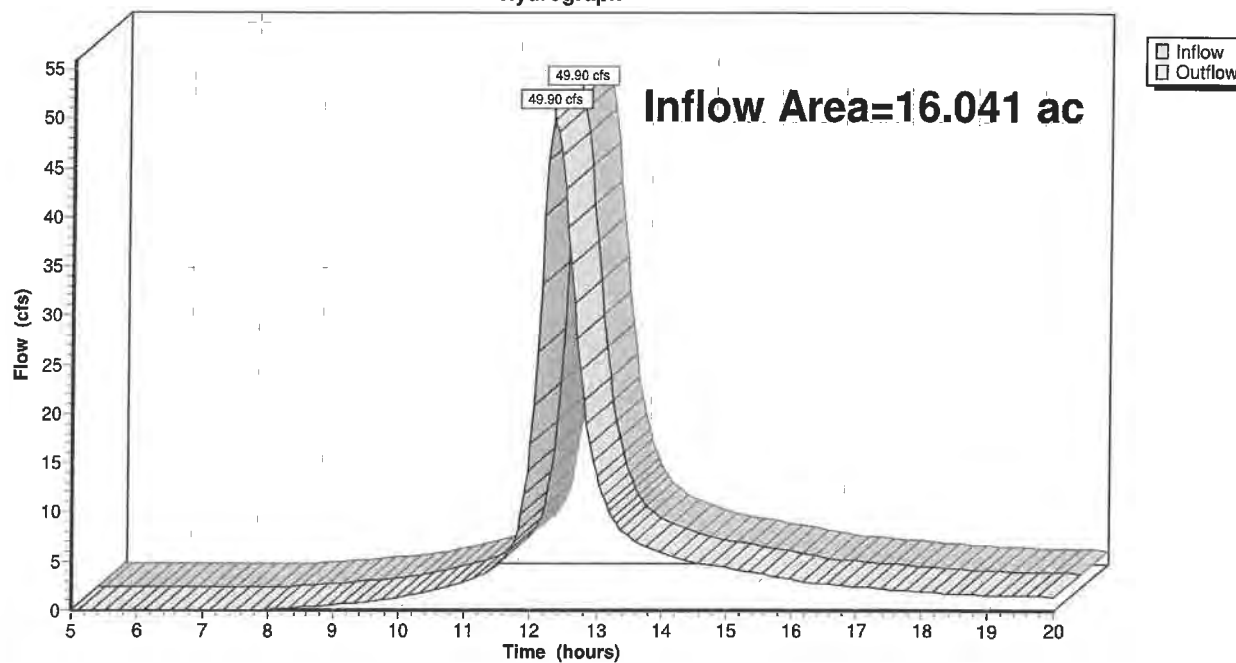

**J-018 -Pond 1
Smugglers Cover
HANTUSH GROUNDWATER MOUND CALCULATOR**

This spreadsheet will calculate the height of a groundwater mound beneath a stormwater infiltration


Basin	Length	Width	Volume	Time		Total		w (perc)
	ft	ft	cf	start	end	Hrs	Days	ft/d
1	98	50	1,185	10	40	30	1.25	0.193

di

K (hyd. Conductivity)*

Texture	m/yr	m/d	ft/d
sand	5.55E+03	15.21	49.89
loamy sand	4.93E+03	13.51	44.31
sandy loam	1.09E+03	2.99	9.80
silty loam	2.27E+02	0.62	2.04
loam	2.19E+02	0.60	1.97
sandy clay loam	1.99E+02	0.55	1.79
silty clay loam	5.36E+01	0.15	0.48
clay loam	7.73E+01	0.21	0.69
sandy clay	6.84E+01	0.19	0.61
silty clay	3.21E+01	0.09	0.29
clay	4.05E+01	0.11	0.36

Source: Clapp and Hornberger (1978)

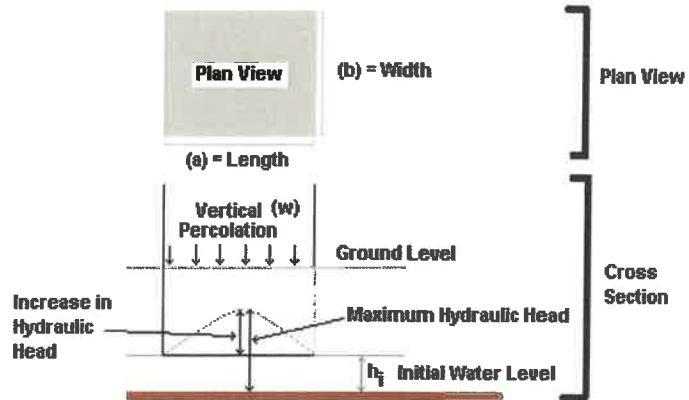


Input Values

2.04	K	Horizontal hydraulic conductivity (feet/day)
0.200	Sy	Specific yield (dimensionless)
2.000	hi	Initial Water Level (feet)
98.000	a	Basin Length (feet)
50.000	b	Basin Width (feet)
0.1930	w	Recharge (infiltration) rate (feet/day)
1.250	t	duration of infiltration period (days)

3.206	h(max)	Maximum Hydraulic Head (feet)
1.206	Δh(max)	Maximum Groundwater Mound (feet)

Ground-water Mound (ft)	Distance from Center (ft)
1.206	0
1.206	15
1.203	30
0.955	45
0.026	60
0.000	75
0.000	90
0.000	105
0.000	120
0.000	135

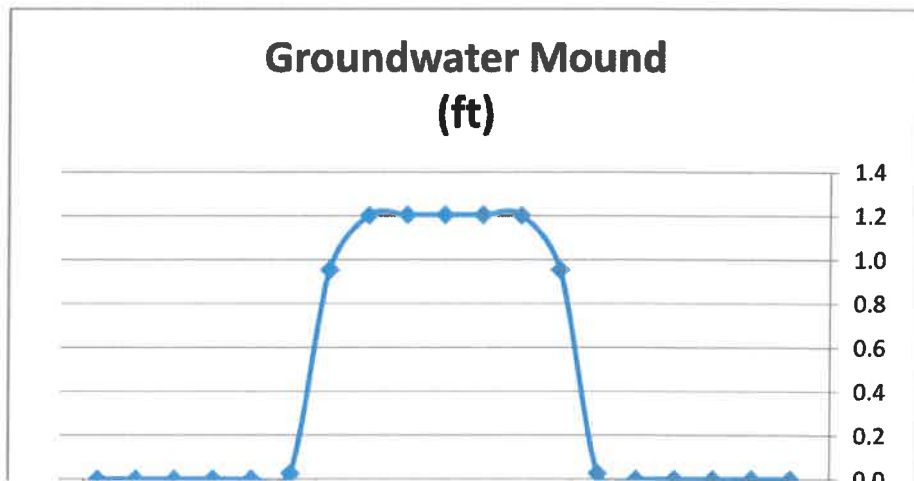

J-018 -Pond 1 Smugglers Cover HANTUSH GROUNDWATER MOUND CALCULATOR

This spreadsheet will calculate the height of a groundwater mound beneath a stormwater infiltration


Basin	Length	Width	Volume	Time		Total		w (perc)
	ft	ft	cf	start	end	Hrs	Days	ft/d
1	150	50	1,185	12.5	32.5	20	0.83	0.190

di

K (hyd. Conductivity)*

Texture	m/yr	m/d	ft/d
sand	5.55E+03	15.21	49.89
loamy sand	4.93E+03	13.51	44.31
sandy loam	1.09E+03	2.99	9.80
silty loam	2.27E+02	0.62	2.04
loam	2.19E+02	0.60	1.97
sandy clay loam	1.99E+02	0.55	1.79
silty clay loam	5.36E+01	0.15	0.48
clay loam	7.73E+01	0.21	0.69
sandy clay	6.84E+01	0.19	0.61
silty clay	3.21E+01	0.09	0.29
clay	4.05E+01	0.11	0.36

Source: Clapp and Hornberger (1978)

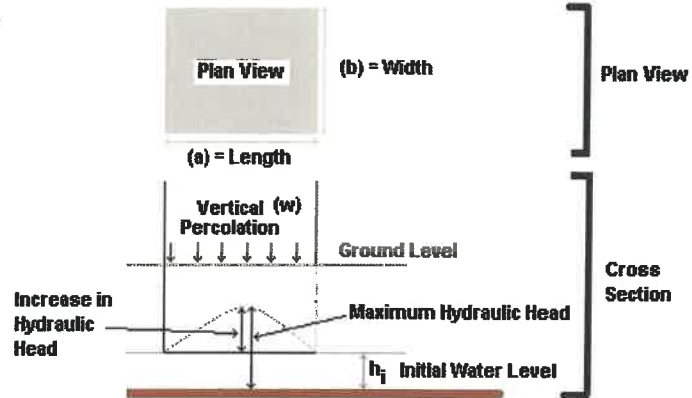


Input Values

2.04	K	Horizontal hydraulic conductivity (feet/day)
0.200	Sy	Specific yield (dimensionless)
2.000	hi	Initial Water Level (feet)
150.000	a	Basin Length (feet)
50.000	b	Basin Width (feet)
0.1900	w	Recharge (infiltration) rate (feet/day)
0.833	t	duration of infiltration period (days)

2.792	h(max)	Maximum Hydraulic Head (feet)
0.792	Δh(max)	Maximum Groundwater Mound (feet)

Ground-water Mound (ft)	Distance from Center (ft)
0.792	0
0.792	15
0.792	30
0.792	45
0.790	60
0.396	75
0.001	90
0.000	105
0.000	120
0.000	135

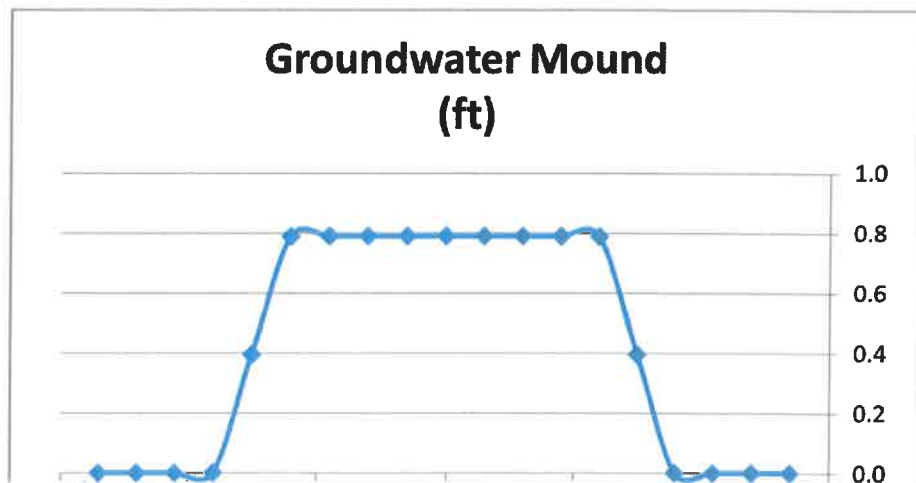


STAGE-STORAGE WORKSHEET					
	DATE:	8/28/2022		CLIENT:	Schold
	PROJECT NUMBER:	J-018		CALCULATED BY:	PML
	BASIN NUMBER:	2		CHECKED BY:	
	LOCATION:	BASIN 2			
ELEVATION	AREA	AVERAGE AREA	VERTICAL INTERVAL	VOLUME INCREMENTAL	VOLUME CUMULATIVE
(FEET)	(FT ²)	(FT ²)	(FT)	(FT ³)	(FT ³)
922.0	3726				0
922.5	4788	4257	1	2129	2129

STAGE-STORAGE WORKSHEET					
DATE:		8/28/2022		CLIENT: Schold	
PROJECT NUMBER:		J-018		CALCULATED BY: PML	
BASIN NUMBER:		2		CHECKED BY:	
LOCATION:		BASIN 2			
ELEVATION	AREA	AVERAGE AREA	VERTICAL INTERVAL	VOLUME INCREMENTAL	VOLUME CUMULATIVE
(FEET)	(FT ²)	(FT ²)	(FT)	(FT ³)	(FT ³)
922.0	875				0
924.5	2240	1558	3	3894	3894







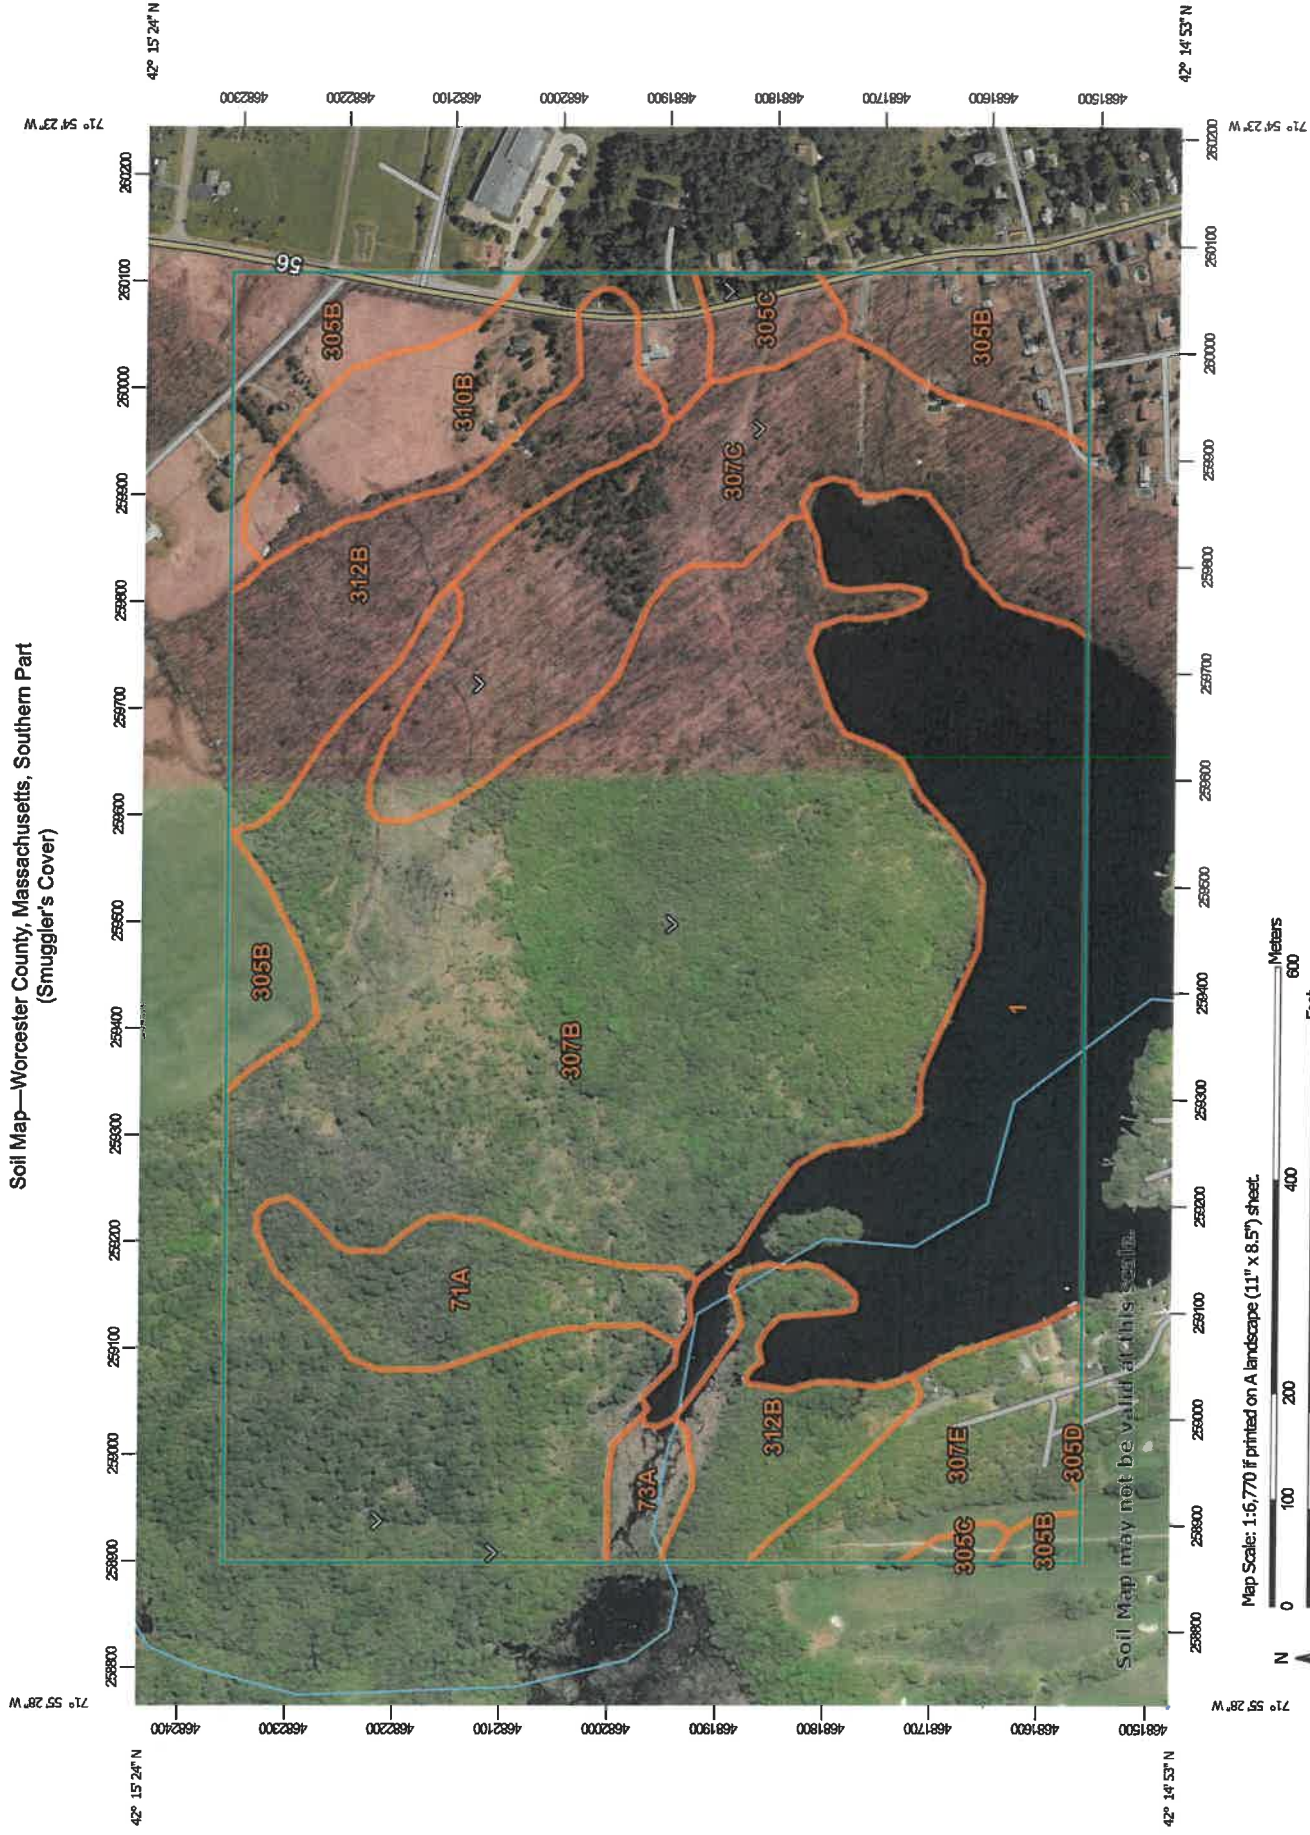



































STAGE-STORAGE WORKSHEET					
DATE: 8/28/2022		CLIENT: Schold			
PROJECT NUMBER: J-018		CALCULATED BY: PML			
BASIN NUMBER: 2		CHECKED BY:			
LOCATION: BASIN 2					
		AVERAGE	VERTICAL	VOLUME	VOLUME
ELEVATION	AREA	AREA	INTERVAL	INCREMENTAL	CUMULATIVE
(FEET)	(FT ²)	(FT ²)	(FT)	(FT ³)	(FT ³)
934.0	875				0
936.5	1805	1340	3	3350	3350

STAGE-STORAGE WORKSHEET					
DATE: 8/28/2022			CLIENT: Schold		
PROJECT NUMBER: J-018			CALCULATED BY: PML		
BASIN NUMBER: 1			CHECKED BY:		
LOCATION: BASIN 1					
ELEVATION	AREA	AVERAGE AREA	VERTICAL INTERVAL	VOLUME INCREMENTAL	VOLUME CUMULATIVE
(FEET)	(FT ²)	(FT ²)	(FT)	(FT ³)	(FT ³)
932.0	2221				0
932.5	2518	2370	1	1185	1185

Soil Map—Worcester County, Massachusetts, Southern Part (Smuggler's Cove)



MAP LEGEND

	Area of Interest (AOI)		Spill Area
	Area of Interest (AOI)		Stony Spot
	Soils		Very Stony Spot
	Soil Map Unit Polygons		Wet Spot
	Soil Map Unit Lines		Other
	Soil Map Unit Points		Special Line Features
	Special Point Features		Water Features
	Blowout		Streams and Canals
	Borrow Pit		Transportation
	Clay Spot		Rails
	Closed Depression		Interstate Highways
	Gravel Pit		US Routes
	Gravelly Spot		Major Roads
	Landfill		Local Roads
	Lava Flow		Background
	Marsh or swamp		Aerial Photography
	Mine or Quarry		
	Miscellaneous Water		
	Perennial Water		
	Rock Outcrop		
	Saline Spot		
	Sandy Spot		
	Severely Eroded Spot		
	Sinkhole		
	Slide or Slip		
	Sodic Spot		

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:25,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL:
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Worcester County, Massachusetts, Southern Part
Survey Area Data: Version 14, Sep 3, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Apr 8, 2011—Jul 9, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
1	Water	38.4	16.0%
71A	Ridgebury fine sandy loam, 0 to 3 percent slopes, extremely stony	9.2	3.8%
73A	Whitman fine sandy loam, 0 to 3 percent slopes, extremely stony	2.1	0.9%
305B	Paxton fine sandy loam, 3 to 8 percent slopes	17.4	7.2%
305C	Paxton fine sandy loam, 8 to 15 percent slopes	3.1	1.3%
305D	Paxton fine sandy loam, 15 to 25 percent slopes	0.2	0.1%
307B	Paxton fine sandy loam, 0 to 8 percent slopes, extremely stony	99.0	41.3%
307C	Paxton fine sandy loam, 8 to 15 percent slopes, extremely stony	26.9	11.2%
307E	Paxton fine sandy loam, 15 to 35 percent slopes, extremely stony	9.4	3.9%
310B	Woodbridge fine sandy loam, 3 to 8 percent slopes	12.0	5.0%
312B	Woodbridge fine sandy loam, 0 to 8 percent slopes, extremely stony	22.3	9.3%
Totals for Area of Interest		240.0	100.0%

Worcester County, Massachusetts, Southern Part

305B—Paxton fine sandy loam, 3 to 8 percent slopes

Map Unit Setting

National map unit symbol: 2t2qp
Elevation: 0 to 1,570 feet
Mean annual precipitation: 36 to 71 inches
Mean annual air temperature: 39 to 55 degrees F
Frost-free period: 140 to 240 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Paxton and similar soils: 80 percent
Minor components: 20 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Paxton

Setting

Landform: Ground moraines, drumlins, hills
Landform position (two-dimensional): Summit, shoulder, backslope
Landform position (three-dimensional): Nose slope, side slope, crest
Down-slope shape: Convex, linear
Across-slope shape: Convex
Parent material: Coarse-loamy lodgment till derived from gneiss, granite, and/or schist

Typical profile

Ap - 0 to 8 inches: fine sandy loam
Bw1 - 8 to 15 inches: fine sandy loam
Bw2 - 15 to 26 inches: fine sandy loam
Cd - 26 to 65 inches: gravelly fine sandy loam

Properties and qualities

Slope: 3 to 8 percent
Depth to restrictive feature: 18 to 39 inches to densic material
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)
Depth to water table: About 18 to 37 inches
Frequency of flooding: None
Frequency of ponding: None
Maximum salinity: Nonsaline (0.0 to 1.9 mmhos/cm)
Available water supply, 0 to 60 inches: Low (about 3.1 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2s

Hydrologic Soil Group: C

Ecological site: F144AY007CT - Well Drained Dense Till Uplands

Hydric soil rating: No

Minor Components

Woodbridge

Percent of map unit: 9 percent

Landform: Ground moraines, drumlins, hills

Landform position (two-dimensional): Summit, backslope, footslope

Landform position (three-dimensional): Side slope

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Ridgebury

Percent of map unit: 6 percent

Landform: Hills, drainageways, depressions, ground moraines

*Landform position (two-dimensional): Toeslope, backslope,
footslope*

Landform position (three-dimensional): Base slope, head slope, dip

Down-slope shape: Concave

Across-slope shape: Concave

Hydric soil rating: Yes

Charlton

Percent of map unit: 5 percent

Landform: Hills

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Data Source Information

Soil Survey Area: Worcester County, Massachusetts, Southern Part

Survey Area Data: Version 14, Sep 3, 2021

Operation & Maintenance Plan After Construction

**Inspection and Maintenance Log
AFTER CONSTRUCTION**

FOR: 153 Paxton Street
& After 3.0" Rain

Components	Date
Basin#1	
– twice a year	
Comments during insp.	
Note corrective measures performed & Date	
Basin#2	
-twice a year	
Comments during insp.	
Note corrective measures performed & date	
Forebay#1	
-twice a year	
Comments during insp.	
Note corrective measures performed & date	
Forebay#2	
-twice a year	
Comments during insp.	
Note corrective measures performed & date	
Catch Basins	
– 8 inches of sediment or twice a year	
Comments during insp.	
Note corrective measures performed & date	
_____ Inspector Title Date	
_____ Address Tel#	

**Inspection and Maintenance Log
AFTER CONSTRUCTION**

FOR: 153 Paxton Street
& After 3.0" Rain

Components	Date
Outlet Control Structure#1	
-8 inches of sediment or twice a year	
Comments during insp.	
Note corrective measures performed & date	
Outlet Control Structure #2	
Twice a year	
Comments during insp.	
Note corrective measures performed & date	
Drain Manholes	
-four times a year	
Comments during insp.	
Note corrective measures performed & date	
Level Spreader Basin 1	
-Twice a year	
Comments during insp.	
Note corrective measures performed & date	
Level Spreader Basin 2	
-Twice a year	
Comments during insp.	
Note corrective measures performed & date	
All Flared end sections and rip rap aprons	
- twice a year	
Comments during insp.	
Note corrective measures performed & date	
_____ Inspector Title Date	
Components	Date

Operation & Maintenance Plan During Construction

J-018

**WEEKLY
Inspection and Maintenance Log
DURING CONSTRUCTION**

FOR: 153 Paxton Street
& After 0.5" Rain

Components	Date
Erosion Control – Weekly	
Comments during insp.	
Note corrective measures performed & Date	
On Site Pavement Sweeping – as Needed	
Comments during insp.	
Note corrective measures performed & date	
Silt Fence & Composite Sock– Monthly	
Comments during insp.	
Note corrective measures performed & date	
Temporary Basin Area as Needed	
Comments during insp.	
Note corrective measures performed & date	
Construction Entrance as Needed	
Comments during insp.	
Note corrective measures performed & date	
<div style="text-align: right;"> <div style="display: flex; justify-content: space-between; width: 100%;"> <div>Inspector</div> <div>Title</div> <div>Date</div> </div> </div>	
<div style="text-align: right;"> <div style="display: flex; justify-content: space-between; width: 100%;"> <div>Address</div> <div>Tel#</div> </div> </div>	

**WEEKLY
Inspection and Maintenance Log
DURING CONSTRUCTION**

FOR: 153 Paxton Street
& After 0.5" Rain

Components	Date
Notify Cons. Comm. Issues effecting Resource Areas	
Comments during insp.	
Note corrective measures performed & date	
Silt of Public (Charlton Road) Streets – Daily	
Comments during insp.	
Note corrective measures performed & date	
Stockpile Materials Ring with Composite Sock – Weekly	
Comments during insp.	
Note corrective measures performed & date	
Any Spill Fuel, Chemical- Daily	
Comments during insp.	
Note corrective measures performed & date	
Temporary Ground Cover Area – Weekly	
Comments during insp.	
Note corrective measures performed & date	
Temporary Stone at Access Drive as Needed	
Comments during insp.	
Note corrective measures performed & date	
_____ Inspector Title Date	
_____ Address Tel#	

WEEKLY
Inspection and Maintenance Log
DURING CONSTRUCTION

FOR: 153 Paxton Street
 & After 0.5" Rain

Components	Date
Lawn Area / Mulch Area	
Erosion, Washouts	
Comments during insp.	
Note corrective measures performed & date	
Stone Aprons at Outfalls Exit as Needed	
Comments during insp.	
Note corrective measures performed & date	
Forebay as Needed	
Comments during insp.	
Note corrective measures performed & date	
Temporary Basins as Needed	
Comments during insp.	
Note corrective measures performed & date	
Illicit Drainage Discharge	
Comments during insp.	
Note corrective measures performed & date	
<div style="text-align: right;"> _____ Inspector Title Date </div>	
<div style="text-align: right;"> _____ Address Tel# </div>	