
SITE DEVELOPMENT PLAN SOLAR ENERGY STORAGE SYSTEM (ESS) 1355 MAIN STREET IN LEICESTER, MASSACHUSETTS SEPTEMBER 21, 2021

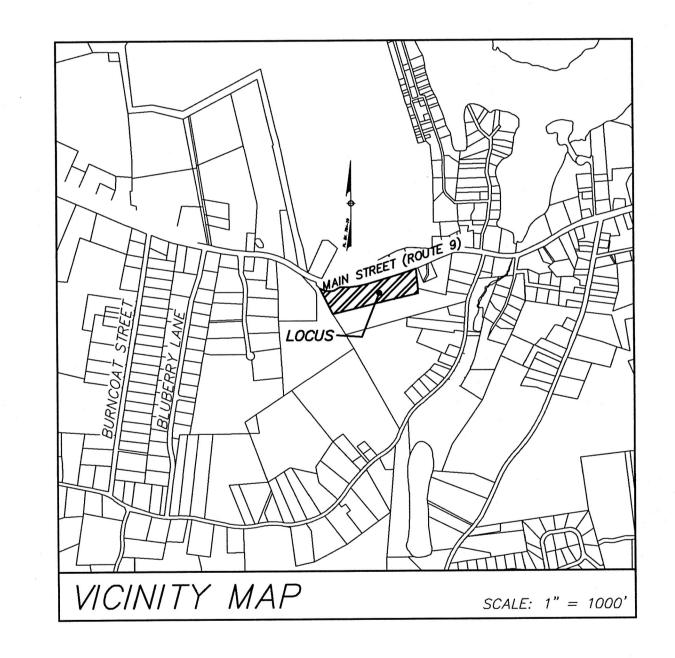

APPLICANT:

ZP BATTERY DEVCO, LLC BRENDON GOVE 10 E. WORCESTER STREET, SUITE 3A WORCESTER, MASSACHUSETTS 01604

OWNER:

WR ENTERPRISES, LLC 1323 MAIN STREET LEICESTER, MASSACHUSETTS 01420


CIVIL ENGINEER & LAND SURVEYOR:


HANNIGAN ENGINEERING, INC. 8 MONUMENT SQUARE LEOMINSTER, MASSACHUSETTS 01453 TEL: (978) 534-1234


PLAN INDEX

SHEET 1	INDEX PLAN
SHEET 2	EXISTING CONDITIONS PLAN
SHEET 3	SITE DEVELOPMENT PLAN
SHEETS 4-5	CONSTRUCTION DETAILS

PERMITTING SET - NOT FOR CONSTRUCTION

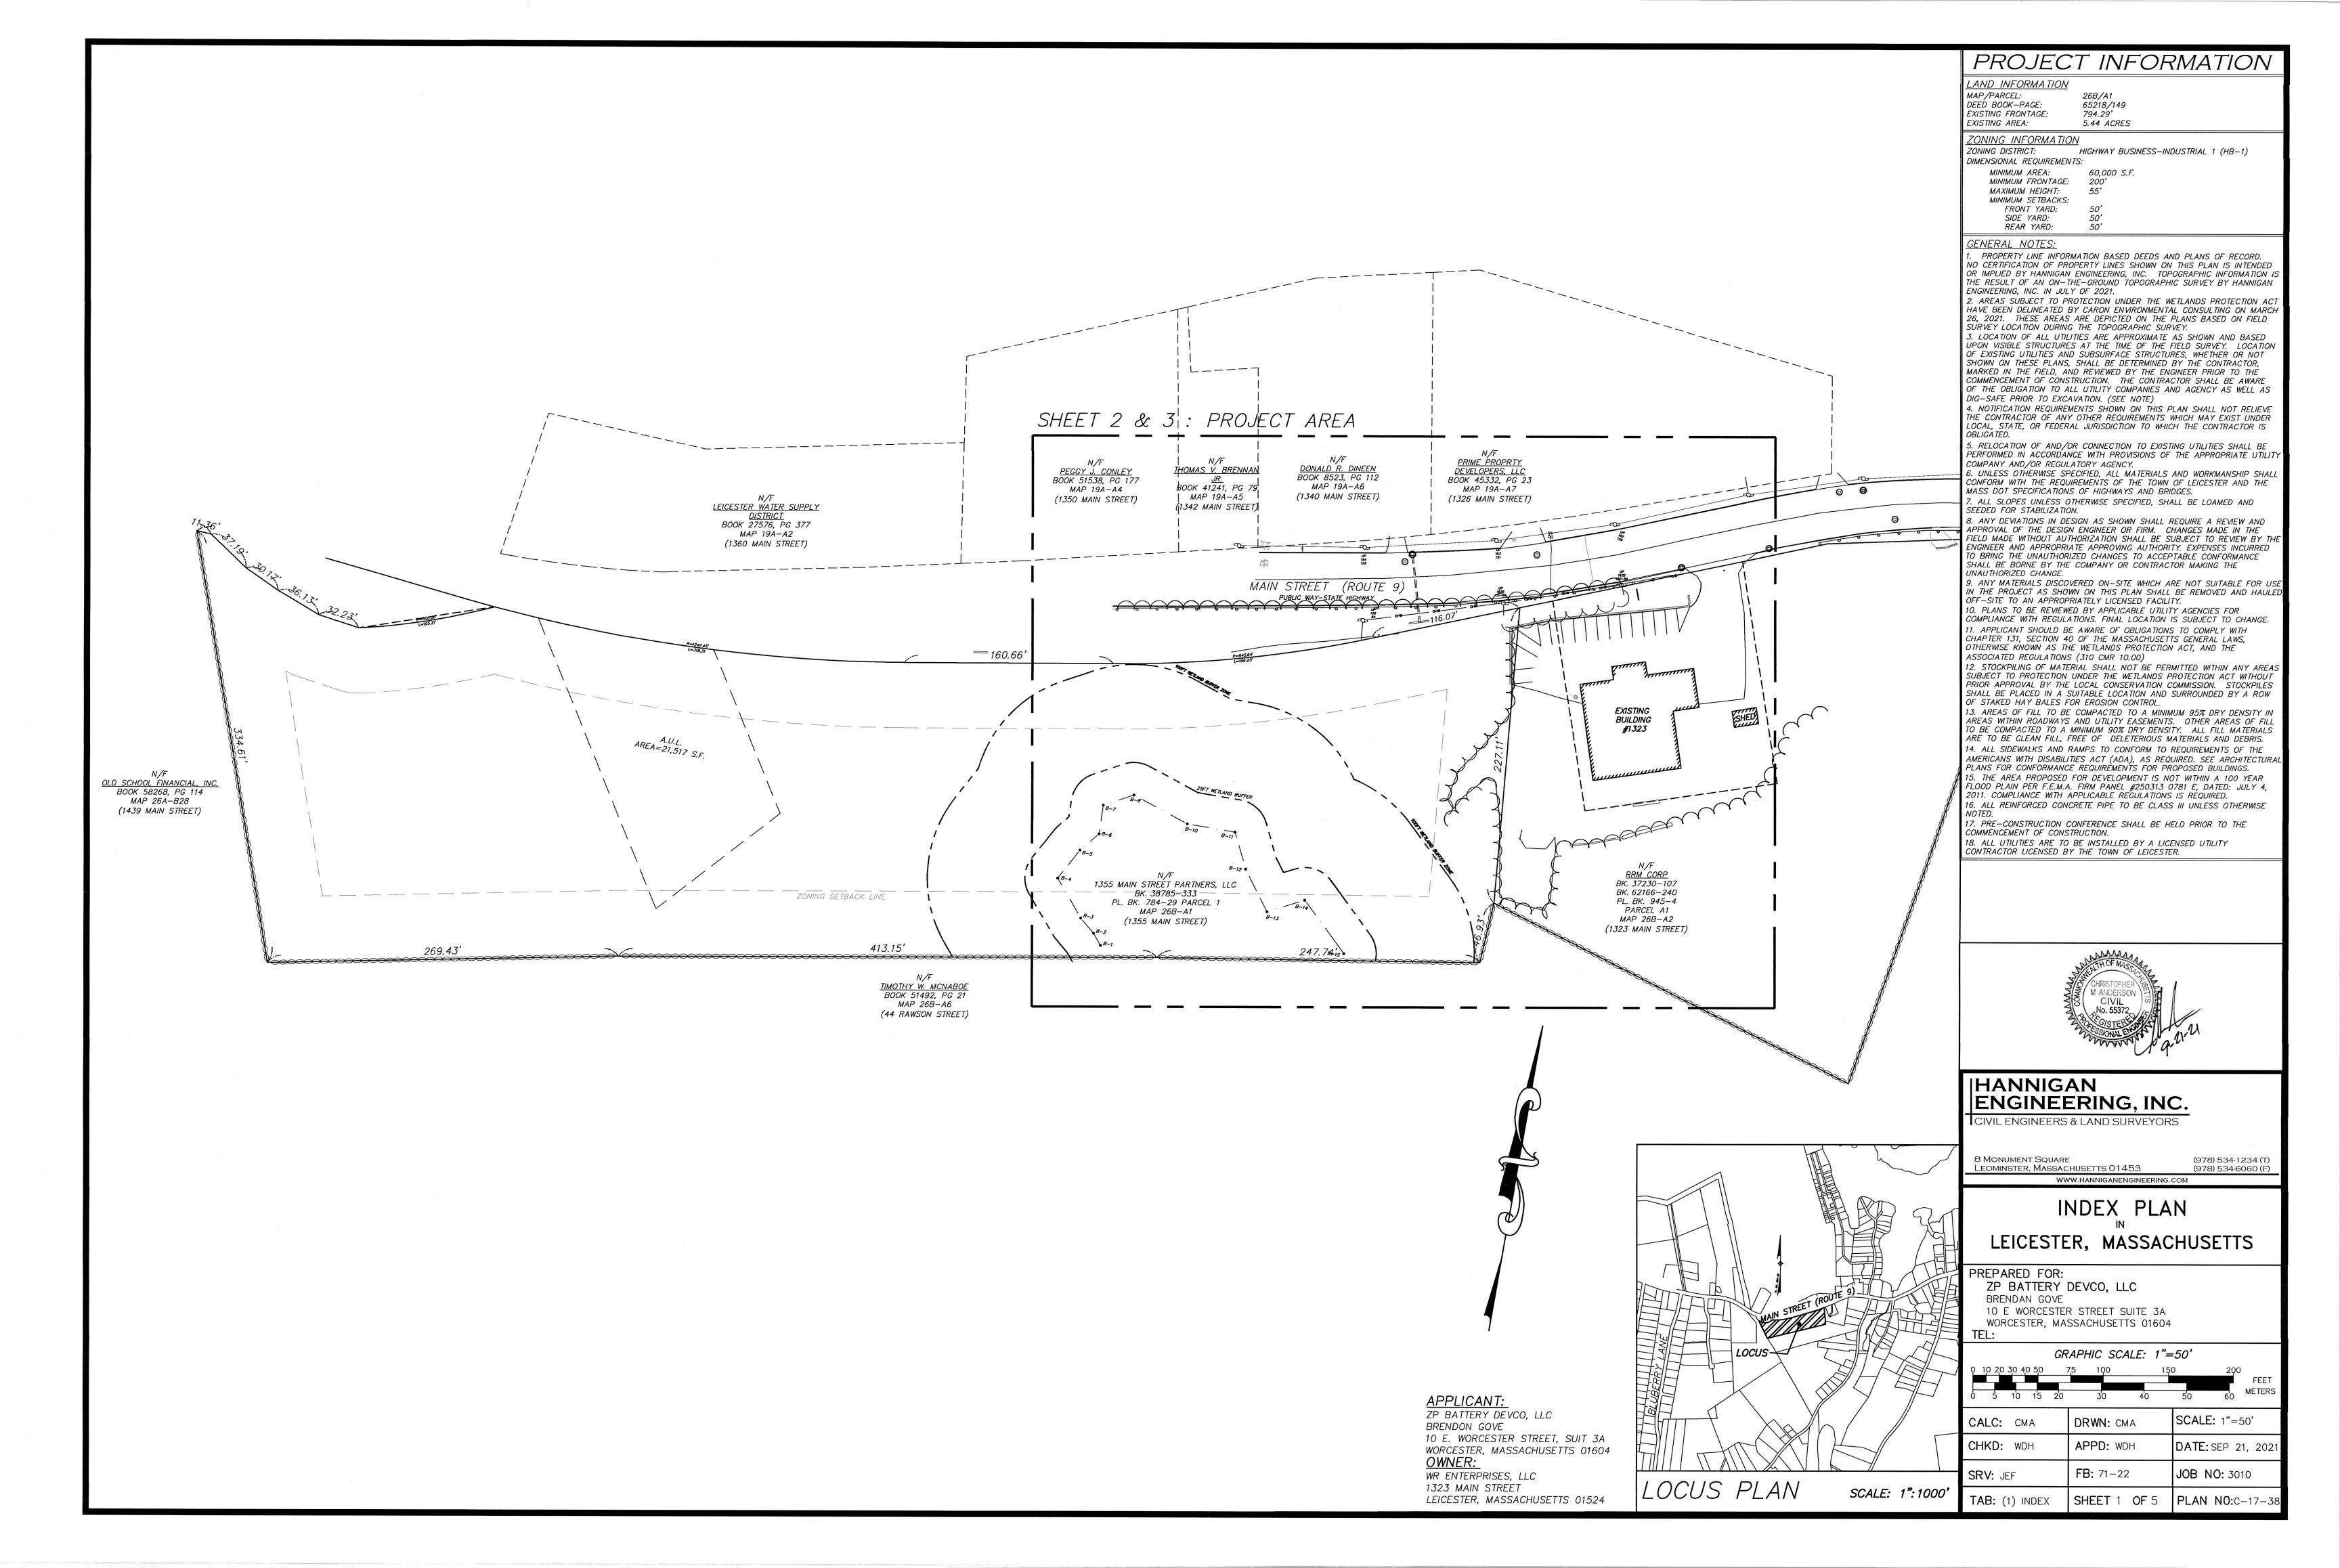

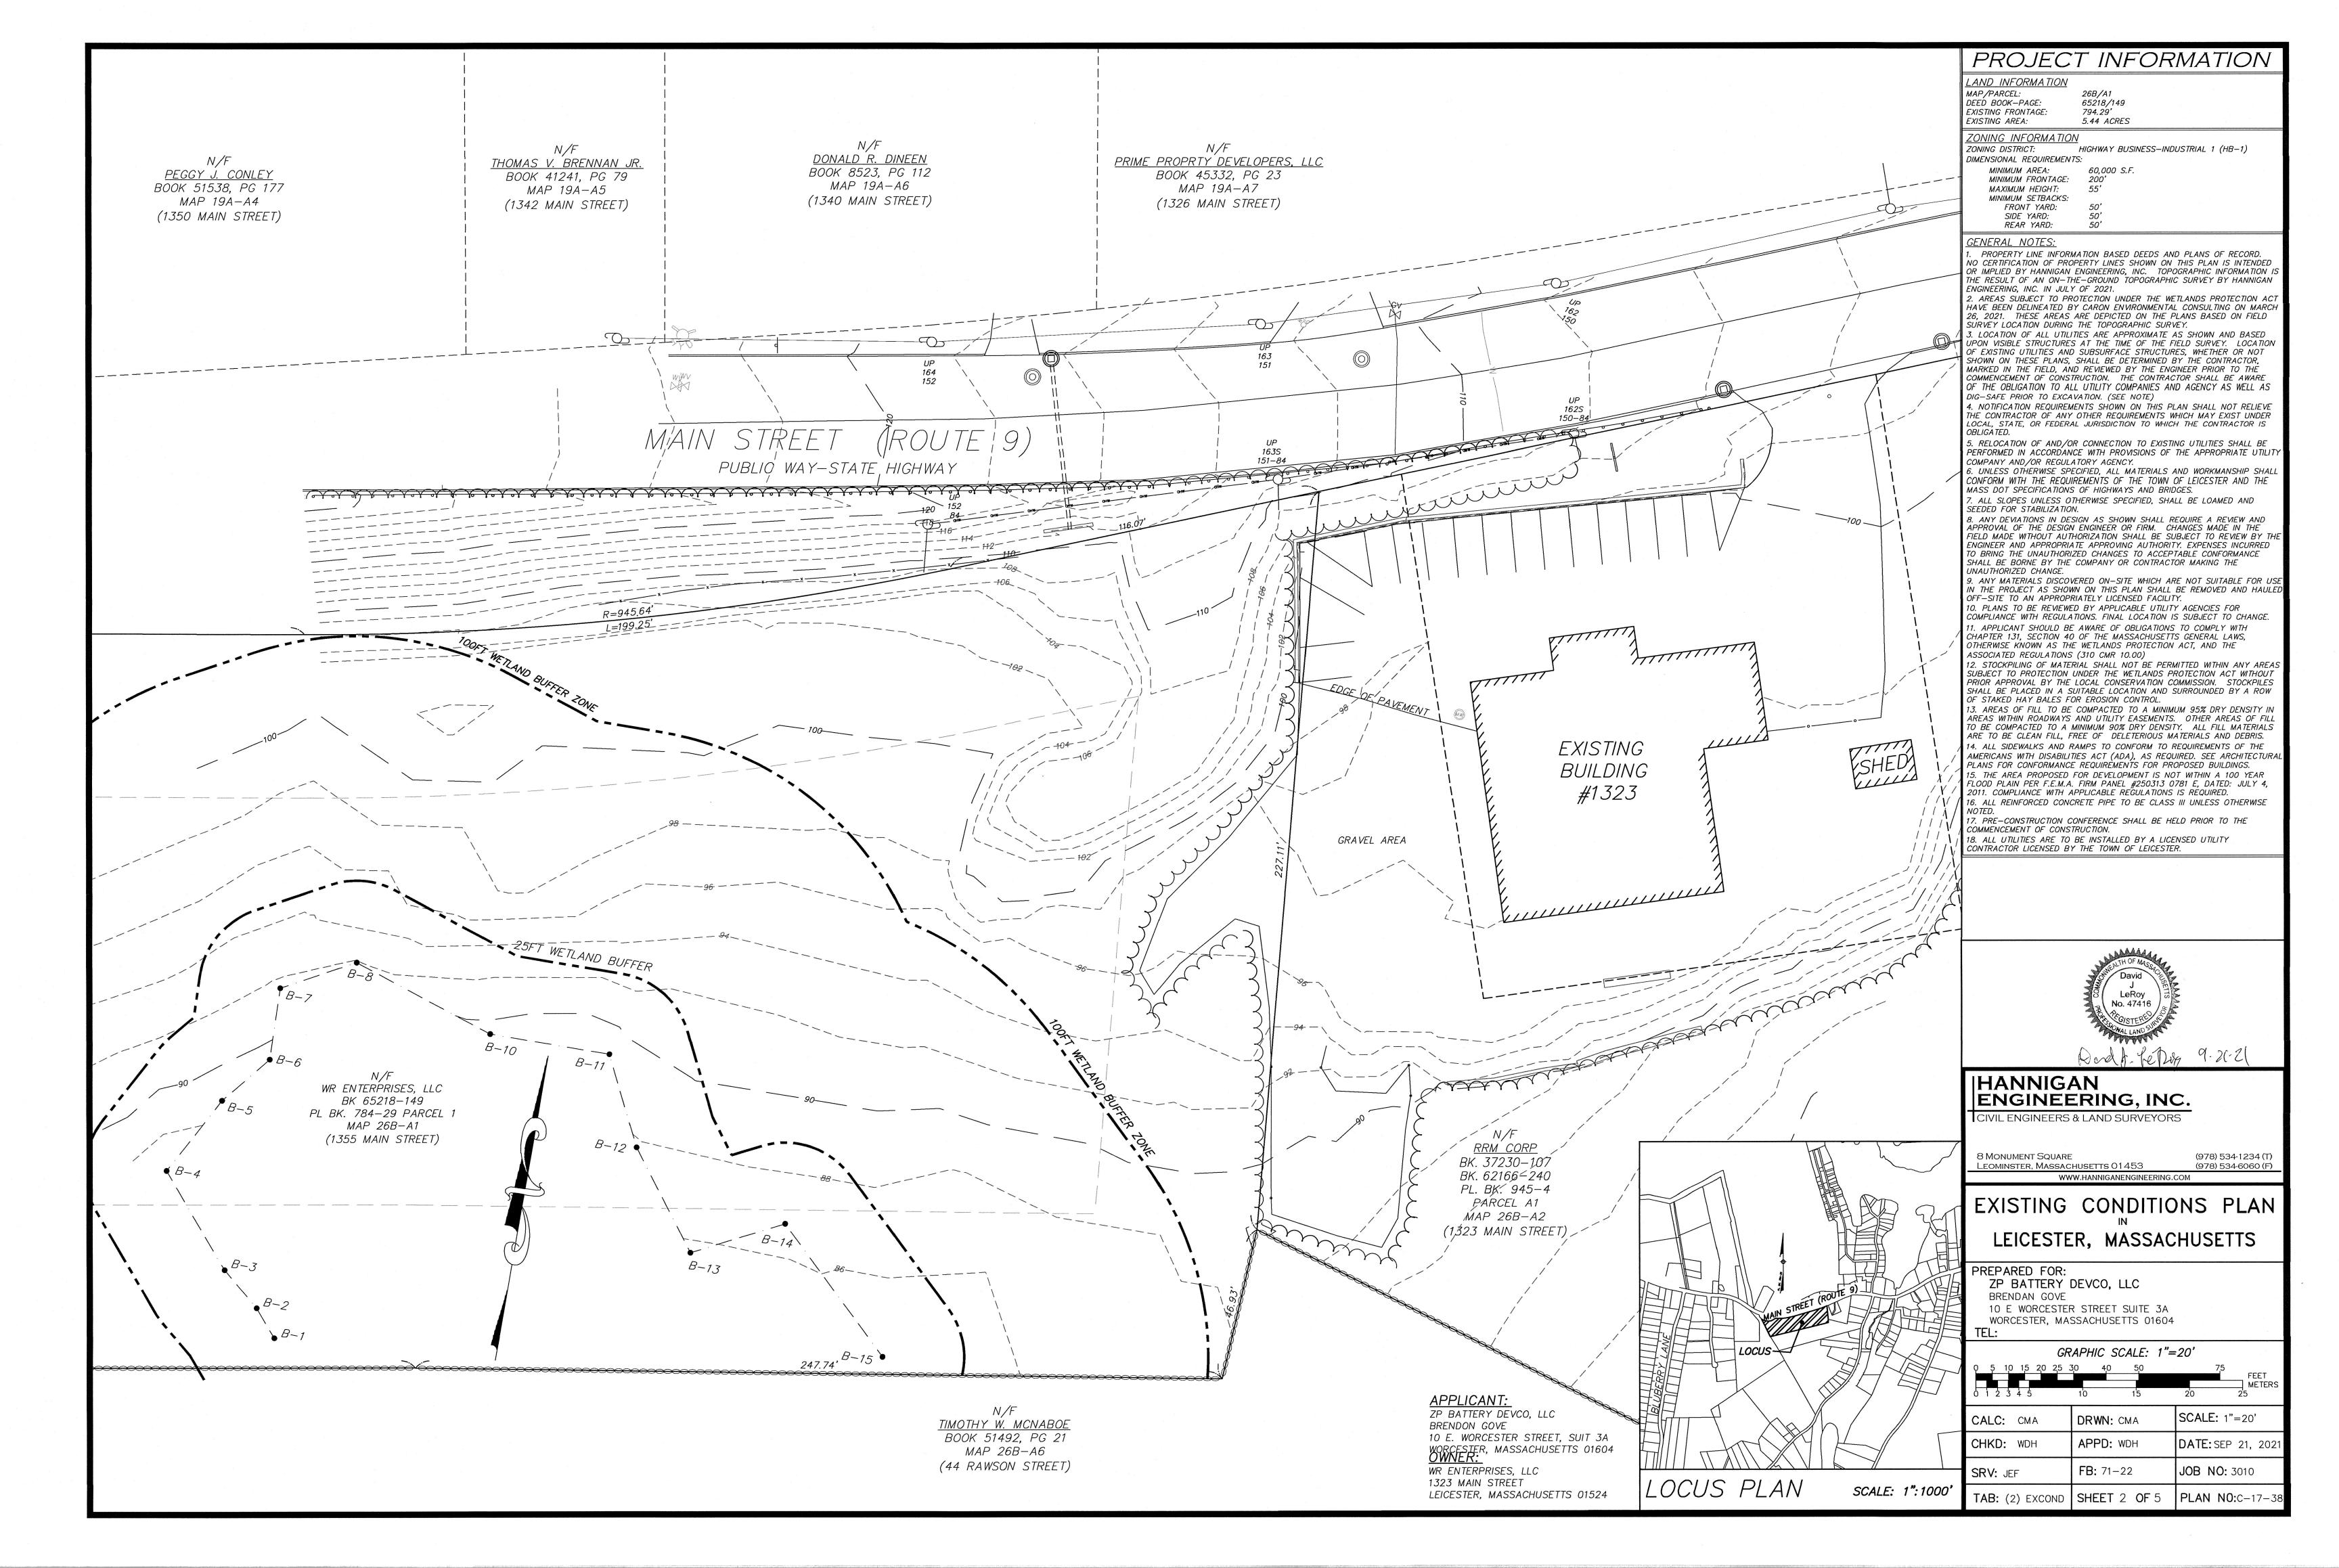

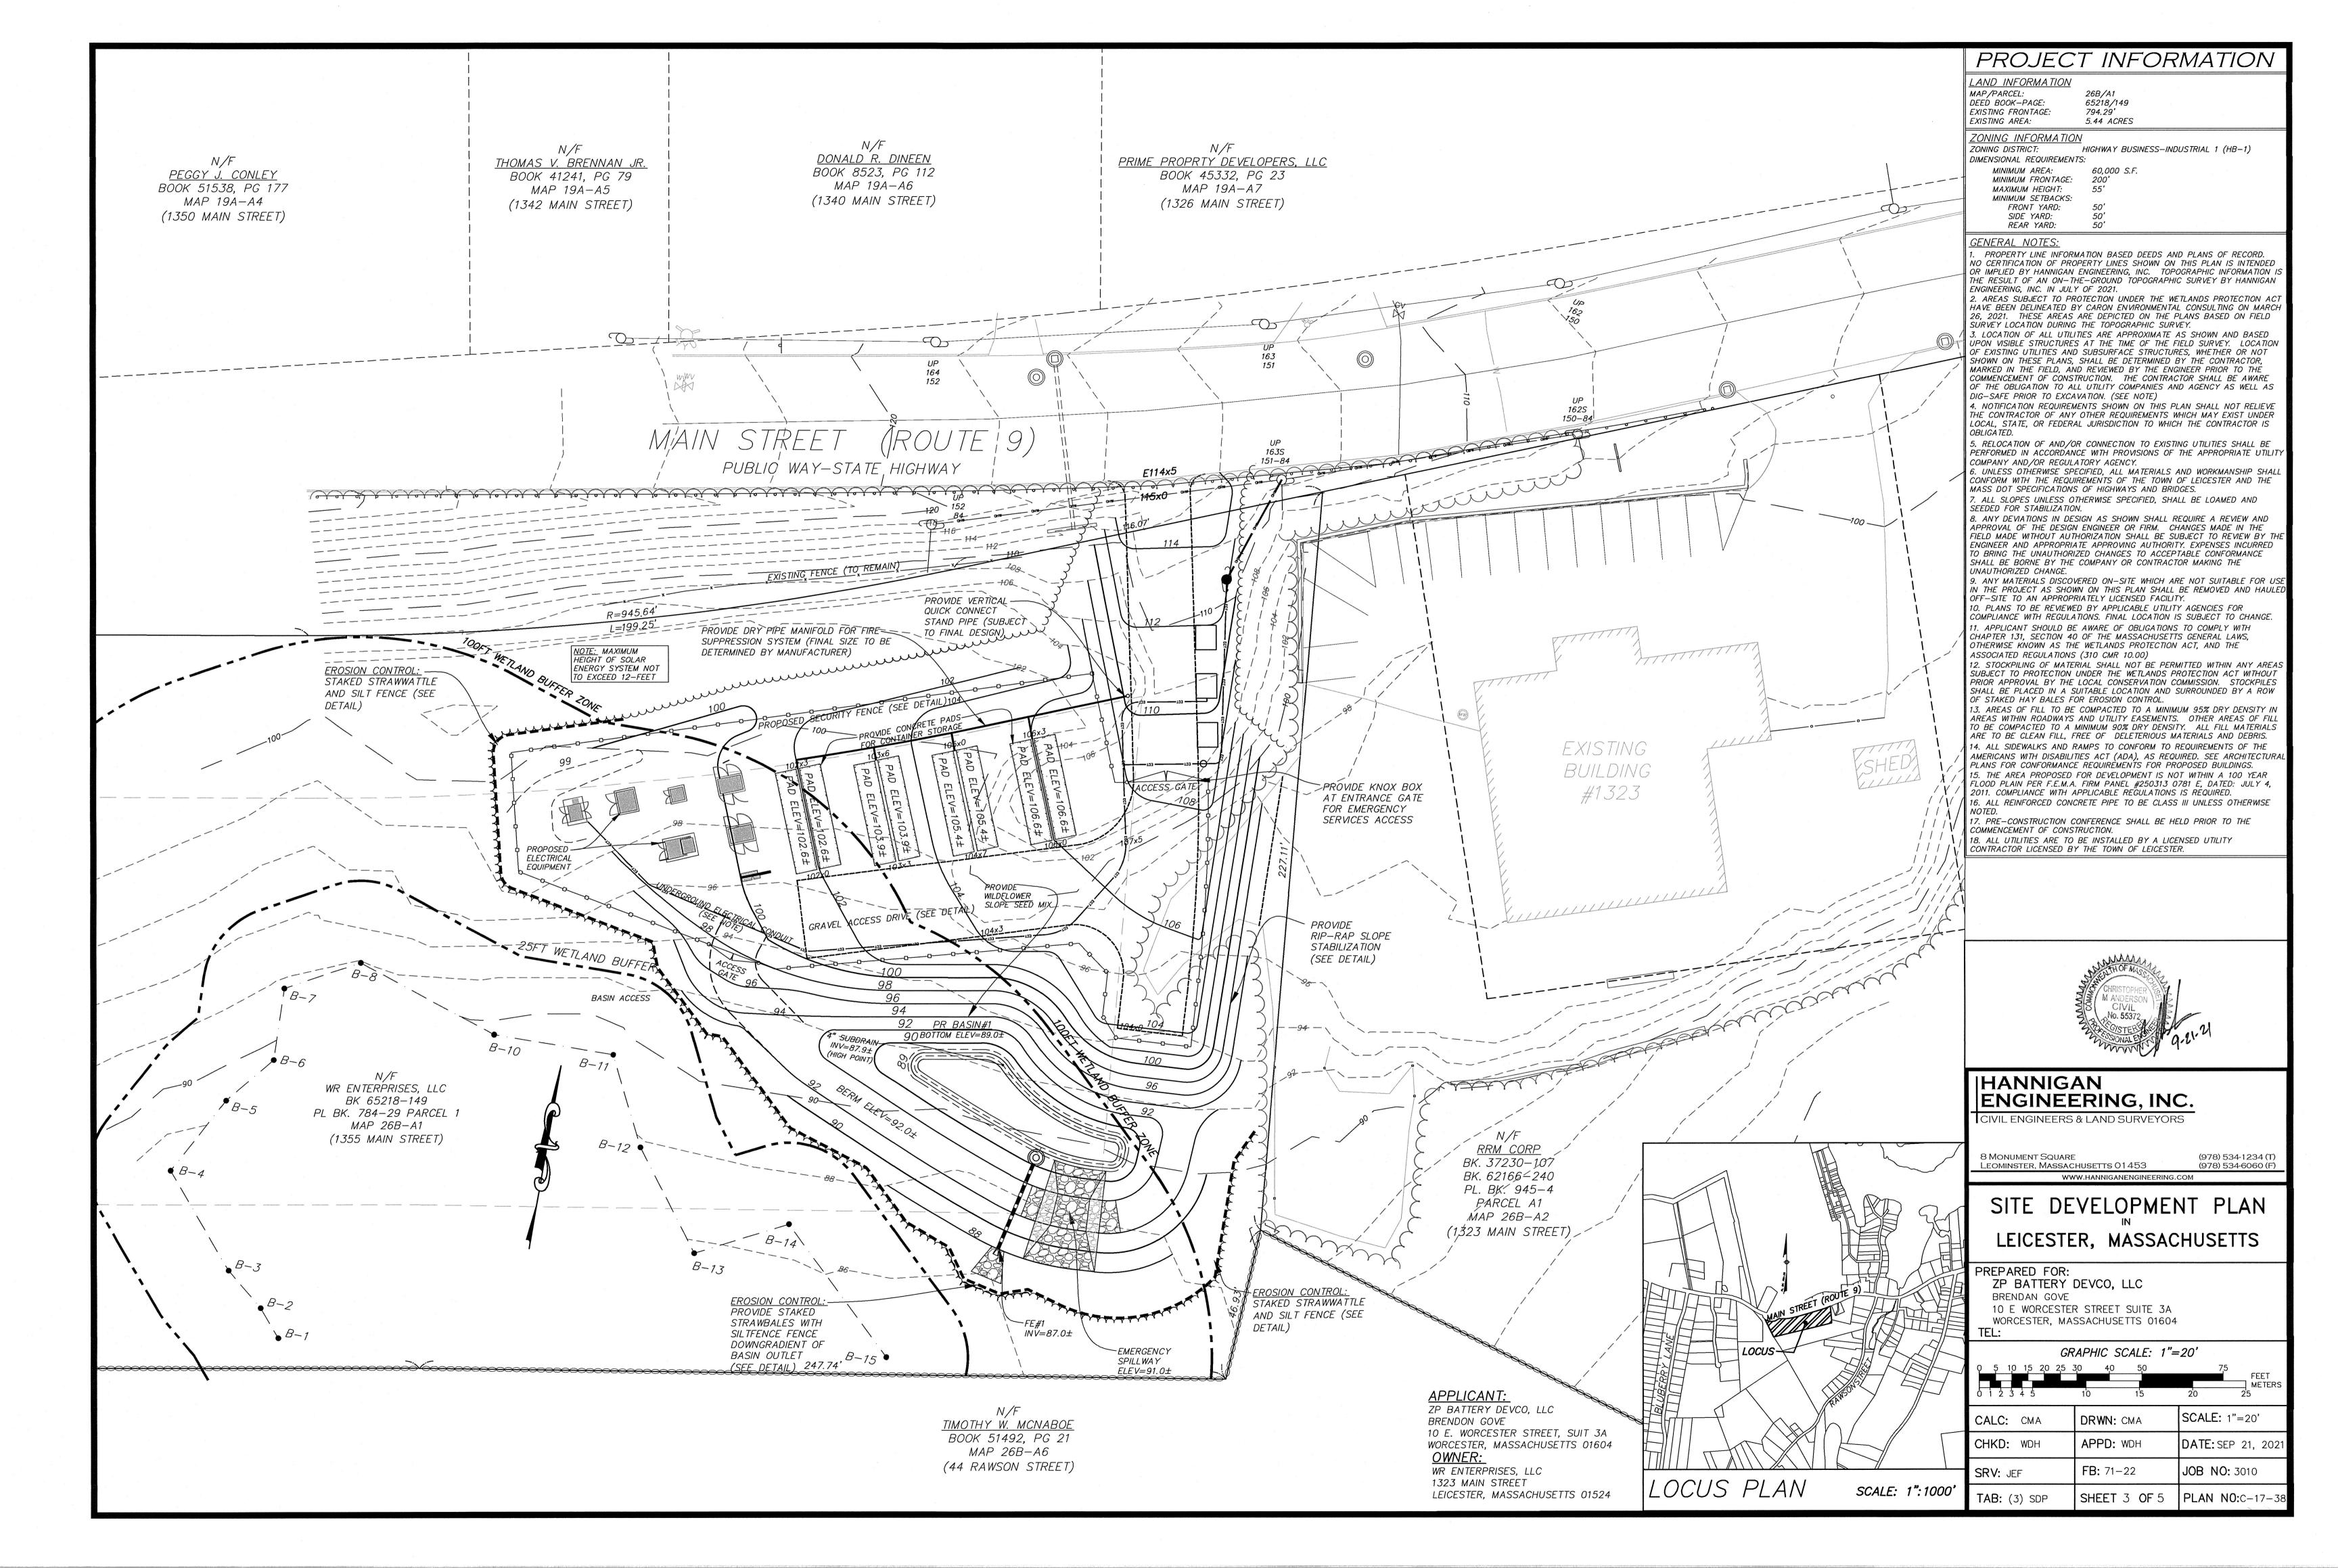

EROSION & SEDIMENTATION CONTROL PLAN

<u>GENERAL:</u>

. THE PURPOSE OF THIS PLAN IS TO PRESENT A PREVENTIVE METHOD F CONSTRUCTION TO MINIMIZE THE IMPACT OF THE CONSTRUCTION ACTIVITIES UPON WETLAND AND OTHER SENSITIVE AREAS. THE DATA CONTAINED ON THIS PLAN IS INTENDED TO SUPPLEMENT THE DEVELOPER OR CONTRACTORS' EXPERTISE AND IS NOT MEANT TO CIRCUMVENT LOGICAL DECISIONS REQUIRED BY A VARIETY OF FIELD CONDITIONS INCLUDING WEATHER AND THE TYPE OF EQUIPMENT AVAILABLE TO THE CONTRACTOR

THE CONTRACTOR IS TO BE AWARE OF THE REQUIREMENTS AND OBLIGATIONS TO COMPLY WITH CHAPTER 131, SECTION 40 OF THE MASSACHUSETTS GENERAL LAWS, OTHERWISE KNOWN AS THE WETLANDS PROTECTION ACT. AND ITS ASSOCIATED REGULATIONS (310 CMR 10.00) CERTAIN PERMITS IN THE FORM OF AN ORDER OF CONDITIONS, OR OTHER FORMAT, MAY BE REQUIRED FOR THE CONSTRUCTION AS DEPICTED ON THIS PLAN. THESE PERMITS SHALL BE REVIEWED AND ADHERED TO BY HE CONTRACTOR THROUGHOUT THE CONSTRUCTION PROCESS. THE CONTRACTOR SHALL ALSO MAINTAIN COPIES OF ALL PERMITS ON SITE

. IF CHANGES IN THE PROJECT ARE REQUIRED DUE TO FIELD CONDITIONS THE DEVELOPER/CONTRACTOR SHALL PROMPTLY NOTIFY THE ENGINEER FOR REVIEW OF THESE CONDITIONS. UPON REVIEW, AND PRIOR O THE IMPLEMENTATION OF ANY CHANGE, THE CONTRACTOR AND THE ENGINEER SHALL MEET WITH THE APPROPRIATE LOCAL AND/OR STATE OFFICIAL, OR ITS AGENT, TO DETERMINE IF THE CHANGE RÉQUIRES MODIFICATION TO EXISTING APPROVED PERMITS.

ALTERATION AND/OR DESTRUCTION OF WETLAND AREAS WITHOUT PRIOR CONSENT OF THE CONSERVATION COMMISSION IS PROHIBITED. SILTATION PLUMES, ILLICIT DISCHARGES, OR INADVERTANT ALTERATION SHALL BE CONSIDERED AS ACTIVITIES NOT PERMITTED BY THE ORDER AND SHALL BE REPORTED TO THE CONSERVATION COMMISSION ALONG WITH THE PROPOSED MITIGATIVE MEASURES.

PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE EROSION AND SEDIMENT CONTROL BARRIER SHALL BE INSTALLED AS SHOWN ON THE PLANS. THE CONTRACTOR SHALL MAINTAIN THE EROSION CONTROL BARRIER UNTIL ALL WORK IS COMPLETE AND ALL AREAS HAVE BEEN STABILIZED. THE REMOVAL OF SEDIMENT CONTROL DEVICES SHALL BE ONLY UPON THE APPROVAL OF THE CONSERVATION COMMISSION.

EROSION AND SEDIMENTATION CONTROL DEVICES, SUCH AS CHECK DAMS, SEDIMENT BASINS, ETC. ARE TO BE INSTALLED AS SHOWN ON THE SITE DEVELOPMENT PLANS WITH ASSOCIATED DETAILS, AS APPROPRIATE.

CONSTRUCTION OPERATIONS SHALL NOT CAUSE NOTICEABLE SEDIMENTATION PLUMES TO OCCUR ON OR SURROUNDING THE PROJECT. SHOULD SEDIMENT EXTEND BEYOND THE EROSION CONTROL BARRIERS, HE CONTRACTOR SHALL STOP WORK AND INSTALL ADDITIONAL MITIGATION MEASURES TO PREVENT FURTHER SEDIMENTATION.

3. NO MATERIAL SUBJECT TO EROSION SHALL BE STOCKPILED OVERNIGHT WITHIN 100 FEET OF ANY WETLAND AREAS WITHOUT PROPER EROSION AND SEDIMENTATION DEVICES IN PLACE.

9. EQUIPMENT SHALL NOT BE PARKED WITHIN WETLAND OR BUFFER AREAS EXCEPT DURING ACTUAL OPERATIONS REQUIRING SAID EQUIPMENT. . ACCUMULATED SEDIMENT ALONG EROSION CONTROL BARRIERS SHALL E PERIODICALLY REMOVED AND DISPOSED OF BY THE CONTRACTOR AS REQUIRED BY THE CONSERVATION COMMISSION OR AS DIRECTED BY THE

EROSION CONTROL METHODS:

. IT IS OF GREAT IMPORTANCE THAT CONCENTRATION OF RUNOFF BE AVOIDED IN ORDER TO PREVENT THE TRANSPORT OF SEDIMENT. . THE PRIMARY EROSION CONTROL METHOD TO BE UTILIZED IS TO LIMIT HE AREA OF DISTURBANCE DURING CONSTRUCTION ACTIVITIES. THIS IS ACCOMPLISHED BY PROMPT STABILIZATION OF DISTURBED AREAS UPON

EROSION AND SEDIMENT CONTROL DEVICES SUCH AS HAY BALES, SILT ENCES, DIVERSION BERMS, ETC. SHALL BE UTILIZED FOR THE ROTECTION OF THE AREAS BEYOND THE LIMIT OF CONSTRUCTION.

DEMARCATION OF SENSITIVE AREAS:

COMPLETION OF SEQUENCES OF CONSTRUCTION.

IT IS RECOMMEND THAT BARRIERS BE PLACED ON THE SITE TO CONTROL THE LIMITS OF THE DISTURBANCE. AS AN EXAMPLE, HAY BALE BARRIERS PROVIDE SUCH DEMARCATION AND OTHER METHODS SUCH AS LOG BARRIERS, ROPE WITH FLAGGING, ETC. MAY BE UTILIZED.

CARE SHOULD BE TAKEN IN THE OPERATION OF EQUIPMENT, SUCH HAT ONLY THE MINIMUM AREA NEEDED TO BE ALTERED IS DISTURBED.

ACCESS TO THE SITE SHALL BE MADE IN THE AREA OF A PERMANENT RIVEWAY OR ROADWAY UNLESS DOING SO WOULD RESULT IN A TRAFFIC

AN AREA OF CRUSHED STONE SHALL BE PLACED AT THE DRIVEWAY INTRANCE TO INSURE THAT MUD IS NOT TRACKED ONTO THE EXISTING ROAD (SEE CONSTRUCTION ENTRANCE DETAIL). IF MUD IS INADVERTENTLY TRACKÈD ONTO THE ROAD, IT SHOULD BE PROMPTLY REMOVED.

LABORERS VEHICLES SHALL BE PARKED IN A DESIGNATED AREA AS O MINIMIZE DISTURBED SURFACES AND TO INSURE THAT RUTS ARE NOT CREATED AND WHICH COULD CARRY WATER TO A WETLAND OR OTHER SUITABLE MEASURES SHALL BE TAKEN TO INSURE THAT LARGE

ELIVERY TRUCKS SERVICING THE SITE DO NOT DAMAGE TO AREAS OF EXISTING VEGETATION OR CAUSE DISTURBANCE TO STABILIZED AREAS.

PRDERLY CONSTRUCTION PROCEDURES:

THE CONTRACTOR SHALL PERFORM SITE CONSTRUCTION IN A MANNER WHICH WILL INSURE THE STABILIZATION OF AREAS IN PROXIMITY OF OR RIBUTARY TO WETLAND AREAS AS SOON AS POSSIBLE.

EROSION CONTROL DEVICES SUCH AS HAY BALE BARRIERS, SILT ENCES AND MULCH SHALL BE BROUGHT TO THE SITE AND STOCKPILED RIOR TO INITIATING CONSTRUCTION.


THE CONTRACTOR SHALL PROVIDE AREAS FOR THE TEMPORARY STORAGE OF CONSTRUCTION DEBRIS. CONSTRUCTION DEBRIS SHALL NOT BE ALLOWED TO ACCUMULATE FOR AN EXTENDED PERIOD OF TIME.

LAND CLEARING SHALL BE PERFORMED IN PHASES CONSISTENT WITH ACTUAL CONSTRUCTION REQUIREMENTS. FINAL LAND CLEARING SHALL BE LIMITED TO RETURN TO GRADE SLOPES.

TREES SHALL BE CUT FOR ENTIRE SITE LEAVING SUMPS IN PLACE TO MAINTAIN SOIL STABILIZATION.

3. STUMPS SHALL BE PULLED AND STOCKPILED FOR GRINDING. 4. BRUSH AND BRANCHES SHOULD BE CHIPPED AND UTILIZED FOR WOOD MULCH IF PRACTICAL.

. VEHICLES UTILIZED IN THE CLEARING OPERATION SHOULD NOT TRAVERSE WETLANDS OR FLOWING BROOKS OR STREAMS WITHOUT PRIOR APPROVAL FROM THE LOCAL CONSERVATION COMMISSION OR AGENT.

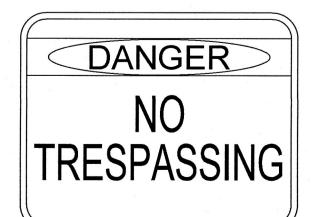

PERIMETER SIGNAGE NO SCALE

SIGNS TO BE PLACED ALONG FENCELINE AT 50 FT INTERVALS

ROUGH GRADING:

1. THE ROUGH GRADING OF THE SITE SHALL FOLLOW THE FILL AND EXCAVATION SEQUENCES AS DESCRIBED ON THE CONSTRUCTION PHASING PLANS. SLOPES SHALL BE MAINTAINED AWAY FROM WETLANDS AND SENSITIVE AREAS AS MUCH IS PRACTICAL.

2. DURING THIS PROCESS THE EROSION POTENTIAL IS HIGH. SUFFICIENT EROSION CONTROL BARRIERS SHOULD BE KEPT IN PROXIMITY TO THE WORK AREA TO ALLOW QUICK ACTION SHOULD EROSION BECOME AN ISSUE AND TO INSURE THAT NO SEDIMENT REACHES WETLANDS OR

3. IN AREAS OF CUT AND/OR FILL WHERE SLOPES COULD DIVERT WATER TOWARD WETLAND AREAS, DIVERSION TRENCHES AND/OR SWALES SHOULD BE CONSIDERED AND IMPLEMENTED TO DIVERT WATER AWAY

4. STEEP SIDE SLOPES IN EXCAVATION OR FILL SHOULD BE AVOIDED. DISTURBED AREAS SHALL BE STABILIZED BY LOAMING AND SEEDING OR RIPRAPPED IMMEDIATELY AFTER THE FINISH GRADE HAS BEEN MET. IF FINAL GRADING DOES NOT OCCUR DURING THE GROWING SEASON, THESE AREAS SHALL BE MULCHED WITH HAY WITH A TACKIFIER, IF NECESSARY SLOPED AREAS MAY REQUIRE ADDITIONAL CONTROLS SUCH AS EROSION CONTROL SOCKS OR HAYBALES.

6. A GROUND COVER SUFFICIENT TO RETAIN SOILS IN A STABILIZED CONDITION MUST BE PROVIDED WITHIN 14 WORKING DAYS, SEASON PERMITTING, ON ANY PORTION OF THE TRACT UPON WHICH FURTHER ACTIVE CONSTRUCTION IS NOT BEING UNDERTAKEN.

1. IF DRAINAGE PIPES OR SWALES ARE TO BE INSTALLED, THEY SHALL BE CONSTRUCTED FROM DOWNSTREAM UP AND CONSTRUCTION SHALL INCLUDE THE PLACEMENT OF OUTFALL RIPRAP AND OTHER MITIGATIVE MEASURES SHOWN ON THE PLAN.

2. PRIOR TO THE COMMENCEMENT OF CONSTRUCTION, HAY BALES OR OTHER SUITABLE METHODS TO ENTRAP SEDIMENT SHALL BE PLACED

3. THE TOE OF EMBANKMENTS SHALL BE STABILIZED IMMEDIATELY, MULCHED AND TACKED DOWN BY SUITABLE MEANS.

CREATION OF DETENTION BASIN:

THE DETENTION BASIN HAS BEEN PLACED AS A SEPARATE ITEM TO EMPHASIZE THE IMPORTANCE OF EROSION CONTROL DURING ITS

THE PRIMARY EROSION CONTROL METHOD FOR BASIN CONSTRUCTION. AS WELL AS FOR THE SITE IS THE RAPID STABILIZATION OF ALL SURFACES. SECONDARY IN IMPORTANCE IS THE CONCENTRATION OF RUNOFF BE AVOIDED IN ORDER TO PREVENT THE TRANSPORT OF

3. DURING CONSTRUCTION, THE FILL AND EXCAVATION SEQUENCES SHOWN ON THE CONSTRUCTION PHASING PLANS, ALONG WITH THE DETAILS PROVIDED IN THIS PLAN SET SHALL BE UTILIZED. THESE SEQUENCES REQUIRE THAT SLOPED AREAS LEFT FOR ANY PERIOD OF TIME NOT SLOPED TOWARDS THE WETLAND OR SENSITIVE AREA, BUT RATHER BACK INTO THE FILL MATERIAL.

4. THE BASIN BERM IS TO BE CONSTRUCTED BY EQUIPMENT WORKING ON STABLE MATERIAL ONLY. HAY BALES SHALL BE PLACED AT THE TOE OF SLOPE UNTIL SURFACES ARE STABILIZED.

5. NO EXCAVATION WITHIN THE BASIN SHALL COMMENCE UNTIL THE BERM IS IN PLACE.

6. CARE SHOULD BE TAKEN TO INSURE THAT ORGANIC MATERIAL REMOVED FROM THE BASIN AREA IS RESERVED FOR FINISH GRADING AND THE STABILIZATION OF DISTURBED AREAS. 7. IF DEWATERING IS NECESSARY, PUMPING TO A SETTLING BASIN SHALL

BE PERMITTED IF SETTLING BASIN IS CONSTRUCTED, MAINTAINED AND OPERATED EFFECTIVELY. 8 AT NO TIME SHALL RUNOFF CARRYING SEDIMENT BE ALLOWED TO

FLOW TO THE WETLANDS OR SENSITIVE AREAS.

9. THE WORK AREA SHALL REMAIN FREE OF LITTER AND DEBRIS AT ALL TIMES AND MONITORED ON A DAILY BASIS TO ENSURE COMPLIANCE. 10. ALL MATERIALS STOCKPILED SHALL BE LOCATED, MULCHED OR OTHERWISE TREATED TO INSURE THAT MATERIALS CONTAINED, THEREIN, AREA NOT CARRIED INTO THE WETLANDS.

11. ANY MATERIALS BLOWN OR CARRIED BY WATER AWAY FROM THE SITE OR INTO THE WEILAND AREAS SHALL BE PROMPTLY REMOVED AS REQUIRED BY THE LOCAL CONSERVATION COMMISSION. 12. A GEOTECHNICAL FILTER FABRIC SHALL BE PLACED OVER THE BASIN SUBDRAIN DURING CONSTRUCTION TO PREVENT SEDIMENT FROM ENTERING AND CLOGGING THE DRAIN. THE FABRIC SHALL BE REMOVED FOR BASIN PREPARATION FOR FINAL STABILIZATION.

GRUBBING AND STRIPPING:

1. TOP SOIL SHALL BE RETAINED AND STOCKPILED FOR LANDSCAPING PURPOSES.

2. GRUBBING AND STRIPPING OF SLOPES LEADING TO WETLAND AREAS SHOULD NOT BE UNDERTAKEN DURING PERIODS OF INTENSE RAINFALL. TOP SOIL STOCKPILE LOCATIONS ARE DEPICTED ON THE SITE DEVELOPMENT PLAN, THE EROSION CONTROL PLAN, AND/OR THE CONSTRUCTION PHASING PLAN AND SHALL BE ADHERED TO. 4. WHEN WORKING IN THE VICINITY OF WETLANDS, TOP SOIL SATURATED WITH WATER SHALL BE REMOVED, AND CONTAINED PRIOR TO BEING USED.

5. AREAS LEADING TO WETLANDS SHALL HAVE HAY BALE BARRIERS INSTALLED ACROSS THEM IN ARCS POINTING DOWN THE HILL AT INTERVALS SUFFICIENT TO MITIGATE RUNOFF CARRYING SEDIMENT.


6. DURING PERIODS OF INTENSE RAINFALL, OR IF THE PROJECT IS TO BE LEFT FOR A PERIOD OF TIME, CONSIDERATION SHOULD BE GIVEN TO SUPPLEMENT HAY BALE BARRIERS WITH EITHER CRUSHED STONE OR ARMORED BARRIERS. CONSIDERATION MAY ALSO BE GIVEN TO DIVERTING RUNOFF INTO TEMPORARY SEDIMENTATION CONTROL AREAS. 7. WHENEVER PRACTICAL, NATURAL VEGETATION SHALL BE RETAINED, PROTECTED AND SUPPLEMENTED.


6' SPACING

SPLICE -


ANCHOR

PATTERN_

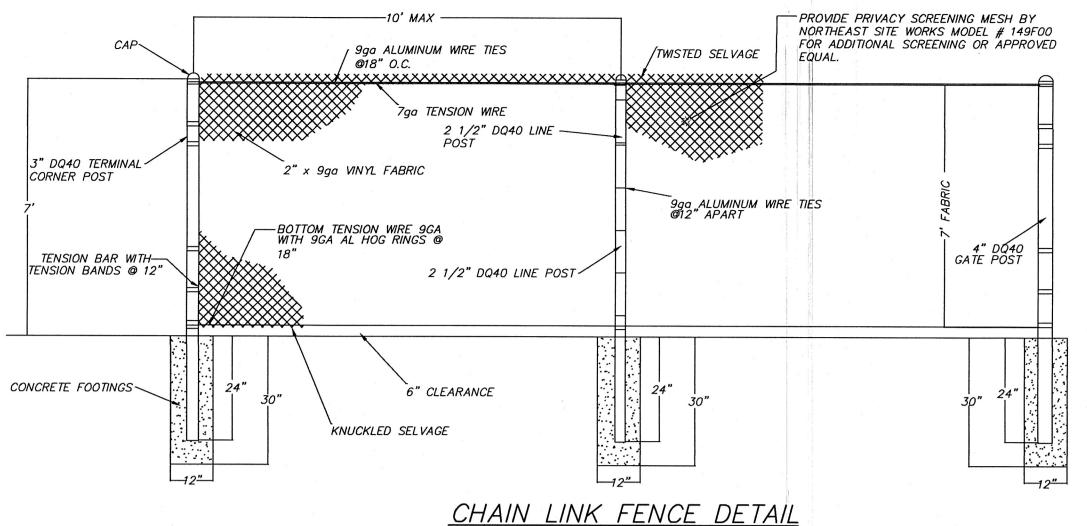


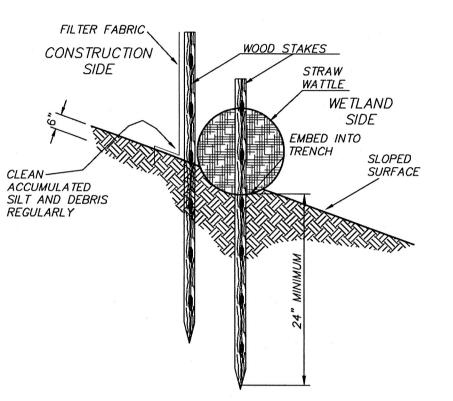

STRAW WATTLE DETAIL NO SCALE

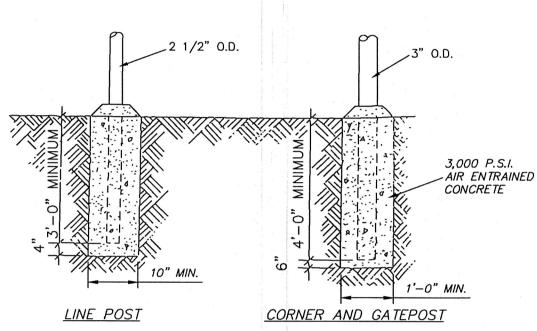

FENCE POST DETAIL NO SCALE

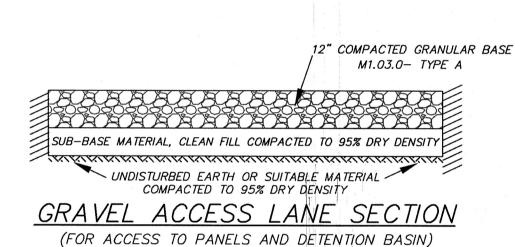

NO SCALE - 14FT WIDE

OWNER CONTACT INFORMATION (###) ### — #### OPERATOR CONTACT INFORMATION (###) ### — #### **EMERGENCY CONTACT INFORMATION** (###) ### — ####

> TOP OF EROSION

> CONTROL

BLANKET

COMPACT WITH FABRIC OVERLAP OF 12".

TYPICAL PROJECT SIGN NO SCALE 24" x 24"

SIGNS TO BE PLACED AT ENTRANCE OF PROJECT

DETAIL OF

TOP TRENCH

AND ANCHORS

"FACILITY NAME"

ADJACENT STRAW WATTLE SHALL TIGHTLY OVERLAP BY 2 FT. MIN. SECURE THE STRAW WATTLE WITH WOOD STAKES EVERY 3-4 FEET AND WITH A STAKE AT EACH END. STAKES SHOULD BE DRIVEN THROUGH THE MIDDLE OF THE WATTLE LEAVING 2-3" OF THE STAKE EXPOSED. STAKES SHOULD BE DRIVEN
PERPENDICULAR TO THE SLOPE FACE. (SEE STRAW WATTLE DETAIL) SLOPE SPACING STRAW 180 FEET `WATTLE 100 FEET 60 FEET 14% 18% 30% 40 FEET 30 FEET 20 FEET PREPARE SLOPES WITH FINAL GRADING AND LOAM PLACEMENT. RAKE AND SPACING IS -BASED ON SLOPE 2) START AT THE TOP OF SLOPE BY ANCHORING BLANKETS IN A 6" DEEP x 6" GRADIENT WIDE ANCHOR TRENCH. PLACE BLANKETS, STAPLE (8" STAPLES), BACKFILL AND (SEE TABLE)

* * * * * * * * *

· • • • • • • •

* * * * *

. • • •

COLOR OF ALL MATERIALS

INCLUDES 1QTY 20' WIDE DOUBLE GATE

ARE GALVANIZED

TERMINAL POSTS 3"

TENSION BANDS @ 12"

WIRE TO MATCH FABRIC.

BOTTOM TENSION WIRE

DOME CAPS RAIL ENDS

9ga TIE WIRES WITH STEEL CORE

3" BRACE BANDS

WITH 9ga AL HOG RINGS

FABRIC 2" MESH WITH 9aa

COATED STEEL CHAIN LINK

INSTALL WARNING T

DIRECTLY ABOVE ELECTRICAL LINE

FILTER CLOTH

* * *

* * * *

* * * * *

* * * * * * * *

(WHERE REQUIRED)
TO BE PLACED AGAINS

CONDUIT TRENCH

AND TRACER WIRE 12

BELOW FINISH GRADE

FABRIC AS PER ASTM F668

STEEL CORE GALVANIZED

with 9ga PVC EXTRUDED

POLY VINYL CHLORIDE

WIRE 9ga TENSION

GATE POSTS 4"

LINE POSTS 2.5"

3) ROLL BLANKETS DOWN THE SLOPE. STAPLE THE OPEN BLANKET EDGE USING ONE ROW OF STAPLES AT 2' INTERVALS. THE INTERIOR OF THE BLANKET SHOULD BE STAPLED USING A 2' WIDE x 3' HIGH STAPLE PATTERN. BE SURE TO LAY BLANKETS LOOSLY ON THE GROUND ALLOWING A GOOD CONTACT BETWEEN SOIL 4) USE AN 6" OVERLAP BETWEEN BLANKET SPLICES. USE A SINGLE ROW OF STAPLES TO ANCHOR BLANKETS TOGETHER.

PROCEDURES FOR INSTALLATION OF EROSION CONTROL BLANKET:

SMOOTH FINAL SURFACE, APPLY <u>APPLICABLE SEED MIX</u>.

5) PROVIDE 6"x 6" ANCHOR TRENCH AT TOE OF SLOPE. 6) EROSION CONTROL BLANKET TYPE SHALL BE PROPERLY SELECTED FOR SOIL

CONDITIONS AND MAXIMUM ALLOWABLE SLOPE. 7) ANY/ALL METALLIC ANCHORS SHALL BE PROMPTLY REMOVED ONCE THE VEGETATIVE COVER HAS BEEN ESTABLISHED.

8) GRASS SEED VARIETY SHALL BE PROPERLY CHOSEN FOR SPECIFIC SITE CONDITIONS (SHADE OR SUN. ETC.)

EROSION CONTROL BANKET PLACEMENT NO SCALE

EROSION CONTROL SLOPE DETAIL

APPLICANT: ZP BATTERY DEVCO, LLC BRENDON GOVE 10 E. WORCESTER STREET, SUIT 3A WORCESTER, MASSACHUSETTS 01604 OWNER: WR ENTERPRISES, LLC

LEICESTER, MASSACHUSETTS 01524

1323 MAIN STREET

SLOPE AWAY FROM DISTURBED SENSITIVE AREA WITH FACE AS SHOWN IN PHASE 1 WITH FINISH BASE GRADES OF WATER FROM DISTURBED PHASE III PHASE IV - EXISTING GRADE EXISTING GRADE **** ***** FINISH GRADE -FINISH GRADE-REMOVE BERM ONCE AREA IS STABILIZED LEAVE 2 FOOT HIGH BERM UNTIL GRASS IS ESTABLISHED AT TOE OF BERM LOAM AND SEED & MULCH BERM AREA FILL SEQUENCE NO SCALE PHASE I PHASE II-A PLACE MATERIAL WITH - EXCAVATE AREAS -SLOPE AWAY FROM SENSITIVE AREAS PRIOR TO PLACEMENT SITE LEAVING DIKES OF UNDISTURBED MATERIAL OR GRADE TO ENTRAP RUNOFF ON A LOCALIZED INSTALL SEDIMENT _ ENTRAPMENT DEVICES IN PROXIMITY OF DISTURBANCE IF MATERIAL CANNOT E PHASE II-B PHASE III PLACED AS IN PHASE 2-A PLACE MATERIAL WITH SLOPE PROTECT STEEP SLOPES FROM EROSION F EROSION POTENTIAL IS PRESENT, FORM DIKES DIVERT STABILIZE OUT-(NOT RETAIN) WATER TO SLOPES AND MULCH UNDISTURBED AREA CAPABLE IF REQUIRED SENSITIVE AREAS OF ALLOWING SEDIMENTATION. DEVICE TO RETAIN IMMEDIATELY UPON

EXCAVATION SEQUENCE

PHASE II

FINISH GRADE

EXCAVATE TOWARDS

-EXISTING GRADE

EXCAVATION

WORKING FACE

- SHALL ALWAYS

SHOULD BE AS REQUIRED

SLOPE AWAY FROM SENSITIVE AREA

PHASE

APPROPRIATE SEEDING

COMPACTED IN 6" LIFTS 6" MAXIMUM STONE SIZE

PIPE (MINIMUM)

NO ROCK, LEDGE, OR


TO BE WITHIN 6" OF PIPE

NO SCALE

LOAM AND SEED EXCAVATED AREAS

EXISTING GRADE

AS SOON AS POSSIBLE



HANNIGAN ENGINEERING, INC. CIVIL ENGINEERS & LAND SURVEYORS

8 MONUMENT SQUARE (978) 534-1234 (T LEOMINSTER, MASSACHUSETTS 01453 (978) 534-6060 (F


CONSTRUCTION DETAILS LEICESTER, MASSACHUSETTS

WWW.HANNIGANENGINEERING.COM

PREPARED FOR: ZP BATTERY DEVCO, LLC BRENDAN GOVE 10 E WORCESTER STREET SUITE 3A WORCESTER, MASSACHUSETTS 01604

DRWN: CMA

SCALE: NA CALC: CMA APPD: WDH CHKD: WDH DATE: SEP 21, 202 **FB**: 71–22 SRV: JEF JOB NO: 3010 SHEET 4 OF 5 PLAN NO:C-17-3 **TAB:** (4-5)DET




BOTTOM TRENCH AND


LATERAL

PATTERN


SPLICE ANCHOR

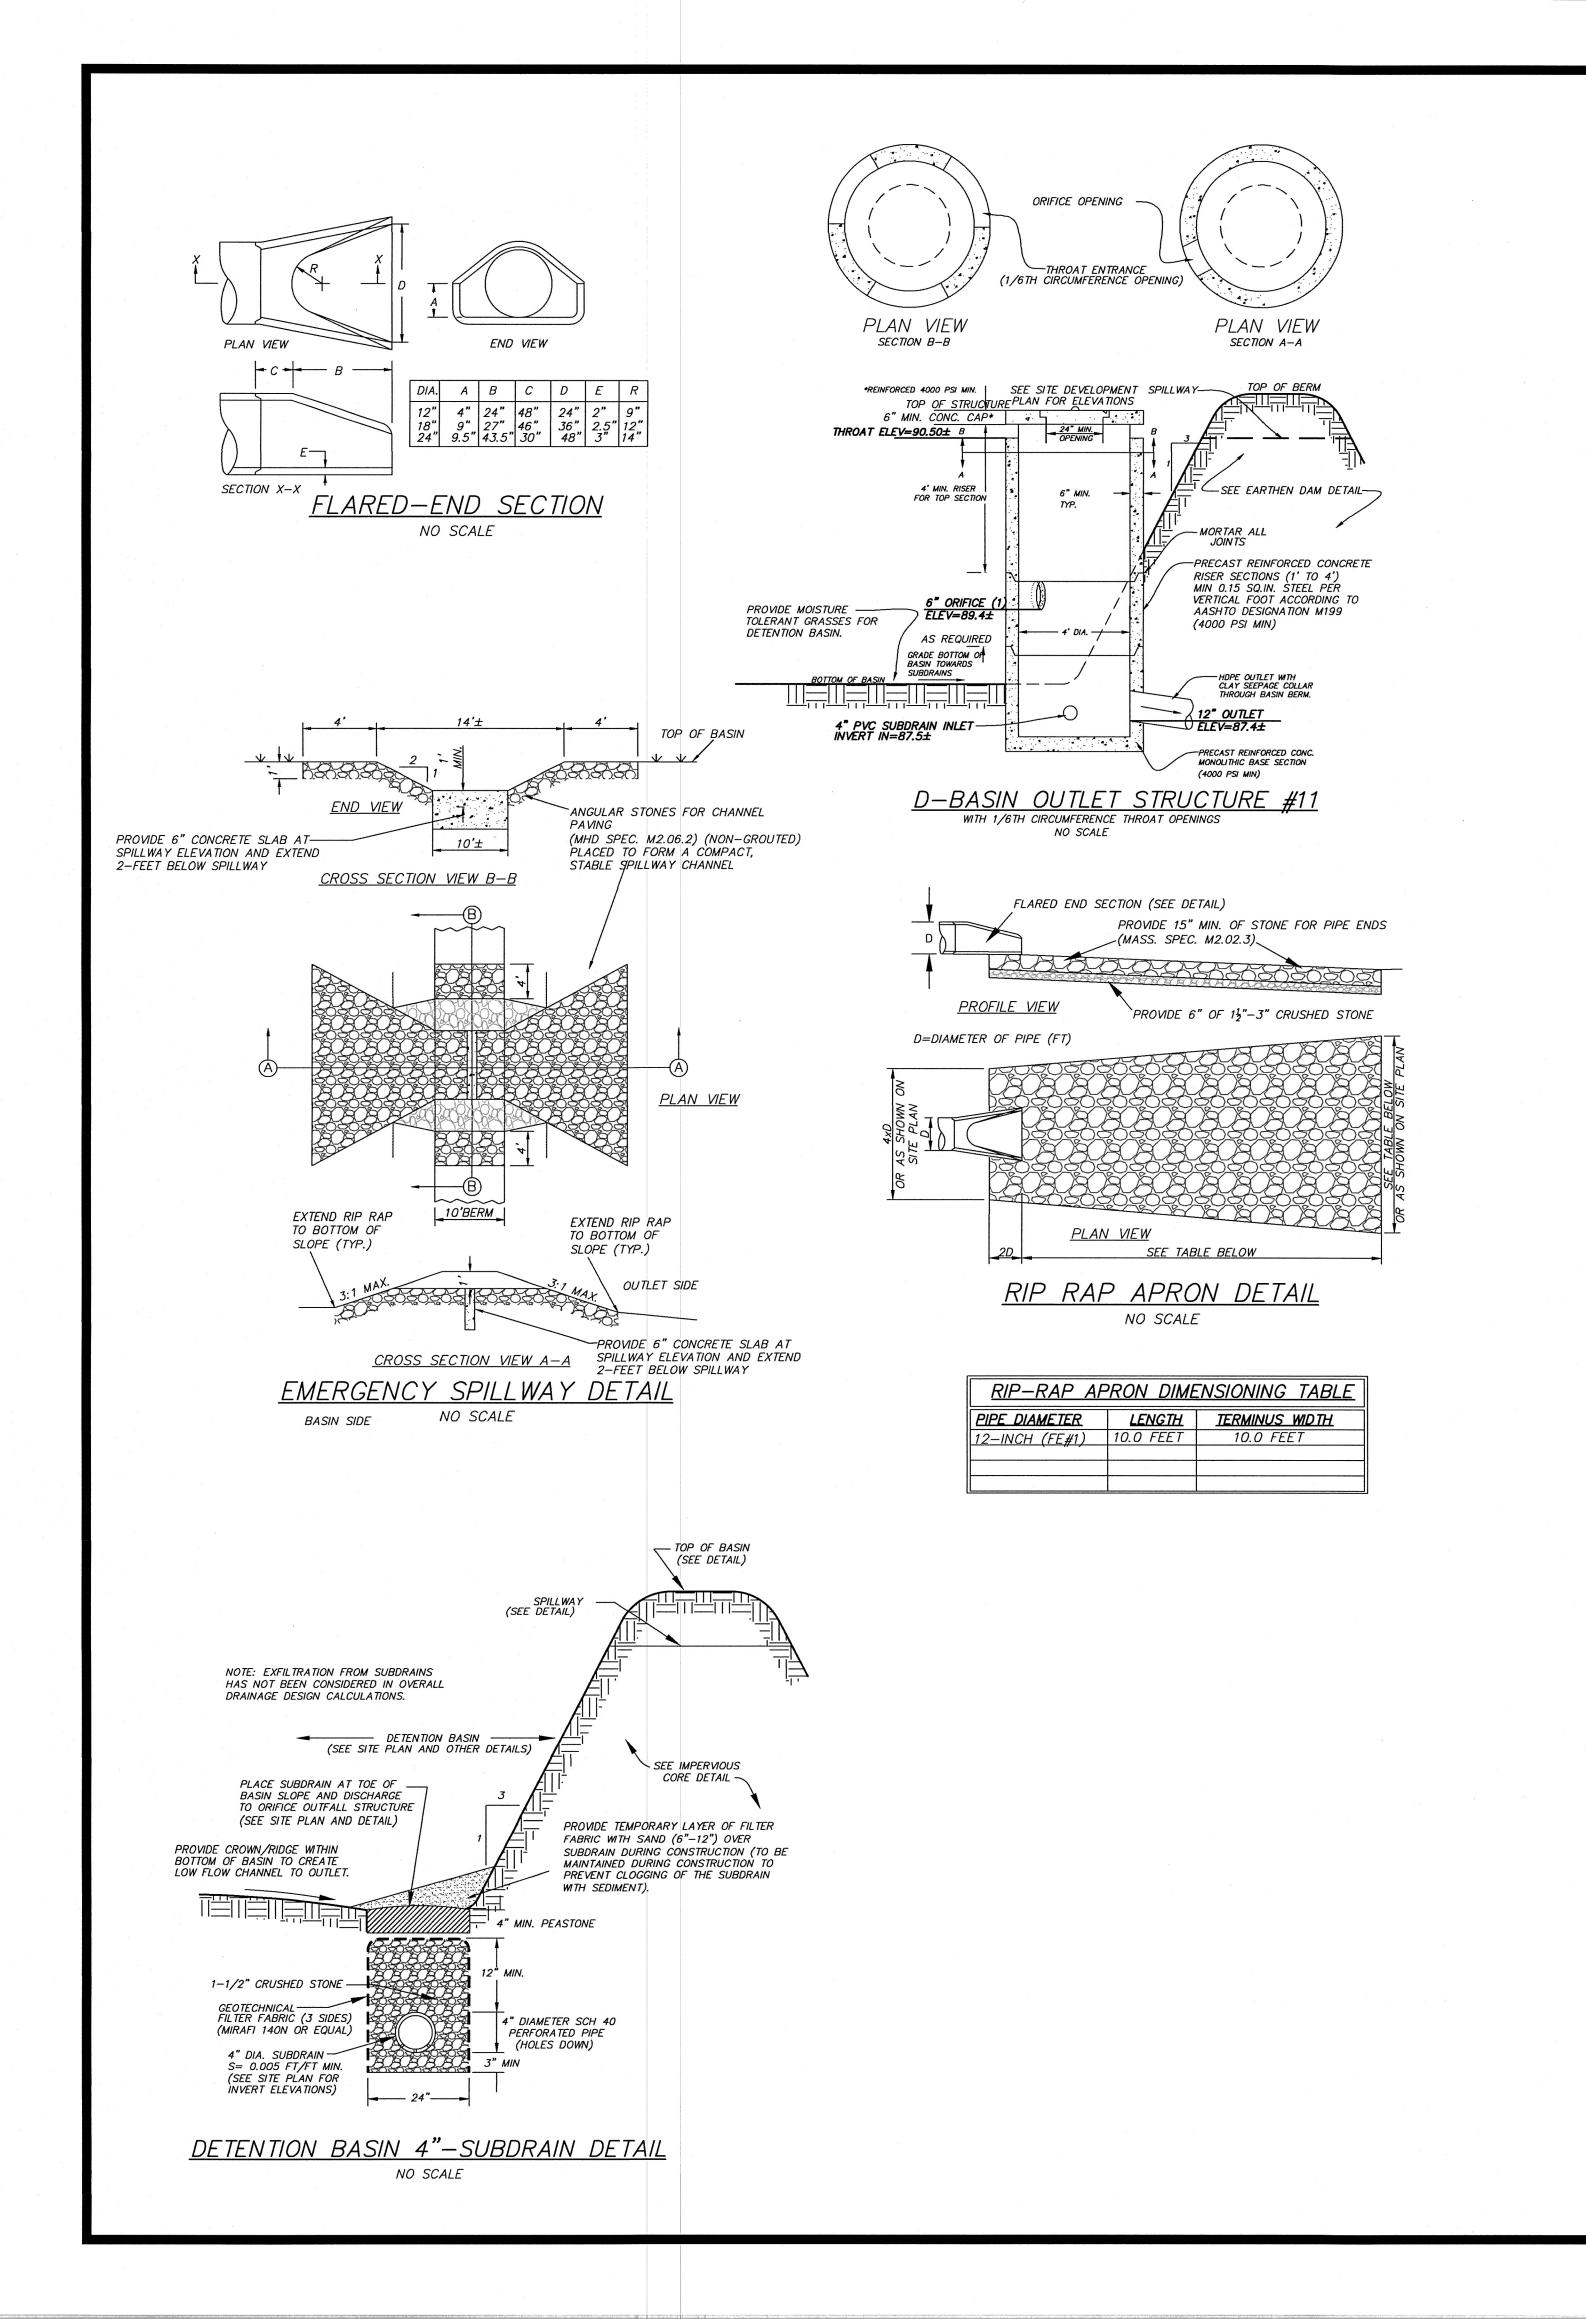


NOTE: FOUNDATION FOR BERM CONSTRUCTION SHALL BE CLEARED OF ALL TOP SOIL, ROCKS, DEBRIS, STUMPS, ETC. TO A FIRM SURFACE. IN NO CASE SHALL THIS EXCAVATION BE LESS THAN 12 INCHES SUBGRADE SHALL BE SCARIFIED AND MOISTENED TO A DEPTH OF 3 INCHES PRIOR TO PLACEMENT OF FILL.

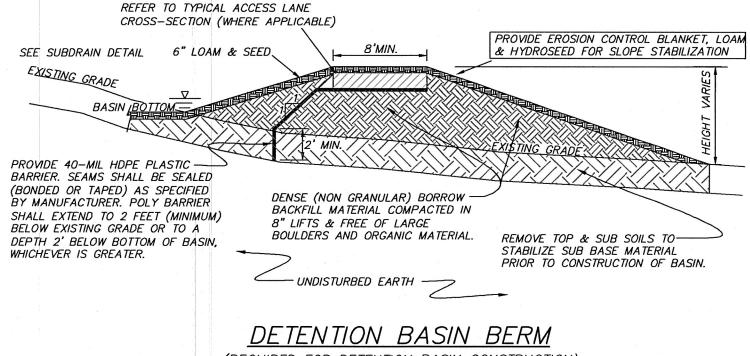

(REQUIRED FOR DETENTION BASIN CONSTRUCTION) NO SCALE

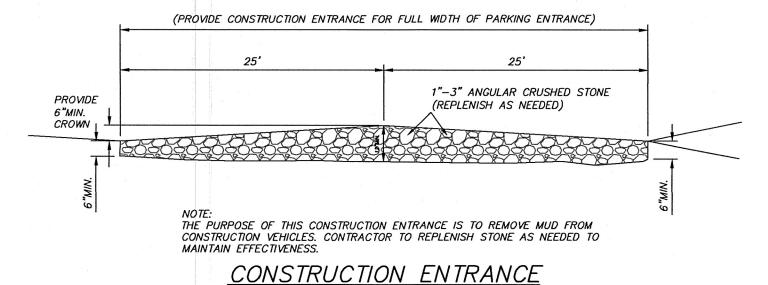

NO SCALE

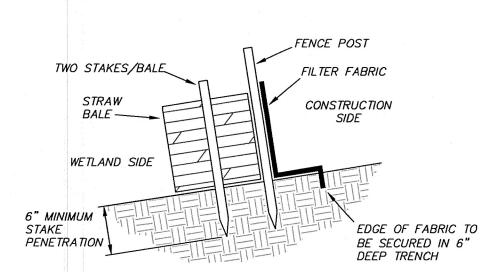

STRAW BALE WITH SILT FENCE DETAIL

STORMWATER OPERATION AND MAINTENANCE PLAN

THE FOLLOWING SHALL BE CONSIDERED THE OPERATION & MAINTENANCE PLAN (OMP) FOR THE STORMWATER COLLECTION FACILITY FOR THIS DEVELOPMENT. THIS OMP HAS BEEN PREPARED IN ACCORDANCE WITH THE STORMWATER MANAGEMENT POLICY AS ISSUE, BY THE DEPARTMENT OF ENVIRONMENTAL PROTECTION. SYSTEM OWNERSHIP

THE SYSTEM SHALL INCLUDE THE DRAINAGE INFRASTRUCTURE AND ALL OF ITS COMPONENTS AS SHOWN ON THE SITE DEVELOPMENT PLANS, INCLUDING THE DETENTION FACILITIES AND OUTFALL AREAS OF THE DRAINAGE SYSTEM. THE STRUCTURES OF THE SYSTEM SHALL INCLUDE THE DRAINAGE SWALES AND THE OUTFALL & CONTROL STRUCTURES. THE SYSTEM SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE CONSTRUCTION DETAILS AND THE APPROVED PLANS.

UPON THE COMPLETION OF CONSTRUCTION THE DRAINAGE SYSTEM DESCRIBED ABOVE AND AS DEPICTED ON THE SITE PLANS SHALL BECOME PROPERTY OF THE LAND OWNER, WITH SPECIFIC EASEMENT RIGHTS TO THE OPERATOR OF THE SOLAR SYSTEM TO MAINTAIN THE DRAINAGE SYSTEM AS DEPICTED ON THE APPROVED PLANS. SAID EASEMENT RIGHTS SHALL BE SPECIFICALLY DESCRIBED IN LEASE DOCUMENTS FOR THE PROJECT.

OUTFALL STRUCTURES:

SPILLWAYS

THE OPERATOR OF THE SOLAR SYSTEM SHALL BE CONSIDERED THE RESPONSIBLE PARTY FOR THE OPERATION AND MAINTENANCE OF THE STORMWATER MANAGEMENT SYSTEM. THE SYSTEM SHALL INCLUDE THE DRAINAGE INFRASTRUCTURE AND ALL OF ITS COMPONENTS AS SHOWN ON THE APPROVED PLANS. THE SYSTEM SHALL ALSO INCLUDE THE DETENTION FACILITIES AND THE OUTFALL AREAS OF THE DRAINAGE SYSTEM.

III. INSPECTION & MAINTENANCE SCHEDULE THE FOLLOWING MAINTENANCE SCHEDULE SHALL BE FOLLOWED IN ORDER TO MAINTAIN THE EFFECTIVENESS OF THE STORMWATER MANAGEMENT SYSTEM.

STRUCTURE TYPE MAINTENANCE RIP/RAP APRONS TWICE A YEAR EVERY 10 YEARS REMOVE DEBRIS & ADD STONE SUBDRAINS TWICE A YEAR EVERY 4 YEARS REPLACE PEASTONE MONTHLY (MAY-OCT) DETENTION BASINS MOW GRASS AREAS & REMOVE DEBRIS MONTHLY (MAY-OCT)

EVERY 10 YEARS

REMOVE SEDIMENT IF PRESENT

REMOVE DEBRIS & ADD STONE

40%

NOTE: THE DETENTION BASINS ON THIS PROJECT MAY GROW VEGETATION IN THE BOTTOM WHICH MAY INCLUDE SPECIES PART OF THE WETLAND PROTECTION ACT. THESE PLANTS SHALL NOT BE CONSTRUED AS HAVING PROTECTION UNDER THE ACT AND SHALL BE CONSIDERED OPPORTUNISTIC GROWTH PLANTS. ADDITIONALLY, THIS AREA SHALL NOT BE CONSIDERED A CONSTRUCTED WETLAND.

SEEDING OPERATION AND MAINTENANCE PLAN

THE OPERATOR OF THE SOLAR SYSTEM SHALL BE CONSIDERED THE RESPONSIBLE PARTY FOR THE OPERATION AND MAINTENANCE OF THE GRASS & VEGETATION. THE VEGETATION SHALL INCLUDE ALL OF ITS AREAS AS SHOWN ON THE APPROVED PLANS. THE SYSTEM SHALL ALSO INCLUDE THE GRASSED AREAS AROUND THE PANELS AND DRAINAGE

INSPECTION & MAINTENANCE SCHEDULE THE FOLLOWING MAINTENANCE SCHEDULE SHALL BE FOLLOWED IN ORDER TO MAINTAIN THE VEGETATED AREAS

MAINTENANCE ACTIVITY GRASS CUTTING GRASS HEIGHT TO BE ALLOWED TO GROW TO A HEIGHT OF NO MORE THAN 18 INCHES AND BE


CUT TO A HEIGHT OF 4 TO 6 INCHES. APPROPIATE SEED MIX AND APPLICATION RATES

THE FOLLOWING SEED SCHEDULE SHALL BE FOLLOWED IN ORDER TO PROPERLY MAINTAIN VEGETATED AREAS APPLICATION RATE SEED TYPE (NATIVE SEED REQUIRED) % OF MIX WILDFLOWER SEED MIX 5 TO 10 POUNDS PER ACRE 50% 10%

WHITE CLOVER SEED MIX 3 TO 5 POUNDS PER ACRE KENTUCKY BLUEGRASS 80 TO 100 POUNDS PER ACRE

THERE WILL NO HERBICIDES OR PESTICIDES USED ON THIS PROJECT.

TWICE A YEAR

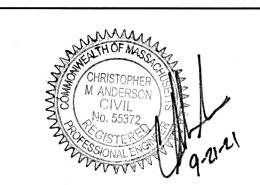

|HANNIGAN ENGINEERING, INC.

CIVIL ENGINEERS & LAND SURVEYORS

LEOMINSTER, MASSACHUSETTS 01453

8 MONUMENT SQUARE (978) 534-1234 (T)

CONSTRUCTION DETAILS

(978) 534-6060 (F)

SCALE: NA

DATE: SEP 21, 202

JOB NO: 3010

LEICESTER, MASSACHUSETTS

PREPARED FOR: ZP BATTERY DEVCO, LLC BRENDAN GOVE 10 E WORCESTER STREET SUITE 3A WORCESTER, MASSACHUSETTS 01604

APPLICANT: ZP BATTERY DEVCO, LLC DRWN: CMA CALC: CMA BRENDON GOVE 10 E. WORCESTER STREET, SUIT 3A CHKD: WDH APPD: WDH WORCESTER, MASSACHUSETTS 01604 <u>OWNER:</u> **FB:** 71–22 SRV: JEF WR ENTERPRISES, LLC 1323 MAIN STREET SHEET 5 OF 5 | PLAN NO:C-17-3 LEICESTER, MASSACHUSETTS 01524 TAB: (4-5) DET

TEL: